

NIKSUN NetOmni, and NetDetector/NetVCR/LogWave running Everest Software v5.1.6.3 Security Target

Document Version: 0.8



2400 Research Blvd
Suite 395
Rockville, MD 20850

Revision History:

Version	Date	Changes
Version 0.1	November 13, 2020	Initial Draft
Version 0.2	December 3, 2020	Updated based on review comments
Version 0.3	December 13, 2020	Minor updates
Version 0.4	December 18, 2020	Minor updates
Version 0.5	January 15, 2021	Ready for Check-in
Version 0.6	July 13, 2021	Addressed Check-in ECR comments
Version 0.7	November 24, 2021	Updated based on testing and checkout review
Version 0.8	January 06, 2022	Updated based on ECR comments

Contents

1	Introduction	5
1.1	Security Target and TOE Reference	5
1.2	TOE Overview	5
1.3	TOE Description.....	6
1.3.1	Physical Boundaries	6
1.3.2	Security Functions Provided by the TOE	6
1.3.3	TOE Documentation.....	8
1.4	TOE Environment	9
1.5	Product Functionality not Included in the Scope of the Evaluation	9
2	Conformance Claims	10
2.1	CC Conformance Claims	10
2.2	Protection Profile Conformance	10
2.2.1	Technical Decisions	10
3	Security Problem Definition	12
3.1	Threats	12
3.2	Assumptions.....	13
3.3	Organizational Security Policies	15
4	Security Objectives.....	16
4.1	Security Objectives for the Operational Environment.....	16
5	Security Requirements.....	17
5.1	Conventions	18
5.2	Security Functional Requirements.....	18
5.2.1	Security Audit (FAU).....	18
5.2.2	Cryptographic Support (FCS).....	21
5.2.3	Identification and Authentication (FIA)	25
5.2.4	Security Management (FMT)	27
5.2.5	Protection of the TSF (FPT)	28
5.2.6	TOE Access (FTA).....	29
5.2.7	Trusted Path/Channels (FTP)	29
5.3	TOE SFR Dependencies Rationale for SFRs	30
5.4	Security Assurance Requirements	30
5.5	Assurance Measures	30
6	TOE Summary Specifications.....	32

6.1	CAVP Algorithm Certificate Details	45
6.2	Cryptographic Key Destruction	45
7	Acronym Table	47

1 Introduction

The Security Target (ST) serves as the basis for the Common Criteria (CC) evaluation and identifies the Target of Evaluation (TOE), the scope of the evaluation, and the assumptions made throughout. This document will also describe the intended operational environment of the TOE, and the functional and assurance requirements that the TOE meets.

1.1 Security Target and TOE Reference

This section provides the information needed to identify and control the TOE and the ST.

Table 1 – TOE/ST Identification

Category	Identifier
ST Title	NIKSUN NetOmni, and NetDetector/NetVCR/LogWave running Everest software v5.1.6.3 Security Target
ST Version	0.8
ST Date	January 06, 2022
ST Author	Acumen Security, LLC
TOE Identifier	NIKSUN NetOmni, and NetDetector/NetVCR/LogWave running Everest software
TOE Hardware	9080, 9180, 12100, 12500
TOE Version	5.1.6.3
TOE Developer	NIKSUN, Inc.
Key Words	Network Device, Security Appliance

1.2 TOE Overview

The TOE includes the NIKSUN NetOmni, and NIKSUN NetDetector/NetVCR/LogWave appliances, running the software Everest version 5.1.6.3. NIKSUN NetOmni, and NetDetector/NetVCR/LogWave independently represents a TOE. Each of the appliances are running the exact same Everest software and the functionality is distinguished based on the licenses that are activated on the appliance.

NetOmni’s primary functionality is to provide an overview of critical operations of the monitored network. The overview includes monitoring business service disruptions, performance issues, and security incidents. NetOmni accomplishes this by providing performance monitoring, traffic analysis, and reporting systems for a network¹. NetOmni communicates to one or more NetDetector/NetVCR/LogWave appliances to collect data from distributed point solutions. The data is aggregated from many sources based on user-defined criteria so that it can be viewed as one flow. NetOmni generates reports based on the data collected that covers network-wide services, applications, and performance. Finally, NetOmni provides real-time network-wide analysis, forensics, and event alerting.

NetDetector primary functionality is to provide security monitoring of network traffic using IDS methods and statistical anomaly detection in order to safeguard networks against cyber-attacks. The anomaly detection uses user-defined and threshold-based anomalies². Users of NetDetector are notified of security breaches as soon as they occur. NetVCR is a solution for full packet capture with stream-to-disk recording,

¹ Note: NetOmni’s performance monitoring, traffic analysis, forensics, event alerting and reporting features are not evaluated as part of the CC evaluation.

² Note: NetDetector/NetVCR/LogWave traffic monitoring, IDS, anomaly detection, application analytics, and event analytics features are not evaluated as part of the CC evaluation.

real-time indexing and application analytics for network/application performance. LogWave is an advanced log and event analytics engine that provides real-time analysis of security alerts generated by applications or services.

NetOmni, and NetDetector/NetVCR/LogWave appliances running Everest software individually represent the TOE. They are identical in terms for security and management features and independently meet all the mandatory security requirements of the Protection Profile. The TOE allows Security Administrators to access the TOE through a local CLI, remote CLI via SSH, and a web GUI via TLS/HTTPS.

1.3 TOE Description

This section provides an overview of the TOE architecture, including physical boundaries, security functions, and relevant TOE documentation and references.

1.3.1 Physical Boundaries

The physical boundaries of the TOE consist of the physical appliance including all the hardware and the software. The TOE appliance model numbers and corresponding processor are shown in table below.

Table 2 - TOE Hardware Models

Appliance	Model Number	Processor
NetOmni	9080	Xeon Gold 6140 (Skylake)
	9180	Xeon Gold 6140 (Skylake)
NetDetector/NetVCR/LogWave	12100	Xeon Gold 6140 (Skylake)
	12500	Xeon Gold 6152 (Skylake)

The physical boundaries of the TOEs are illustrated in the figure below with the red dotted line. Table 3 provides a list of environmental components that are part of the evaluated configuration.

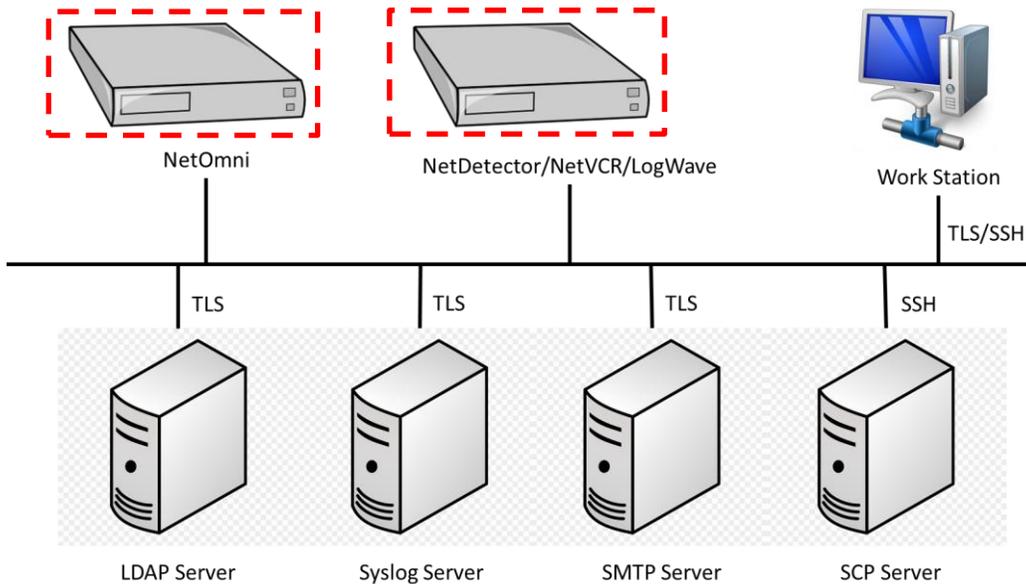


Figure 1

1.3.2 Security Functions Provided by the TOE

The TOE provides the security functions required by NDcPP v2.2e.

1.3.2.1 Security Audit

The TOE provides extensive auditing capabilities. The TOE can audit events related to cryptographic functionality, identification and authentication, and administrative actions. The TOE generates an audit record for each auditable event. The TOE keeps local and remote audit records of security relevant events. The TOE internally maintains the date and time, which can be set manually. Each security relevant audit event has the date, timestamp, event description, and subject identity. The TOE provides the administrator with a circular audit trail. The TOE can be configured to transmit its audit messages to an external syslog server over an encrypted channel using TLS.

1.3.2.2 Cryptographic Support

The TOE relies on its NIKOS FIPS Object Module and NIKOS Java Object Module to implement cryptographic methods and trusted channels. The TOE uses mutually authenticated TLS to secure the automatic transfer of syslog audit files and VAR logs to the Syslog Server. The TOE uses TLS to secure the connection to the LDAP/AD Server for remote authentication. When a user utilizes the “Forgot Username/Password” feature on the login screen, the TOE will send an email to the SMTP Server over a protected TLS channel. TOE communicates with another NIKSUN appliance over TLS. X.509v3 certificates are used to support authentication mechanisms. SSH is used to secure the remote CLI interface for remote management of the TOE. SSH is also used to secure the communication with the SCP Server when the TOE receives software image updates. TLS/HTTPS is used to secure the connection for remote management of the TOE via the web GUI as well as connections to other devices. The TOE will deny any connections for disallowed protocols and invalid X.509v3 certificates.

1.3.2.3 Identification and Authentication

The TOE verifies the identity of users connecting to the TOE. All users must be identified and authenticated before being allowed to perform actions on the TOE. This is true of users accessing the TOE via the local console, or through protected paths using the remote CLI via SSH or the web GUI via TLS 1.2. Users can authenticate to the TOE using a username and password. In addition, when authenticating by the remote CLI, users can instead use SSH public-key authentication. LDAP can be configured to provide external authentication. Passwords can consist of upper-case letters, lower-case letters, numbers, and a set of selected special characters. Password information is never revealed during the authentication process including during login failures. Before a user authenticates to the device, a customizable warning banner is configured to be displayed. In addition, via the web GUI only, the user has the option to use a “Forgot Username/Password” feature prior to authenticating.

The TOE uses X.509v3 certificates to perform mutual authentication for the Syslog Server. The TSF determines the validity of the certificates by confirming the validity of the certificate chain, and verifying that the certificate chain ends in a trusted Certificate Authority (CA). The TSF connects with a CRL distribution point through HTTP to confirm certificate validity and to access certificate revocation lists (CRL).

1.3.2.4 Security Management

The TOE has a role-based authentication system where roles (permissions) are assigned to groups for the web GUI. Authorized actions for a particular user are dependent on which group they are assigned to. There are 4 initial groups: Administrator, Account Administrator, Advanced Users, and Users. Only users assigned to the Administrator group are capable of performing SFR related management functions via the web GUI and thus, are Security Administrators in the context of the evaluation. The VCR user is the Security Administrator user for the remote and local CLI and is able to update the TOE’s software and verify it via published hash.

The NDcPP's definition of "role" is synonymous with NIKSUN's definition of "permissions". NIKSUN's terminology fits into the Protection Profiles by using the term "user roles" in place of "user permissions". For the remainder of this document, "user permissions" is used in order to match the terminology used by Common Criteria.

1.3.2.5 Protection of the TSF

The TOE stores passwords in a variety of locations depending on their use and encryption. They cannot be viewed by any user regardless of the user's role. The VCR user passwords are stored in the OS hashed by SHA-512. Web GUI passwords are stored in the PostgreSQL Database hashed with SHA-256. Pre-shared keys, symmetric keys, and private keys cannot be accessed in plaintext form by any user. There is an underlying hardware clock that is used for accurate timekeeping and is set by the Security Administrator. Power-on self-tests are executed automatically when the cryptographic module is loaded into memory. It verifies its own integrity using an HMAC-SHA-256 digest computed at build time and also tests all algorithms for integrity. The TOE also performs self-tests on the CPU, RAM, and disk components. The TOE's DRBG also performs its own health tests.

The version of the TOE is verified via the CLI or web GUI. The TOE is updated by the VCR user via the CLI. Updated software images are downloaded to the SCP Server and are transferred to the TOE via the SCP using SSH. The administrator is also capable of copying the image to a CD and manually loading it to the TOE. The TOE conducts a hash verification on the system image using SHA-256 against the known hash to ensure the integrity of the update.

1.3.2.6 TOE Access

Before any user authenticates to the TOE, the TOE displays a configurable Security Administrator banner for the web GUI. The local and remote CLI interfaces display the default security banner prior to authentication that is also configurable. The TOE can terminate local CLI, remote CLI, and web GUI sessions after a specified time period of inactivity. Administrative users have the capability to terminate their own sessions.

1.3.2.7 Trusted Path/Channels

The TOE connects and sends data to IT entities that reside in the Operational Environment via trusted channels. In the evaluated configuration, the TOE connects to Syslog Server via TLS to send audit data for remote storage. The TLS connection to the Syslog server is over mutually authenticated TLS channel. TLS is used to connect to an SMTP email server for secure credentials reset. TLS is also used for the TOE's connection with the LDAP/AD Server for its remote authentication store. TLS is used for the transfer of data between the NIKSUN appliances. SSH is used for the connection to the SCP Server when the TOE receives software image updates.

TLS/HTTPS and SSH are used for remote administration of the TOE via the web GUI and remote CLI respectively.

1.3.3 TOE Documentation

The following documents are essential to understanding and controlling the TOE in the evaluated configuration:

- NIKSUN NetOmni, NetDetector/NetVCR/LogWave running Everest software v5.1.6.3 Common Criteria Guidance Addendum [AGD]

- NIKSUN NetOmni, NetDetector/NetVCR/LogWave running Everest software v5.1.6.3 Security Target
- NIKSUN Appliance Security Solutions NikOS Everest User Guide
- NIKSUN NetOmni NikOS Everest User Guide
- NIKSUN NetOmni NikOS Everest Quick Start Guide
- NIKSUN NetDetector NikOS Everest Quick Start Guide
- NIKSUN Security Hardening Guide Release 5.1.6.x User Guide

1.4 TOE Environment

The following environmental components are required to operate the TOE in the evaluated configuration:

Table 3 –Environmental Components

Components	Description
NIKSUN appliance	Another instance of the TOE
LDAP Server	Remote authentication
SCP Server	Firmware updates via an SCP server
SMTP Server	Email server
Syslog Server	External storage for audit logs
Workstation	Local or remote management

1.5 Product Functionality not Included in the Scope of the Evaluation

The following product functionality is not included in the CC evaluation:

- Performance monitoring, service disruptions and forensics
- Traffic and network monitoring and analysis
- Event analytics, alerting, and reporting
- Security incidents, IDS, and anomaly detection

2 Conformance Claims

This section identifies the TOE conformance claims, conformance rationale, and relevant Technical Decisions (TDs).

2.1 CC Conformance Claims

The TOE is conformant to the following:

- Common Criteria for Information Technology Security Evaluations Part 1, Version 3.1, Revision 5, April 2017
- Common Criteria for Information Technology Security Evaluations Part 2, Version 3.1, Revision 5, April 2017 (Extended)
- Common Criteria for Information Technology Security Evaluations Part 3, Version 3.1, Revision 5, April 2017 (Conformant)

2.2 Protection Profile Conformance

This ST claims exact conformance to the Collaborated Protection Profiles for Network Devices, Version 2.2e, March 27, 2020.

2.2.1 Technical Decisions

All NIAP Technical Decisions (TDs) issued to date and applicable to NDcPP v2.2e have been considered. Table 4 identifies all applicable TDs.

Table 4 – Relevant Technical Decisions

Technical Decision	Applicable (Y/N)	Exclusion Rationale (if applicable)
TD0527: Updated to Certificate Revocation Testing (FIA_X509_EXT.1)	No	Elliptic Curve Cryptography is not claimed by the TOE.
TD0528: NIT Technical Decision for Missing EAs for FCS_NTP_EXT.1.4	No	FCS_NTP_EXT.1 is not claimed by the TOE.
TD0536: NIT Technical Decision for Update Verification Inconsistency	Yes	
TD0537: NIT Technical Decision for Incorrect reference to FCS_TLSC_EXT.2.3	Yes	
TD0538: NIT Technical Decision for Outdated link to allowed-with list	Yes	
TD0546: NIT Technical Decision for DTLS - clarification of Application Note 63	No	DTLS is not claimed by the TOE.
TD0547: NIT Technical Decision for Clarification on developer disclosure of AVA_VAN	Yes	
TD0555: NIT Technical Decision for RFC Reference incorrect in TLSS Test	Yes	
TD0556: NIT Technical Decision for RFC 5077 question	Yes	
TD0563: NIT Technical Decision for Clarification of audit date information	Yes	
TD0564: NIT Technical Decision for Vulnerability Analysis Search Criteria	Yes	

Technical Decision	Applicable (Y/N)	Exclusion Rationale (if applicable)
TD0569: NIT Technical Decision for Session ID Usage Conflict in FCS_DTLSS_EXT.1.7	Yes	
TD0570: NIT Technical Decision for Clarification about FIA_AFL.1	Yes	
TD0571: NIT Technical Decision for Guidance on how to handle FIA_AFL.1	Yes	
TD0572: NIT Technical Decision for Restricting FTP_ITC.1 to only IP address identifiers	Yes	
TD0580: NIT Technical Decision for clarification about use of DH14 in NDcPPv2.2e	Yes	
TD0581: NIT Technical Decision for Elliptic curve-based key establishment and NIST SP 800-56Arev3	No	Elliptic curves are not claimed as part of FCS_CKM.2.
TD0591: NIT Technical Decision for Virtual TOEs and hypervisors	No	The TOE is not a virtual TOE.
TD0592: NIT Technical Decision for Local Storage of Audit Records	Yes	

3 Security Problem Definition

The security problem definition has been taken directly from the claimed PP and any relevant EPs/Modules/Packages specified in Section 2.2 and is reproduced here for the convenience of the reader. The security problem is described in terms of the threats that the TOE is expected to address, assumptions about the operational environment, and any Organizational Security Policies (OSPs) that the TOE is expected to enforce.

3.1 Threats

The threats included in Table 5 are drawn directly from the PP and any EPs/Modules/Packages specified in Section 2.2.

Table 5 – Threats

ID	Threat
T.UNAUTHORIZED_ADMINISTRATOR_ACCESS	Threat agents may attempt to gain Administrator access to the Network Device by nefarious means such as masquerading as an Administrator to the device, masquerading as the device to an Administrator, replaying an administrative session (in its entirety, or selected portions), or performing man-in-the-middle attacks, which would provide access to the administrative session, or sessions between Network Devices. Successfully gaining Administrator access allows malicious actions that compromise the security functionality of the device and the network on which it resides.
T.WEAK_CRYPTOGRAPHY	Threat agents may exploit weak cryptographic algorithms or perform a cryptographic exhaust against the key space. Poorly chosen encryption algorithms, modes, and key sizes will allow attackers to compromise the algorithms, or brute force exhaust the key space and give them unauthorized access allowing them to read, manipulate and/or control the traffic with minimal effort.
T.UNTRUSTED_COMMUNICATION_CHANNELS	Threat agents may attempt to target Network Devices that do not use standardized secure tunneling protocols to protect the critical network traffic. Attackers may take advantage of poorly designed protocols or poor key management to successfully perform man-in-the-middle attacks, replay attacks, etc. Successful attacks will result in loss of confidentiality and integrity of the critical network traffic, and potentially could lead to a compromise of the Network Device itself.
T.WEAK_AUTHENTICATION_ENDPOINTS	Threat agents may take advantage of secure protocols that use weak methods to authenticate the endpoints, e.g. a shared password that is guessable or transported as plaintext. The consequences are

ID	Threat
	the same as a poorly designed protocol, the attacker could masquerade as the Administrator or another device, and the attacker could insert themselves into the network stream and perform a man-in-the-middle attack. The result is the critical network traffic is exposed and there could be a loss of confidentiality and integrity, and potentially the Network Device itself could be compromised.
T.UPDATE_COMPROMISE	Threat agents may attempt to provide a compromised update of the software or firmware which undermines the security functionality of the device. Non-validated updates or updates validated using non-secure or weak cryptography leave the update firmware vulnerable to surreptitious alteration.
T.UNDETECTED_ACTIVITY	Threat agents may attempt to access, change, and/or modify the security functionality of the Network Device without Administrator awareness. This could result in the attacker finding an avenue (e.g., misconfiguration, flaw in the product) to compromise the device and the Administrator would have no knowledge that the device has been compromised
T.SECURITY_FUNCTIONALITY_COMPROMISE	Threat agents may compromise credentials and device data enabling continued access to the Network Device and its critical data. The compromise of credentials includes replacing existing credentials with an attacker’s credentials, modifying existing credentials, or obtaining the Administrator or device credentials for use by the attacker.
T.PASSWORD_CRACKING	Threat agents may be able to take advantage of weak administrative passwords to gain privileged access to the device. Having privileged access to the device provides the attacker unfettered access to the network traffic and may allow them to take advantage of any trust relationships with other Network Devices.
T.SECURITY_FUNCTIONALITY_FAILURE	An external, unauthorized entity could make use of failed or compromised security functionality and might therefore subsequently use or abuse security functions without prior authentication to access, change or modify device data, critical network traffic or security functionality of the device.

3.2 Assumptions

The assumptions included in Table 6 are drawn directly from PP and any relevant EPs/Modules/Packages.

Table 6 – Assumptions

ID	Assumption
A.PHYSICAL_PROTECTION	<p>The Network Device is assumed to be physically protected in its operational environment and not subject to physical attacks that compromise the security or interfere with the device’s physical interconnections and correct operation. This protection is assumed to be sufficient to protect the device and the data it contains. As a result, the cPP does not include any requirements on physical tamper protection or other physical attack mitigations. The cPP does not expect the product to defend against physical access to the device that allows unauthorized entities to extract data, bypass other controls, or otherwise manipulate the device. For vNDs, this assumption applies to the physical platform on which the VM runs.</p>
A.LIMITED_FUNCTIONALITY	<p>The device is assumed to provide networking functionality as its core function and not provide functionality/services that could be deemed as general purpose computing. For example, the device should not provide a computing platform for general purpose applications (unrelated to networking functionality).</p>
A.NO_THRU_TRAFFIC_PROTECTION	<p>A standard/generic Network Device does not provide any assurance regarding the protection of traffic that traverses it. The intent is for the Network Device to protect data that originates on or is destined to the device itself, to include administrative data and audit data. Traffic that is traversing the Network Device, destined for another network entity, is not covered by the ND cPP. It is assumed that this protection will be covered by cPPs and PP-Modules for particular types of Network Devices (e.g., firewall).</p>
A.TRUSTED_ADMINISTRATOR	<p>The Security Administrator(s) for the Network Device are assumed to be trusted and to act in the best interest of security for the organization. This includes appropriately trained, following policy, and adhering to guidance documentation. Administrators are trusted to ensure passwords/credentials have sufficient strength and entropy and to lack malicious intent when administering the device. The Network Device is not expected to be capable of defending against a malicious Administrator that actively works to bypass or compromise the security of the device.</p> <p>For TOEs supporting X.509v3 certificate-based authentication, the Security Administrator(s) are expected to fully validate (e.g. offline verification) any CA certificate (root CA certificate or intermediate CA certificate) loaded into the TOE’s trust store (aka 'root store', 'trusted CA Key Store', or similar) as a trust anchor prior to use (e.g. offline verification).</p>

ID	Assumption
A.REGULAR_UPDATES	The Network Device firmware and software is assumed to be updated by an Administrator on a regular basis in response to the release of product updates due to known vulnerabilities.
A.ADMIN_CREDENTIALS_SECURE	The Administrator’s credentials (private key) used to access the Network Device are protected by the platform on which they reside.
A.RESIDUAL_INFORMATION	The Administrator must ensure that there is no unauthorized access possible for sensitive residual information (e.g. cryptographic keys, keying material, PINs, passwords etc.) on networking equipment when the equipment is discarded or removed from its operational environment.

3.3 Organizational Security Policies

The OSPs included in Table 7 are drawn directly from the PP and any relevant EPs/Modules/Packages.

Table 7 – OSPs

ID	OSP
P.ACCESS_BANNER	The TOE shall display an initial banner describing restrictions of use, legal agreements, or any other appropriate information to which users consent by accessing the TOE.

4 Security Objectives

The security objectives have been taken directly from the claimed PP and any relevant EPs/Modules/Packages and are reproduced here for the convenience of the reader.

4.1 Security Objectives for the Operational Environment

Security objectives for the operational environment assist the TOE in correctly providing its security functionality. These objectives, which are found in the table below, track with the assumptions about the TOE operational environment.

Table 8 – Security Objectives for the Operational Environment

ID	Objectives for the Operational Environment
OE.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it contains, is provided by the environment.
OE.NO_GENERAL_PURPOSE	There are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE. Note: For vNDs the TOE includes only the contents of the its own VM, and does not include other VMs or the VS.
OE.NO_THRU_TRAFFIC_PROTECTION	The TOE does not provide any protection of traffic that traverses it. It is assumed that protection of this traffic will be covered by other security and assurance measures in the operational environment.
OE.TRUSTED_ADMN	<p>Security Administrators are trusted to follow and apply all guidance documentation in a trusted manner. For vNDs, this includes the VS Administrator responsible for configuring the VMs that implement ND functionality.</p> <p>For TOEs supporting X.509v3 certificate-based authentication, the Security Administrator(s) are assumed to monitor the revocation status of all certificates in the TOE's trust store and to remove any certificate from the TOE's trust store in case such certificate can no longer be trusted.</p>
OE.UPDATE	The TOE firmware and software is updated by an Administrator on a regular basis in response to the release of product updates due to known vulnerabilities.
OE.ADMIN_CREDENTIALS_SECURE	The Administrator's credentials (private key) used to access the TOE must be protected on any other platform on which they reside.
OE.RESIDUAL_INFORMATION	The Security Administrator ensures that there is no unauthorized access possible for sensitive residual information (e.g. cryptographic keys, keying material, PINs, passwords etc.) on networking equipment when the equipment is discarded or removed from its operational environment. For vNDs, this applies when the physical platform on which the VM runs is removed from its operational environment.

5 Security Requirements

This section identifies the Security Functional Requirements (SFRs) for the TOE. The SFRs included in this section are derived from Part 2 of the Common Criteria for Information Technology Security Evaluation, Version 3.1, Revisions 5, September 2017, and all international interpretations.

Table 9 – SFRs

Requirement	Description
FAU_GEN.1	Audit Data Generation
FAU_GEN.2	User Identity Association
FAU_STG_EXT.1	Protected Audit Event Storage
FCS_CKM.1	Cryptographic Key Generation
FCS_CKM.2	Cryptographic Key Establishment
FCS_CKM.4	Cryptographic Key Destruction
FCS_COP.1/DataEncryption	Cryptographic Operation (AES Data Encryption/Decryption)
FCS_COP.1/SigGen	Cryptographic Operation (Signature Generation and Verification)
FCS_COP.1/Hash	Cryptographic Operation (Hash Algorithm)
FCS_COP.1/KeyedHash	Cryptographic Operation (Keyed Hash Algorithm)
FCS_HTTPS_EXT.1	HTTPS Protocol
FCS_SSHC_EXT.1	SSH Client Protocol
FCS_SSHS_EXT.1	SSH Server Protocol
FCS_TLSC_EXT.1	TLS Client Protocol without Mutual Authentication
FCS_TLSC_EXT.2	TLS Client Support for Mutual Authentication
FCS_TLSS_EXT.1	TLS Server Protocol
FCS_RBG_EXT.1	Random Bit Generation
FIA_AFL.1	Authentication Failure Management
FIA_PMG_EXT.1	Password Management
FIA_UIA_EXT.1	User Identification and Authentication
FIA_UAU_EXT.2	Password-based Authentication Mechanism
FIA_UAU.7	Protected Authentication Feedback
FIA_X509_EXT.1/Rev	X.509 Certificate Validation
FIA_X509_EXT.2	X.509 Certificate Authentication
FIA_X509_EXT.3	X.509 Certificate Requests
FMT_MOF.1/ManualUpdate	Management of Security Functions Behaviour
FMT_MTD.1/CoreData	Management of TSF Data
FMT_MTD.1/CryptoKeys	Management of TSF Data
FMT_SMF.1	Specification of Management Functions
FMT_SMR.2	Restrictions on security roles
FPT_SKP_EXT.1	Protection of TSF Data (for reading of all pre-shared, symmetric and private keys)
FPT_APW_EXT.1	Protection of Administrator Passwords
FPT_TST_EXT.1	TSF Testing
FPT_STM_EXT.1	Reliable Time Stamps
FPT_TUD_EXT.1	Trusted Update
FTA_SSL.3	TSF-initiated Termination
FTA_SSL.4	User-initiated Termination
FTA_SSL_EXT.1	TSF-initiated Session Locking
FTA_TAB.1	Default TOE Access Banner
FTP_ITC.1	Inter-TSF Trusted Channel
FTP_TRP.1/Admin	Trusted Path

5.1 Conventions

The CC allows the following types of operations to be performed on the functional requirements: assignments, selections, refinements, and iterations. The following font conventions are used within this document to identify operations defined by CC:

- Assignment: Indicated with *italicized* text;
- Refinement: Indicated with **bold** text;
- Selection: Indicated with underlined text;
- Iteration: Indicated by appending the iteration identifier after a slash, e.g., /SigGen.
- Where operations were completed in the PP and relevant EPs/Modules/Packages, the formatting used in the PP has been retained.
- Extended SFRs are identified by the addition of “EXT” after the requirement name.

5.2 Security Functional Requirements

This section includes the security functional requirements for this ST.

5.2.1 Security Audit (FAU)

5.2.1.1 FAU_GEN.1 Audit Data Generation

FAU_GEN.1.1

The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shut-down of the audit functions;
- b) Auditable events for the not specified level of audit; and
- c) *All administrative actions comprising:*
 - *Administrative login and logout (name of user account shall be logged if individual user accounts are required for Administrators).*
 - *Changes to TSF data related to configuration changes (in addition to the information that a change occurred it shall be logged what has been changed).*
 - *Generating/import of, changing, or deleting of cryptographic keys (in addition to the action itself a unique key name or key reference shall be logged).*
 - *Resetting passwords (name of related user account shall be logged).*
 - *[no other actions];*
- d) *Specifically defined auditable events listed in Table 10.*

FAU_GEN.1.2

The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity, and the outcome (success or failure) *of the event*; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the cPP/ST, *information specified in column three of Table 10.*

Table 10 – Security Functional Requirements and Auditable Events

Requirement	Auditable Events	Additional Audit Record Contents
FAU_GEN.1	None	None
FAU_GEN.2	None	None
FAU_STG_EXT.1	None	None
FCS_CMK.1	None	None
FCS_CKM.2	None	None
FCS_CKM.4	None	None

Requirement	Auditable Events	Additional Audit Record Contents
FCS_COP.1/DataEncryption	None	None
FCS_COP.1/SigGen	None	None
FCS_COP.1/Hash	None	None
FCS_COP.1/KeyedHash	None	None
FCS_RBG_EXT.1	None	None
FCS_HTTPS_EXT.1	Failure to establish a HTTPS Session	Reason for failure
FCS_SSHC_EXT.1	Failure to establish an SSH session	Reason for failure
FCS_SSHS_EXT.1	Failure to establish an SSH session	Reason for failure
FCS_TLSC_EXT.1	Failure to establish a TLS Session	Reason for failure
FCS_TLSC_EXT.2	None	None
FCS_TLSS_EXT.1	Failure to establish a TLS Session	Reason for failure
FIA_AFL.1	Unsuccessful login attempts limit is met or exceeded	Origin of the attempt (e.g., IP address)
FIA_PMG_EXT.1	None	None
FIA_UIA_EXT.1	All use of identification and authentication mechanism	Origin of the attempt (e.g., IP address)
FIA_UAU_EXT.2	All use of identification and authentication mechanism	Origin of the attempt (e.g., IP address)
FIA_UAU.7	None	None
FIA_X509_EXT.1/Rev	<ul style="list-style-type: none"> Unsuccessful attempt to validate a certificate Any addition, replacement or removal of trust anchors in the TOE's trust store 	<ul style="list-style-type: none"> Reason for failure of certificate validation Identification of certificates added, replaced or removed as trust anchor in the TOE's trust store
FIA_X509_EXT.2	None	None
FIA_X509_EXT.3	None	None
FMT_MOF.1/ManualUpdate	Any attempt to initiate a manual update	None
FMT_MTD.1/CoreData	None	None
FMT_MTD.1/CryptoKeys	None	None
FMT_SMF.1	All management activities of TSF data	None
FMT_SMR.2	None	None
FPT_SKP_EXT.1	None	None
FPT_APW_EXT.1	None	None
FPT_TST_EXT.1	None.	None.
FPT_STM_EXT.1	Discontinuous changes to time - either Administrator actuated or changed via an automated process (Note that no continuous changes to time need to be logged. See also application note on FPT_STM_EXT.1)	For discontinuous changes to time: The old and new values for the time. Origin of the attempt to change time for success and failure (e.g., IP address).

Requirement	Auditable Events	Additional Audit Record Contents
FPT_TUD_EXT.1	Initiation of update; result of the update attempt (success or failure)	None
FTA_SSL.3	The termination of a remote session by the session locking mechanism	None
FTA_SSL.4	The termination of an interactive session	None
FTA_SSL_EXT.1	The termination of a local session by the session locking mechanism	None
FTA_TAB.1	None	None
FTP_ITC.1	<ul style="list-style-type: none"> Initiation of the trusted channel Termination of the trusted channel Failure of the trusted channel functions 	Identification of the initiator and target of failed trusted channels establishment attempt
FTP_TRP.1/Admin	<ul style="list-style-type: none"> Initiation of the trusted path Termination of the trusted path. Failure of the trusted path functions. 	None

5.2.1.2 FAU_GEN.2 User Identity Association

FAU_GEN.2.1

For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

5.2.1.3 FAU_STG_EXT.1 Protected Audit Event Storage

FAU_STG_EXT.1.1

The TSF shall be able to transmit the generated audit data to an external IT entity using a trusted channel according to FTP_ITC.1.

FAU_STG_EXT.1.2

The TSF Shall be able to store generated audit data on the TOE itself. In addition [

- The TOE shall consist of a single standalone component that stores audit data locally,*
-].

FAU_STG_EXT.1.3

The TSF shall [overwrite previous audit records according to the following rule: [overwrite oldest log file once configured log file limits are reached]] when the local storage space for audit data is full.

5.2.2 Cryptographic Support (FCS)

5.2.2.1 FCS_CKM.1 Cryptographic Key Generation

FCS_CKM.1.1

The TSF shall generate **asymmetric** cryptographic key in accordance with a specified cryptographic key generation algorithm: [

- *RSA schemes using cryptographic key sizes of 2048-bit or greater that meet the following: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Appendix B.3;*
- *FFC Schemes using ‘safe-prime’ groups that meet the following: “NIST Special Publication 800-56A Revision 3, Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” and [RFC 3526].*

] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

5.2.2.2 FCS_CKM.2 Cryptographic Key Establishment

FCS_CKM.2.1

The TSF shall **perform** cryptographic **key establishment** in accordance with a specified cryptographic key **establishment** method: [

- *FFC Schemes using “safe-prime” groups that meet the following: ‘NIST Special Publication 800-56A Revision 3, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” and [groups listed in RFC 3526].*

] that meets the following: [assignment: list of standards].

5.2.2.3 FCS_CKM.4 Cryptographic Key Destruction

FCS_CKM.4.1

The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method

- *For plaintext keys in volatile storage, the destruction shall be executed by a [single overwrite consisting of [zeroes]];*
- *For plaintext keys in non-volatile storage, the destruction shall be executed by the invocation of an interface provided by a part of the TSF that [*
 - *logically addresses the storage location of the key and performs a [3-pass overwrite consisting of [zeroes, ones]];*

that meets the following: *No Standard*

5.2.2.4 FCS_COP.1/DataEncryption Cryptographic Operations (AES Data Encryption/Decryption)

FCS_COP.1.1/DataEncryption

The TSF shall perform *encryption/decryption* in accordance with a specified cryptographic algorithm AES used in [CBC, CTR, GCM] mode and cryptographic key sizes [128 bits, 192 bits, 256 bits] that meet the following: AES as specified in ISO 18033-3, [CBC as specified in ISO 10116, CTR as specified in ISO 10116, GCM as specified in ISO 19772].

5.2.2.5 FCS_COP.1/SigGen Cryptographic Operation (Signature Generation and Verification)

FCS_COP.1.1/SigGen

The TSF shall perform *cryptographic signature services (generation and verification)* in accordance with a specified cryptographic algorithm [

- *RSA Digital Signature Algorithm and cryptographic key sizes (modulus) [2048 bits or greater*

]

that meet the following: [

- *For RSA schemes: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 5.5, using PKCS #1 v2.1 Signature Schemes RSASSA-PSS and/or RSASSA-PKCS1v1_5; ISO/IEC 9796-2, Digital signature scheme 2 or Digital Signature scheme 3,*

].

5.2.2.6 FCS_COP.1/Hash Cryptographic Operations (Hash Algorithm)

FCS_COP.1.1/Hash

The TSF shall perform *cryptographic hashing services* in accordance with a specified cryptographic algorithm [*SHA-1, SHA-256, SHA-384, SHA-512*] and **message digest sizes [160, 256, 384, 512] bits** that meet the following: *ISO/IEC 10118-3:2004*.

5.2.2.7 FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)

FCS_COP.1.1/KeyedHash

The TSF shall perform *keyed-hash message authentication* in accordance with a specified cryptographic algorithm [*HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, HMAC-SHA-512*] and cryptographic key sizes [*160, 256, 384, 512 bits*] and **message digest sizes [160, 256, 384, 512] bits** that meet the following: *ISO/IEC 9797-2:2011, Section 7 “MAC Algorithm 2”*.

5.2.2.8 FCS_HTTPS_EXT.1 HTTPS Protocol

FCS_HTTPS_EXT.1.1

The TSF shall implement the HTTPS protocol that complies with RFC 2818.

FCS_HTTPS_EXT.1.2

The TSF shall implement the HTTPS protocol using TLS.

FCS_HTTPS_EXT.1.3

If a peer certificate is presented, the TSF shall [*not establish the connection*] if the peer certificate is deemed invalid.

5.2.2.9 FCS_SSHC_EXT.1 SSH Client Protocol

FCS_SSHC_EXT.1.1

The TSF shall implement the SSH protocol in accordance with: RFCs 4251, 4252, 4253, 4254, [4256, 4344, 6668, 8332].

FCS_SSHC_EXT.1.2

The TSF shall ensure that the SSH protocol implementation supports the following authentication methods as described in RFC 4252: public key-based, [*password-based*].

FCS_SSHC_EXT.1.3

The TSF shall ensure that, as described in RFC 4253, packets greater than [262144] bytes in an SSH transport connection are dropped.

FCS_SSHC_EXT.1.4

The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [aes128-ctr, aes256-ctr].

FCS_SSHC_EXT.1.5

The TSF shall ensure that the SSH public-key based authentication implementation uses [ssh-rsa, rsa-sha2-256, rsa-sha2-512] as its public key algorithm(s) and rejects all other public key algorithms.

FCS_SSHC_EXT.1.6

The TSF shall ensure that the SSH transport implementation uses [hmac-sha2-256, hmac-sha2-512] as its data integrity MAC algorithm(s) and rejects all other MAC algorithm(s).

FCS_SSHC_EXT.1.7

The TSF shall ensure that [diffie-hellman-group14-sha256] and [no other methods] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHC_EXT.1.8

The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached, a rekey needs to be performed.

FCS_SSHC_EXT.1.9

The TSF shall ensure that the SSH client authenticates the identity of the SSH server using a local database associating each host name with its corresponding public key and [no other methods] as described in RFC 4251 section 4.1.

5.2.2.10 FCS_SSHS_EXT.1 SSH Server Protocol

FCS_SSHS_EXT.1.1

The TSF shall implement the SSH protocol in accordance with: RFCs 4251, 4252, 4253, 4254, [4256, 4344, 6668, 8332].

FCS_SSHS_EXT.1.2

The TSF shall ensure that the SSH protocol implementation supports the following authentication methods as described in RFC 4252: public key-based, [password-based].

FCS_SSHS_EXT.1.3

The TSF shall ensure that, as described in RFC 4253, packets greater than [262144] bytes in an SSH transport connection are dropped.

FCS_SSHS_EXT.1.4

The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [aes128-ctr, aes256-ctr].

FCS_SSHS_EXT.1.5

The TSF shall ensure that the SSH public-key based authentication implementation uses [ssh-rsa] as its public key algorithm(s) and rejects all other public key algorithms.

FCS_SSHS_EXT.1.6

The TSF shall ensure that the SSH transport implementation uses [*hmac-sha2-256, hmac-sha2-512*] as its MAC algorithm(s) and rejects all other MAC algorithm(s).

FCS_SSHS_EXT.1.7

The TSF shall ensure that [*diffie-hellman-group14-sha256*] and [*no other methods*] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHS_EXT.1.8

The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached, a rekey needs to be performed.

5.2.2.11 FCS_TLSC_EXT.1 TLS Client Protocol without Mutual Authentication

FCS_TLSC_EXT.1.1

The TSF shall implement [*TLS 1.2 (RFC 5246)*] and reject all other TLS and SSL versions. The TLS implementation will support the following ciphersuites:

[

- *TLS_DHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC3268*
- *TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 as defined in RFC 5246*
- *TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 as defined in RFC5288*

] and no other ciphersuites.

FCS_TLSC_EXT.1.2

The TSF shall verify that the presented identifier matches [*the reference identifier per RFC 6125 section 6, IPv4 address in CN or SAN, IPv4 address in SAN*].

FCS_TLSC_EXT.1.3

When establishing a trusted channel, by default the TSF shall not establish a trusted channel if the server certificate is invalid. The TSF shall also [

- *Not implement any administrator override mechanism*].

FCS_TLSC_EXT.1.4

The TSF shall [*not present the Supported Elliptic Curves/Supported Groups Extension and no other curves/groups*] in the Client Hello

5.2.2.12 FCS_TLSC_EXT.2 TLS Client Support for Mutual Authentication

FCS_TLSC_EXT.2.1

The TSF shall support TLS communication with mutual authentication using X.509v3 certificates.

5.2.2.13 FCS_TLSS_EXT.1 TLS Sever Protocol Without Mutual Authentication

FCS_TLSS_EXT.1.1

The TSF shall implement [*TLS 1.2 (RFC 5246)*] and reject all other TLS and SSL versions. The TLS implementation will support the following ciphersuites:

[

- *TLS_DHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC3268*
- *TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 as defined in RFC 5246*
- *TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 as defined in RFC5288*

] and no other ciphersuites.

FCS_TLSS_EXT.1.2

The TSF shall deny connections from clients requesting SSL 2.0, SSL 3.0, TLS 1.0 and [TLS 1.1].

FCS_TLSS_EXT.1.3

The TSF shall perform key establishment for TLS using [Diffie-Hellman parameters with size [2048 bits] and [no other groups]].

FCS_TLSS_EXT.1.4

The TSF shall support [session resumption based on session tickets according to RFC 5077].

5.2.2.14 FCS_RBG_EXT.1 Random Bit Generation

FCS_RBG_EXT.1.1

The TSF shall perform all deterministic random bit generation services in accordance with ISO/IEC 18031:2011 using [Hash_DRBG (any), CTR_DRBG (AES)].

FCS_RBG_EXT.1.2

The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [[9] software-based noise source] with a minimum of [256 bits] of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 "Security Strength Table for Hash Functions", of the keys and hashes that it will generate.

5.2.3 Identification and Authentication (FIA)

5.2.3.1 FIA_AFL.1 Authentication Failure Management

FIA_AFL.1.1

The TSF shall detect when an Administrator configurable positive integer within [1 to 20] unsuccessful authentication attempts occur related to *Administrators attempting to authenticate remotely using a password*.

FIA_AFL.1.2

When the defined number of unsuccessful authentication attempts has been met, the TSF shall [prevent the offending Administrator from successfully establishing a remote session using any authentication method that involves a password until [invoking an account unlocking command] is taken by an Administrator; prevent the offending Administrator from successfully establishing a remote session using any authentication method that involves a password until an Administrator defined time period has elapsed].³

5.2.3.2 FIA_PMG_EXT.1 Password Management

FIA_PMG_EXT.1.1

The TSF shall provide the following password management capabilities for administrative passwords:

- a) Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special characters: [!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", ["+"]]
- b) Minimum password length shall be configurable to between [15] and [100] characters.

³ Account unlocking by an Administrator is supported by both CLI and web GUI interfaces; whereas Administrator defined time-based account unlocking is only supported by web GUI interface.

5.2.3.3 FIA_UIA_EXT.1 User Identification and Authentication

FIA_UIA_EXT.1.1

The TSF shall allow the following actions prior to requiring the non-TOE entity to initiate the identification and authentication process:

- Display the warning banner in accordance with FTA_TAB.1;
- [Forgot Username/Password feature, root level log messages].

FIA_UIA_EXT.1.2

The TSF shall require each administrative user to be successfully identified and authenticated before allowing any other TSF-mediated actions on behalf of that administrative user.

5.2.3.4 FIA_UAU_EXT.2 Password-based Authentication Mechanism

FIA_UAU_EXT.2.1

The TSF shall provide a local [*password-based*] authentication mechanism to perform local administrative user authentication.

5.2.3.5 FIA_UAU.7.1 Protected Authentication Feedback

FIA_UAU.7.1

The TSF shall provide only *obscured feedback* to the administrative user while the authentication is in progress **at the local console**.

5.2.3.6 FIA_X509_EXT.1/Rev X.509 Certificate Validation

FIA_X509_EXT.1.1/Rev

The TSF shall validate certificates in accordance with the following rules:

- RFC 5280 certificate validation and certification path validation **supporting a minimum path length of three certificates**.
- The certification path must terminate with a trusted CA certificate designated as a trust anchor.
- The TSF shall validate a certification path by ensuring that all CA certificates in the certification path contain the basicConstraints extension with the CA flag set to TRUE.
- The TSF shall validate the revocation status of the certificate using [*a Certificate Revocation List (CRL) as specified in RFC 5280 Section 6.3*].
- The TSF shall validate the extendedKeyUsage field according to the following rules:
 - *Certificates used for trusted updates and executable code integrity verification shall have the Code Signing purpose (id-kp 3 with OID 1.3.6.1.5.5.7.3.3) in the extendedKeyUsage field.*
 - *Server certificates presented for TLS shall have the Server Authentication purpose (id-kp 1 with OID 1.3.6.1.5.5.7.3.1) in the extendedKeyUsage field.*
 - *Client certificates presented for TLS shall have the Client Authentication purpose (id-kp 2 with OID 1.3.6.1.5.5.7.3.2) in the extendedKeyUsage field.*
 - *OCSP certificates presented for OCSP responses shall have the OCSP Signing purpose (id-kp 9 with OID 1.3.6.1.5.5.7.3.9) in the extendedKeyUsage field.*

FIA_X509_EXT.1.2/Rev

The TSF shall only treat a certificate as a CA certificate if the basicConstraints extension is present and the CA flag is set to TRUE.

5.2.3.7 FIA_X509_EXT.2 X.509 Certificate Authentication

FIA_X509_EXT.2.1

The TSF shall use X.509v3 certificates as defined by RFC 5280 to support authentication for [HTTPS, TLS] and [no additional uses].

FIA_X509_EXT.2.2

When the TSF cannot establish a connection to determine the validity of a certificate, the TSF shall [not accept the certificate].

5.2.3.8 FIA_X509_EXT.3 X.509 Certificate Requests

FIA_X509_EXT.3.1

The TSF shall generate a Certificate Request as specified by RFC 2986 and be able to provide the following information in the request: public key and [Common Name, Organization, Organizational Unit, Country].

FIA_X509_EXT.3.2

The TSF shall validate the chain of certificates from the Root CA upon receiving the CA Certificate Response.

5.2.4 Security Management (FMT)

5.2.4.1 FMT_MOF.1/ManualUpdate Management of Security Functions Behavior

FMT_MOF.1.1/ManualUpdate

The TSF shall restrict the ability to enable the functions to perform manual updates to Security Administrators.

5.2.4.2 FMT_MTD.1/CoreData Management of TSF Data

FMT_MTD.1.1/CoreData

The TSF shall restrict the ability to manage the TSF data to Security Administrators.

5.2.4.3 FMT_MTD.1/CryptoKeys Management of TSF Data

FMT_MTD.1.1/CryptoKeys

The TSF shall restrict the ability to manage the cryptographic keys to Security Administrators.

5.2.4.4 FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1

The TSF shall be capable of performing the following management functions:

- Ability to administer the TOE locally and remotely;
- Ability to configure the access banner;
- Ability to configure the session inactivity time before session termination or locking;
- Ability to update the TOE, and to verify the updates using [hash comparison] capability prior to installing those updates;
- Ability to configure the authentication failure parameters for FIA_AFL.1;
- [
 - Ability to manage the cryptographic keys;
 - Ability to configure the cryptographic functionality;
 - Ability to configure thresholds for SSH rekeying;

- Ability to re-enable an Administrator account;
- Ability to set the time which is used for time-stamps;
- Ability to configure the reference identifier for the peer;
- Ability to import X.509v3 certificates to the TOE's trust store;
-].

5.2.4.5 FMT_SMR.2 Restrictions on Security Roles

FMT_SMR.2.1

The TSF shall maintain the roles:

- Security Administrator

FMT_SMR.2.2

The TSF shall be able to associate users with roles.

FMT_SMR.2.3

The TSF shall ensure that the conditions

- The Security Administrator role shall be able to administer the TOE locally;
- The Security Administrator role shall be able to administer the TOE remotely

are satisfied.

5.2.5 Protection of the TSF (FPT)

5.2.5.1 FPT_SKP_EXT.1 Protection of TSF Data (for reading of all pre-shared, symmetric, and private keys)

FPT_SKP_EXT.1.1

The TSF shall prevent reading of all pre-shared keys symmetric keys, and private keys.

5.2.5.2 FPT_APW_EXT.1 Protection of Administrator Passwords

FPT_APW_EXT.1.1

The TSF shall store administrative passwords in non-plaintext form.

FPT_APW_EXT.1.2

The TSF shall prevent the reading of plaintext administrative passwords.

5.2.5.3 FPT_TST_EXT.1 TSF Testing

FPT_TST_EXT.1.1

The TSF shall run a suite of the following self-tests [*during initial start-up (on power on)*] to demonstrate the correct operation of the TSF: [*Integrity, Pairwise Consistency, and Known Answer Tests*];.

5.2.5.4 FPT_STM_EXT.1 Reliable Time Stamps

FPT_STM_EXT.1.1

The TSF shall be able to provide reliable time stamps for its own use.

FPT_STM_EXT.1.2

The TSF shall [*allow the Security Administrator to set the time*].

5.2.5.5 FPT_TUD_EXT.1 Trusted Update

FPT_TUD_EXT.1.1

The TSF shall provide *Security Administrators* the ability to query the currently executing version of the TOE firmware/software and [*no other TOE firmware/software version*].

FPT_TUD_EXT.1.2

The TSF shall provide *Security Administrators* the ability to manually initiate updates to TOE firmware/software and [*no other update mechanism*].

FPT_TUD_EXT.1.3

The TSF shall provide means to authenticate firmware/software updates to the TOE using a [*published hash*] prior to installing those updates.

5.2.6 TOE Access (FTA)

5.2.6.1 FTA_SSL.3 TSF-initiated Termination

FTA_SSL.3.1

The TSF shall terminate a **remote** interactive session after a *Security Administrator-configurable time interval of session inactivity*.

5.2.6.2 FTA_SSL.4 User-initiated Termination

FTA_SSL.4.1

The TSF shall allow **Administrator**-initiated termination of the **Administrator's** own interactive session.

5.2.6.3 FTA_SSL_EXT.1 TSF-initiated Session Locking

FTA_SSL_EXT.1.1

The TSF Shall, for local interactive sessions, [*terminate the session*]

- *terminate the session*]

after a Security Administrator-specified time period of inactivity

5.2.6.4 FTA_TAB.1 Default TOE Access Banners

FTA_TAB.1.1

Before establishing an **administrative user** session the TSF shall display a **Security Administrator-specified** advisory **notice and consent** warning message regarding use of the TOE.

5.2.7 Trusted Path/Channels (FTP)

5.2.7.1 FTP_ITC.1 Inter-TSF Trusted Channel

FTP_ITC.1.1

The TSF shall be **capable of using [SSH, TLS, HTTPS]** to provide a trusted communication channel between itself and **authorized IT entities supporting the following capabilities: audit server, [NIKSUN appliances, authentication server, SSH (SCP) sever, SMTP server]** that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from **disclosure and detection of modification of the channel data**.

FTP_ITC.1.2

The TSF shall permit **the TSF or the authorized IT entities** to initiate communication via the trusted channel.

FTP_ITC.1.3

The TSF shall initiate communication via the trusted channel for *[audit transfer, authentication requests, software image updates, policy updates, network event data (metadata), Forgot Username/Password email]*.

5.2.7.2 FTP_TRP.1/Admin Trusted Path

FTP_TRP.1.1/Admin

The TSF shall **be capable of using [SSH, TLS, HTTPS]** to provide a communication path between itself and **authorized remote Administrators** that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from **disclosure and provides detection of modification of the channel data**.

FTP_TRP.1.2/Admin

The TSF shall permit remote Administrators to initiate communication via the trusted path.

FTP_TRP.1.3/Admin

The TSF shall require the use of the trusted path for initial Administrator authentication and all remote administration actions.

5.3 TOE SFR Dependencies Rationale for SFRs

The PP and any relevant EPs/Modules/Packages contain(s) all the requirements claimed in this ST. As such, the dependencies are not applicable since the PP has been approved.

5.4 Security Assurance Requirements

The TOE assurance requirements for this ST are taken directly from the PP and any relevant EPs/Modules/Packages, which is/are derived from Common Criteria Version 3.1, Revision 5. The assurance requirements are summarized in the Table 11.

Table 11 – Security Assurance Requirements

Assurance Class	Assurance Components	Component Description
Security Target	ASE_CCL.1	Conformance claims
	ASE_ECD.1	Extended components definition
	ASE_INT.1	ST introduction
	ASE_OBJ.1	Security objectives for the operational environment
	ASE_REQ.1	Stated security requirements
	ASE_SPD.1	Security problem definition
	ASE_TSS.1	TOE Summary Specification
Development	ADV_FSP.1	Basic functional specification
Guidance Documents	AGD_OPE.1	Operational user guidance
	AGD_PRE.1	Preparative user guidance
Life Cycle Support	ALC_CMC.1	Labelling of the TOE
	ALC_CMS.1	TOE CM coverage
Tests	ATE_IND.1	Independent testing – conformance
Vulnerability Assessment	AVA_VAN.1	Vulnerability survey

5.5 Assurance Measures

The TOE satisfied the identified assurance requirements. This section identifies the Assurance Measures applied by NIKSUN to satisfy the assurance requirements. The following table lists the details.

Table 12 TOE Security Assurance Measures

SAR Component	How the SAR will be met
ADV_FSP.1	The functional specification describes the external interfaces of the TOE; such as the means for a user to invoke a service and the corresponding response of those services. The description includes the interface(s) that enforces a security functional requirement, the interface(s) that supports the enforcement of a security functional requirement, and the interface(s) that does not enforce any security functional requirements. The interfaces are described in terms of their purpose (general goal of the interface), method of use (how the interface is to be used), parameters (explicit inputs to and outputs from an interface that control the behavior of that interface), parameter descriptions (tells what the parameter is in some meaningful way), and error messages (identifies the condition that generated it, what the message is, and the meaning of any error codes).
AGD_OPE.1	The Administrative Guide provides the descriptions of the processes and procedures of how the administrative users of the TOE can securely administer the TOE using the interfaces that provide the features and functions detailed in the guidance.
AGD_PRE.1	The Installation Guide describes the installation, generation, and startup procedures so that the users of the TOE can put the components of the TOE in the evaluated configuration.
ALC_CMC.1 ALC_CMS.1	The Configuration Management (CM) documents describe how the consumer identifies the evaluated TOE. The CM documents identify the configuration items, how those configuration items are uniquely identified, and the adequacy of the procedures that are used to control and track changes that are made to the TOE. This includes details on what changes are tracked and how potential changes are incorporated.
ATE_IND.1	Vendor will provide the TOE for testing
AVA_VAN.1	Vendor will provide the TOE for testing Vendor will provide a document identifying the list of software and hardware components.

6 TOE Summary Specifications

This chapter identifies and describes how the Security Functional Requirements identifies above are met by the TOE.

Table 13 – TOE Summary Specification SFR Description

Requirement	TSS Description
FAU_GEN.1	<p>The TOE contains mechanisms which generate audit data based upon successful and unsuccessful management actions by all authorized users of the TOE. The startup and shutdown of the TOE’s audit functionality is synonymous with the startup and shutdown of the TOE, which is recorded in the TOE’s audit records. In the evaluated configuration, the audit functions of the TOE cannot be turned on or off except for TOE reboot. Each audit record contains identifying information including the date and time the event occurred, the type of event, the subject identity of the event, and the outcome of the event. The audit records are generated and stored in the form of syslog records which are sent securely to the Syslog Server protected by TLS. VAR logs that are generated from applications are also transferred via TLS to the Syslog Server for remote storage. Users with the appropriate permissions can view audit log files, however, only Administrator users can delete audit log files. If an Admin deletes a log file, an audit record of that action is also recorded. All actions performed on the TOE are logged. These include the following auditable events defined in Table 10:</p> <ul style="list-style-type: none"> • Failure to establish a TLS session • Establishment/termination of a TLS session • Failure to establish an SSH session • Establishment/Termination of an SSH session • Failure to establish an HTTPS session • Establishment/Termination of an HTTPS session • All uses of the identification mechanism • All uses of the authentication mechanism • Changes to the time • Initiation of updates • Any attempts at unlocking of an interactive session • The termination of a remote session by the session locking mechanism. • The termination of an interactive session • Initiation of the trusted channel • Termination of the trusted channel • Failure of the trusted channel functions • All management activities of the TSF • Modification of the behavior of the TSF • Modification, deletion, generation/import of cryptographic keys • Starting and stopping of services <p>Modification of the behavior of the audit functionality when Local Audit Storage Space is full Audit records are created when the administrator performs each of the management functions listed above via the web GUI and the CLI (local and remote). Each audit record provides a timestamp, username and a description of the action performed including a</p>

Requirement	TSS Description
	<p>success/failure indication. The web GUI also provides the IP address from where the administrator is managing the TOE.</p> <p>In order to identify the key being operated on, the following details are recorded for all administrative actions relating to cryptographic keys (generating, importing, changing and deleting keys):</p> <ul style="list-style-type: none"> • HTTPS/TLS – certificate id will be recorded when generating or deleting a key pair • TLS/SSH session keys– key reference provided by process id • SSH key configured for SSH public key authentication –the hash of the public key that is to be used for authentication is recorded in syslog
FAU_GEN.2	<p>The TOE records the identity of the user (e.g. username, system name, IP address) associated with each audited event in the audit record. The following are examples: Username=admin, System name= Process crond (Cron Daemon), IP address= 10.115.0.108.</p>
FAU_STG_EXT.1	<p>The TOE keeps audit records for all auditable events related to the web GUI and CLI management actions. These audit records are stored locally in the /var/log directory. When the current log file reaches its allowed maximum size, it is closed and renamed sequentially (e.g., log.1, log.2, etc.) and a new log file is opened as the current log. Once the local log file reaches configured limit, the oldest file is deleted to provide space for the new files. In addition, many applications run from the CLI keep their own VAR log files, such as Apache, LDAP client, etc. Both sets of logs are automatically transferred remotely to a Syslog Server over a mutually authenticated TLS channel in realtime.</p> <p>The maximum size of each log file, the manner of rotation (deletes the oldest log file), and the maximum number of log files for each log file type are all configurable via the CLI by the VCR user. These configurations are managed through log4j (java), newsyslog (NIKOS), and syslog-ng (Syslog).</p> <p>The TOE will automatically manage audit files in two cases: if the individual log file type has exhausted its allotted space, or when the entire storage space for the TOE is consumed. If the storage space allocated for an individual file type is filled the TOE will overwrite the oldest log file of that type. If the entire 2GBs allocated to /var/log is exhausted the web GUI ceases to function and the TOE will drop all new audit data. The CLI is still accessible so that the VCR user can manually delete audit records. When storage space is freed by deleting the audit records, the web GUI will become operational and the TOE will resume auditing.</p> <p>The VCR user is the only user that has access to the CLI and as a Security Administrator is expected to operate as a trusted administrator. Thus, all audit records stored on the TOE are protected by the TOE’s authentication mechanisms for the VCR user and the VCR user is not expected to modify or delete the audit records for malicious purposes.</p>

Requirement	TSS Description
FCS_CKM.1	<p>The TOE implements a FIPS PUB 186-4 conformant key generation mechanism for RSA key generation schemes for establishing TLS connections. Specifically, the TOE complies with the FIPS 186-4 (Digital Signature Standard (DSS) Appendix B.3). This is used to generate the RSA key pairs with a modulus of at least 2048 bits which has an equivalent key strength of 112 bits. In addition, the TOE implements FFC schemes using safe primes that meets NIST SP 800-56A Revision 3 conformant key establishment mechanism for Diffie-Hellman key establishment schemes for SSH. This is used to generate the keys of size 2048 bits for diffie-hellman-group14-sha256.</p> <p>The TOE's key generation functions have the following ACVP certificates: RSA: # A1975, A1976 DSA: # A1975, A1976</p>
FCS_CKM.2	<p>The TOE implements a NIST SP 800-56A conformant key establishment mechanism for Diffie-Hellman key establishment schemes. Specifically, the TOE <i>FFC Schemes using 'safe-prime' groups</i>. The TSF uses Diffie-Hellman-group14-SHA256 in accordance with RFC 3526, Section 3.</p>
FCS_CKM.4	<p>The Diffie-Hellman Shared Secret, Diffie Hellman private exponent, and SSH session key are stored in volatile memory (RAM). These keys are destroyed by a single direct overwrite consisting of zeroes. These keys are zeroized immediately after they are no longer needed and when the TOE is shut down as well as when power is lost. The SSH private key and SSL server key are stored on the local filesystem and RAM. When stored in RAM, the keys will be zeroized as described above. When new keys are generated, the TOE overwrites the location where the keys are stored with three overwrite passes with the byte pattern of 0xff (i.e. ones), followed by 0x00 (i.e. zeroes), and followed by 0xff (i.e. ones) again. None of the keys are stored in encrypted form. All keys are stored in plaintext in RAM or local filesystem.</p>
FCS_COP.1/DataEncryption	<p>The TOE performs encryption and decryption using the AES algorithm in CBC, CTR, and GCM mode with key sizes of 128, 192 and 256 bits. This algorithm has ACVP AES certificates # A1975, A1976. The AES algorithm meets ISO 18033-3 and CBC meets ISO 10116, <i>CTR as specified in ISO 10116, GCM as specified in ISO 19772</i>.</p>
FCS_COP.1/SigGen	<p>The TOE performs cryptographic digital signature verification and generation in accordance with FIPS PUB 186-4: RSA Digital Signature Algorithm (rDSA) with a key size (modulus) of 2048 bits or greater.</p> <p>The algorithm has ACVP RSA certificate # A1975, A1976. Note that FIPS 186-4 supersedes FIPS 186-3.</p>
FCS_COP.1/Hash	<p>The TOE provides cryptographic hashing services using SHA-1, SHA-256, SHA-384 and SHA-512 with message digest sizes of 160, 256, 384, and 512 bits respectively, as specified in FIPS PUB 180-4. The TSF also uses SHA-1, SHA-256, SHA-384, and SHA-512 for HMAC for message authentication, health tests, TLS certificate authentication and SSH. SHA-256 and SHA-512 are used in RSA for Signature Generation and Signature Verification. The SHA algorithm meets ISO/IEC 10118-3:2004 and has ACVP SHS certificates A1975, A1976.</p>
FCS_COP.1/KeyedHash	<p>The TOE provides keyed-hashing message authentication services using HMAC-SHA-1, HMAC-SHA- 256, HMAC-SHA-384, and HMAC-SHA-512 with</p>

Requirement	TSS Description
	<p>key sizes 160, 256, 384, 512 bits and digest sizes of 160, 256, 384, and 512 bits as specified in FIPS PUB 198-1 and FIPS PUB 180-4. The algorithm meets ISO/IEC 9797-2:2011 and has CAVP HMAC certificates A1975, A1976.</p>
<p>FCS_HTTPS_EXT.1</p>	<p>The TOE invokes HTTPS in compliance with RFC 2818 to provide a secure interactive management interface via the web GUI. If the certificate from the TOE is invalid, the browser will inform the user and let them decide whether to proceed with the connection. HTTPS is also used to facilitate a secure exchange of information and status reports between the NikSun appliances. The NetOmni will initiate the connection and it will only be established if the peer certificate provided by the NetDetector/NetVCR/LogWave to the NetOmni is valid. A 2048 bit RSA peer certificate is used by the HTTPS/TLS protocol.</p> <p>HTTPS uses TLSv1.2 (as specified by FCS_TLSC_EXT.1 for the connecting to NIKSUN appliances and FCS_TLSS_EXT.1 for the web GUI) to securely establish the AES encrypted session which uses the TLS_DHE_RSA_WITH_AES_256_CBC_SHA, TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 or TLS_DHE_RSA_WITH_AES_256_GCM_SHA_384 cipher suite. Port 443 is used for initial HTTPS connections in accordance with RFC 2818.</p>
<p>FCS_SSHC_EXT.1</p>	<p>The TOE acts as an SSH Client when SCP is used to transfer the software image updates to the TOE.</p> <p>SSH functionality is compliant with RFCs 4251, 4252, 4253, 4254, 4256, 4344, 6668 and 8332. The TOE supports password-based and public key-based authentication using an RSA key of 2048 bits in length as described in RFC 4252, using ssh-rsa, rsa-sha2-256, rsa-sha2-512 as its public key authentication algorithm. Encryption is provided by aes128-ctr and aes256-ctr, with data integrity MAC algorithms hmac-sha2-256 and hmac-sha2-512, and diffie-hellman-group14-sha256 as its key exchange algorithm. The SSH connection will drop any connection when a packet greater than 262144 bytes is detected, in accordance with RFC 4253. The SSH connection will rekey before 1 hour has elapsed or 1 GB of data has been transmitted using that key, whichever occurs first.</p>
<p>FCS_SSHS_EXT.1</p>	<p>The TOE acts as an SSH server for remote CLI management.</p> <p>SSH functionality is compliant with RFCs 4251, 4252, 4253, 4254, 4256, 4344, 6668 and 8332. The TOE supports password-based and public key-based authentication using an RSA key of 2048 bits in length as described in RFC 4252, using ssh-rsa as its public key authentication algorithm. Encryption is provided by aes128-ctr and aes256-ctr, with data integrity MAC algorithms hmac-sha2-256 and hmac-sha2-512, and diffie-hellman-group14-sha256 as its key exchange algorithm. The SSH connection will drop any connection when a packet greater than 262144 bytes is detected, in accordance with RFC 4253. The SSH connection will rekey before 1 hour has elapsed or 1 GB of data has been transmitted using that key, whichever occurs first.</p>
<p>FCS_TLSC_EXT.1, FCS_TLSC_EXT.2</p>	<p>The TOE uses the TLSv1.2 protocol with mutual and without mutual authentication and TLS_DHE_RSA_WITH_AES_256_CBC_SHA,</p>

Requirement	TSS Description
	<p>TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 or TLS_DHE_RSA_WITH_AES_256_GCM_SHA_384 ciphersuite to secure the channel for the following purposes with these servers in the operational environment:</p> <ul style="list-style-type: none"> • sending of audit data to the Syslog Server, • performing authentication requests with the LDAP/AD Server, • sending “Forgot Username/Password” emails to an SMTP Server, and • NIKSUN appliance in the environment (NetOmni appliance sending policy updates to and receiving network event data (metadata) from a NetDetector/NetVCR/LogWave appliance). <p>The TLS connection to the Syslog server is over mutually authenticated TLS channel; all other TLS connections are without mutual authentication. Configuring these channels requires the Security Administrator to define the reference identifier of the operational environment servers to which the TOE will connect. The TOE supports the reference identifiers as per RFC 6125 Section 6, IPv4 address in CN or SAN. The TOE supports wildcards. The TOE uses X.509v3 certificates to support mutual authentication for the communication with the syslog server. As part of the TLS session establishment, the TOE will provide its client certificate and validate the 2048-bit certificate received from the operational environment server and will only establish the connection if the certificate is valid. The TOE will verify the identity of the Syslog Server, LDAP/AD Server, SMTP Server, and NIKSUN appliance in accordance with RFC 6125 by checking that the presented identifier from the certificate, which includes the Common Name and DNS Name (Subject Alternative Name), matches the reference identifier (i.e. DNS hostname) defined on the TOE. The TOE also supports IPv4 addresses in CN or SAN. For IP addresses in the CN as reference identifiers, the text representation of the IP address in the CN is converted to a binary representation of the IP address in network byte order separating the pattern at the ‘dot’. The TOE does not enforce canonical format. The TOE does not support certificate pinning or Elliptic Curves.</p> <p>The communication between the TOE and another NIKSUN appliance is a non-mutually authenticated TLS channel. The TOE can act as a TLS Client while communicating with another NIKSUN appliance. NetOmni appliance sends policy updates to and receives network event data (metadata) from a NetDetector/NetVCR/LogWave appliance. Therefore, when the TOE is configured as NetOmni, it acts as a TLS Client while sending policy updates to NIKSUN appliance and when the TOE is configured as NetDetector/NetVCR/LogWave, it acts as a TLS Client while sending network event data (metadata) to NIKSUN appliance.</p>

Requirement	TSS Description
FCS_TLSS_EXT.1	<p>Remote user administration via the web GUI is protected using HTTPS/TLS. The TOE uses the TLSv1.2 protocol and TLS_DHE_RSA_WITH_AES_256_CBC_SHA, TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 or TLS_DHE_RSA_WITH_AES_256_GCM_SHA_384 ciphersuite to secure the web GUI path to the TOE.</p> <p>The communication between the TOE and another NIKSUN appliance is a non-mutually authenticated TLS channel. The TOE can act as a TLS Server while communicating with another NIKSUN appliance.</p> <p>NetOmni appliance sends policy updates to and receives network event data (metadata) from a NetDetector/NetVCR/LogWave appliance.</p> <p>Therefore, when the TOE is configured as NetDetector/NetVCR/LogWave, it acts as a TLS Server while receiving policy updates from NIKSUN appliance and when the TOE is configured as NetOmni, it acts as a TLS Server while receiving network event data (metadata) from NIKSUN appliance.</p> <p>The TSF denies all connections from clients requesting connections dependent on the following SSL 2.0, SSL 3.0, TLS 1.0, and TLS 1.1 protocols and any other ciphersuite. The TSF uses keys that are established using 2048-bit Diffie-Hellman parameters.</p> <p>The TOE supports session resumption based on session tickets according to RFC 5077.</p>
FCS_RBG_EXT.1	<p>The TOE performs random bit generation services in accordance with ISO/IEC 18031:2011 by Hash_DRBG (ACVP certs # A1975) and CTR_DRBG (AES) (ACVP certs # A1976). The TOE is seeded with at least 256 bits of entropy from /dev/random which is seeded with unconditioned random data from 9 software entropy sources: RANDOM_SWI, RANDOM_INTERRUPT, RANDOM_NET_NG, RANDOM_NET_ETHER, RANDOM_NET_TUN, RANDOM_MOUSE, RANDOM_KEYBOARD, RANDOM_ATTACH, and RANDOM_CACHED.</p>
FIA_AFL.1	<p>The TOE has two types of users, those that access the TOE via the CLI, and those by the web GUI. The CLI allows management of the TOE remotely and locally, while the web GUI allows only remote management. The TOE will lock out user accounts after a number of failed attempts set by the security administrator. Afterwards, the user cannot log back in until the account is unlocked by another administrator or until an administrator defined time period has elapsed. Account unlocking by an Administrator is supported by both CLI and web GUI interfaces. Administrator defined time-based account unlocking is only supported by web GUI interface. An Administrator logging in locally using root account is not subject to account lockout. The CLI and Web GUI user accounts are maintained separately by the TOE. Therefore, the TOE tracks unsuccessful authentication attempts independently between GUI and CLI users. A failure or lockout on GUI will not affect CLI attempts or users.</p>
FIA_PMG_EXT.1	<p>In the evaluated configuration the TOE supports passwords with a minimum length of 15 and 100 maximum length. The accepted characters include upper and lower case letters, numbers, and the special characters "!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", and "+". The users are divided into two separate groups by how they access the TOE, whether through an available web GUI or the CLI. For the web GUI, the</p>

Requirement	TSS Description
	<p>Administrators have the ability to set the minimum password to 15 characters in order to match the evaluated configuration. For the CLI the VCR user has the ability to set the minimum character limit for passwords to 15 characters to gain access through the CLI in the /etc/pam.d/passwd file.</p>
<p>FIA_UIA_EXT.1</p>	<p>Users can connect to the TOE via the CLI or the web GUI. The CLI can be accessed remotely through an SSH client or locally on the console. Prior to authentication, the TOE displays the banner on the CLI; which can be configured by the VCR user through the CLI. The TOE also provides the ability to view root level log messages via the console (local CLI).</p> <p>The web GUI can be accessed through a web browser and is protected by HTTPS/TLS. The preauthentication services that the TOE allows via the web GUI are displaying the warning banner and a “Forgot username/Password” feature. In the evaluated configuration, an administrator will configure the secure mode for the web GUI’s “Forgot Username/Password” feature which will enable TLS for the Mail Transfer Agent (MTA). When a user utilizes the “Forgot Username/Password” feature on the web GUI login screen, NetOmni’s MTA will send an email to the SMTP Server over a protected TLS channel. If the user forgot their username, the user can enter the email associated with the username and the TOE will send an email using SMTP to that email account. If the user has forgotten the password, the user can enter their username and the TOE will send an email using SMTP to the email address associated with that username. The email will contain a link that directs the user to the TOE’s web GUI to be able to securely change their password.</p>
<p>FIA_UAU_EXT.2</p>	<p>Users can authenticate to the TOE locally or remotely. Local users can gain access to the TOE via the console (local CLI) by authenticating to the TOE’s local authentication mechanism with their username/password combination. Remote users can gain access to the TOE by either the remote CLI or the web GUI. The remote CLI is protected by SSH and allows users to authenticate against the TOE’s local authentication mechanisms with either their username/password combination or SSH public key. SSH public key authentication can be achieved for SSH and SCP sessions with the following steps:</p> <ul style="list-style-type: none"> • ssh-keygen -t rsa – This command generates a private/ public key pair in ~/.ssh in files id_rsa and id_rsa.pub for private and public keys respectively. • Copy the public key to a remote server and append it to ~/.ssh/authorized_keys. <p>The web GUI is protected by HTTPS/TLS and allows users to authenticate with their username/password combination against the TOE’s local authentication mechanism or a remote LDAP/AD Server. When validating user’s credentials stored in the remote LDAP/AD Server, the TOE will send a verification request to the LDAP/AD Server with the user’s entered username and password and the LDAP/AD Server will respond with pass or failed authentication. If authentication passes, the validated username is used to determine the user’s assigned role in the TOE’s local user store. In the evaluated configuration, the TOE connects to a server with OpenLDAP using LDAPS protected by TLS.</p>

Requirement	TSS Description
FIA_UAU.7	<p>While authenticating to the TOE with an incorrect login (specifically an invalid username and/or an invalid password) on any interface the TOE does not indicate whether the username or password was incorrect. Also, there is no feedback while a user is entering their password via the console (local CLI), using the monitor and keyboard.</p>
<p>FIA_X509_EXT.1/Rev FIA_X509_EXT.2 FIA_X509_EXT.3</p>	<p>The TOE uses X509 certificates as part of TLS and HTTPS protocols. The TOE provides ability for an administrator to generate a CSR and upload a CA signed server certificate, which will be used by the TOE as part of Web GUI and when the TOE is connecting to a remote Syslog server over mutually authenticated TLS. The TOE also provides ability for an administrator to upload certificate chains as part of configuring remote IT entities. The TOE uses the corresponding certificate chain to validate the certificate presented by a remote IT entity as part of TLS handshake. The TOE checks the validity of a client's or server's certificate as part of TLS handshake for the following connections: when it connects with a NIKSUN appliance through HTTPS/TLS, when it connects to a Syslog Server for sending audit data over TLS, when it connects with an LDAP/AD Server for authenticating users over TLS, and when it connects to an SMTP Server to send emails over TLS.</p> <p>The TSF determines the validity of certificates by ensuring that the certificate and the certificate path is valid in accordance with RFC 5280. In addition, the certificate path must terminate in a trusted CA certificate, the basicConstraints extension is present, and the CA flag is set to TRUE for all CA certificates. The TOE will only consider a certificate as a CA certificate if both the basicConstraints extension is present and the CA flag is set to TRUE. The TSF also validates the revocation status of the certificate by using a CRL in accordance with RFC 5280 Section 6.3. Finally, the TOE ensures the extendedKeyUsage field includes the Server Authentication purpose (id-kp 1 with OID 1.3.6.1.5.5.7.3.1) for server certificates used in HTTPS/TLS and TLS.</p> <p>The TOE uses X.509v3 certificates to support authentication for TLS and HTTPS connections in accordance with RFC 5280. The TOE performs revocation check as part of TLS handshake. The TOE requests CRLs to check the revocation status of certificates provided in a certificate chain. CRLs are requested using HTTP from a CRL distribution point which resides in the operating environment. It is expected that the CRL distribution point has the same physical controls and security provided to the TOE. When the TOE cannot establish a connection to the CRL distribution point or determine the validity of a certificate, the TSF rejects the certificate.</p> <p>The TOE can create a Certificate Signing Request (CSR) as specified by RFC 2986. The request includes the following information: Public Key, Common Name, Country, Organization Name, and Organizational Unit. Once created, the CSR can be manually transferred to the CA for signature and then manually transferred back. When the TSF receives the CA Certificate Response, it will validate the chain of certificates from the Root CA upon receiving CA Certificate Response.</p>

Requirement	TSS Description
FMT_MOF.1/ManualUpdate	<p>The TOE restricts the ability to perform manual updates to the VCR user via the CLI. There are no other methods for updating the TOE.</p>
FMT_MTD.1/CoreData	<p>The TOE restricts the ability to manage the TSF data to Security Administrators. None of the administrative functions are available to non-administrative users or administrators prior to authentication.</p> <p>The TOE has several privileges which it can grant to user groups for the web GUI interface and only one user function for the CLI.</p> <p>The CLI user function, called the VCR user, provides the majority of support for and modification of the TOE security functions, and acts as one of the main Security Administrators.</p> <p>The web GUI has users, which can belong to at most one group each. Groups map to permissions that determine the actions authorized for the members of a group. The Admin user (default user account) belongs to the Administrators Group and serves as the Security Administrator. The Admin user cannot change its name and the Administrators Group cannot have its permissions changed. The Administrators can also manage TOE's trust store for managing X.509 certificates used by the Web GUI and while communicative with remote IT entities via TLS. The ability to manage the trust stores is restricted to Security Administrators.</p> <p>The only actions allowed before authentication is the use of the "forgot password" function for the web GUI, the ability to view root level log messages via the console (local CLI) and the display of the security banner for the web GUI and the CLI.</p>
FMT_MTD.1/CryptoKeys	<p>The TOE restricts the ability to manage the cryptographic keys to Security Administrators. The Security Administrator is able to manage the cryptographic keys (generating keys, importing keys, or deleting keys) that are used in TLS and SSH communications. These keys can be managed via Web GUI or CLI as part of following operations:</p> <ul style="list-style-type: none"> • HTTPS/TLS – CSR (keypair) generation, certificate import/export, Trust store management • TLS/SSH session keys– as part of session establishment and termination • SSH public key authentication – generate keypair, import/export public keys • Zeroize – delete keys
FMT_SMF.1	<p>The TOE has two types of users, those that access the TOE via the CLI, and those by the web GUI. The CLI allows management of the TOE remotely and locally, while the web GUI allows only remote management. The role of administrator for the CLI is fulfilled by the VCR, while for the web GUI it is fulfilled by the Admin Group, with the user named Admin being the original administrator. The Administrator users are capable of performing the following management functions on the TOE as defined elsewhere in this document:</p> <ul style="list-style-type: none"> • Ability to administer the TOE locally and remotely; • Ability to configure the access banner; • Ability to configure the session inactivity time before session termination or locking; • Ability to update the TOE, and to verify the updates using a published hash prior to installing those updates;

Requirement	TSS Description
	<ul style="list-style-type: none"> • Ability to configure the authentication failure parameters for FIA_AFL.1; • Ability to configure the SSH and TLS protocols, keys and connections; • Ability to configure cryptographic functionality as defined in other SFRs in this document • Ability to configure thresholds for SSH rekeying • Ability to re-enable an Administrator account • Ability to set the time which is used for time-stamps • Ability to configure the reference identifier for the peer • Ability to import X.509v3 certificates to the TOE's trust store
FMT_SMR.2	<p>There are two types of user accounts, those that access the TOE through the CLI, and those that access through the web GUI. The TOE maintains the role of Security Administrator which is fulfilled by the VCR user for the CLI and the Administrator users for the web GUI. For the CLI interface, the VCR user is the only user in the evaluated configuration. The CLI can be accessed locally through a keyboard and terminal or remotely through an SSH session. The VCR user sometimes assumes the role of root for some management activities for the TOE. All web GUI security management functions available to authorized users of the TOE are mediated by a role-based access control system. Each user has the following security attributes associated with them:</p> <p>CLI users:</p> <ul style="list-style-type: none"> • Username • Password (SHA512) • Full name (optional) • SSH public key for remote CLI login • User groups (note -- users can be in more than 1 group, including TSF management) • User home directory • User default shell • Last successful authentication time • Number of failed authentications • Status (locked or unlocked) <p>Web GUI users:</p> <ul style="list-style-type: none"> • Username • Password (SHA256) • Full name • Description (optional) • Email • Phone (optional) • User group (note -- users can only be in 1 group) • User rights (note -- ACL defined by group) • Password policy (note -- defined by group) • Status (enabled or disabled) • Last password change date • Password expiration date • Password expiration notification policy (how many days before expiration for reminders)

Requirement	TSS Description
	<ul style="list-style-type: none"> • Password age • Old passwords (SHA256 list) • First authentication failure time • Last authentication failure time • Number of failed authentications <p>The TOE will store all user data if local authentication is used, and the LDAP/AD Server will store only the authentication data in the event of LDAP enterprise authentication being used. The roles are always stored locally, and when LDAP is used the LDAP validated username is used to query these attributes. The username and password are for authenticating to the TOE.</p> <p>All security management functions for the web GUI are managed by roles (permissions) being assigned to certain groups. Authorized actions for a particular user are dependent on which group they are assigned to. A user can only be assigned to one group. There are 4 initial groups: administrator, Account Administrator, Advanced Users, and User. Groups have permissions assigned to them, which determines what actions members of a group can take. The Admin user (default user account) is a member of the Administrators Group. The Admin User cannot change their name, and the permissions of the Administrator Group cannot be changed. The Admin user can create other Administrator users, and change the permissions of other groups, however the Account Administrator group cannot create new users in the Admins Group. The web GUI can only be accessed remotely.</p>
FPT_SKP_EXT.1	<p>The Diffie-Hellman Shared Secret, Diffie Hellman private exponent, and SSH session key are stored in volatile memory (RAM) and are not accessible by any user. The SSH private key and SSL server key are stored on the local filesystem and RAM. The keys stored on the local filesystem are protected by obfuscation. Because the key data is stored in memory, core dumps are disabled to prevent this data from being disclosed if an error were to occur on the underlying operating system.</p> <p>The VCR user has the ability to delete SSH keys using the “rm <keyfile>” command.</p>
FPT_APW_EXT.1	<p>The TOE stores passwords in several different locations and secures them through different means depending on their use. The TOE stores passwords for the VCR user, web GUI users, and accounts with supportnet.niksun.com, and each registered NIKSUN appliance. The VCR user’s password is stored in the OS’s password file which has configurable hashing and in the evaluated configuration will use SHA-512. Web GUI user passwords are stored in an internal Postgres Database which is hashed using SHA-256. A password is stored for connecting to supportnet.niksun.com for downloading signature updates which are used for NetOmni’s primary functionality. The password is part of the administrators’ account for that website and is protected using AES-128 encryption. The connection between the TOE and a NIKSUN appliance requires the username/password of an admin for each device. The VCR</p>

Requirement	TSS Description
	user is able to view the locations of these passwords but can only see their hash values.
FPT_TST_EXT.1	<p>Self-tests are conducted by the TOE during initial start-up (on power-on) to ensure the firmware integrity and integrity of the cryptographic module, cryptographic functions, and the DRBG.</p> <p>During power-on the TOE perform an integrity check on all firmware packages using SHA-256. When the cryptographic module is loaded into memory, it conducts power-on self-tests to ensure its integrity and proper function. The cryptographic module verifies its own integrity using an HMAC SHA-256 digest computed at build time. If the integrity test passes, then the cryptographic module conducts the power-on self-test. These consist of algorithm-specific Pairwise Consistency and Known Answer Tests. All of the cryptographic algorithms used by the TOE are tested. The FIPS_mode_set() function performs all power-on self-tests listed above with no operator intervention required, returning a "1" if all power-on self-tests succeed, and a "0" otherwise. If any component of the power-on self-test fails an internal flag is set to prevent subsequent invocation of any cryptographic function calls.</p>
FPT_STM_EXT.1	<p>The TOE has an underlying hardware clock that is used for time keeping. The Admin can use the web GUI to set the time zone, date options, and the time format used for audit records and TOE functionality (seconds, milliseconds, microseconds, or nanoseconds). The VCR user can also configure all aspects of the clock using the local or remote CLI. The TOE uses the clock for several purposes in the time format selected including for:</p> <ul style="list-style-type: none"> • Audit records • Inactivity timeout for local CLI sessions • Inactivity timeout for remote CLI sessions • Inactivity timeout for remote web GUI sessions • X.509 certificate validation
FPT_TUD_EXT.1	<p>The TOE's software version that is currently executing is the same as the last installed software version. TOE users can find the TOE's current software version via the web GUI or the CLI. For the web GUI, the user can check the current software version in the 'About' tab. In the CLI, the command "appliance_env" returns the current executed software versions. The "applhistory" command returns the software image version history.</p> <p>The TOE software is updated by the VCR user via the CLI. When an updated software image becomes available, an administrator with a support account at supportnet.niksun.com will receive an email or the administrator can go to supportnet.niksun.com to view available software image patches. To update the TOE, the software image is downloaded to the SCP Server. The VCR user can either transfer the image onto a CD and then transfer it to the TOE, or use SCP to securely transfer the image directly to the TOE from the SCP Server.</p>

Requirement	TSS Description
	<p>When an update is performed, the TOE conducts a hash verification on the system image using SHA-256. The Security Administrator must manually confirm that the update’s hash and the published hash must match prior to installing the update. If the two hashes match the Administrator continues with the install and the TOE will restart running the latest version.</p> <p>Otherwise, if the values do not match, the VCR user will receive an error message and the install process is halted.</p>
FTA_SSL.3	<p>The TOE is designed to terminate a remote session using the web GUI or CLI after a given amount of time passes on the system clock. The CLI timeout can be configured by the VCR user in the same manner as defined in FTA_SSL_EXT.1. The web GUI timeout can be configured by the VCR user via the CLI by modifying the session_timeout variable in the “/usr/local/niksun/apps/etc/apps.conf” file.</p>
FTA_SSL.4	<p>The VCR user accessing the TOE remotely or locally through the CLI can terminate their session by entering the exit command. Users accessing the TOE remotely through the web GUI will terminate their sessions by clicking the logout button.</p>
FTA_SSL_EXT.1	<p>The TOE is designed to terminate a local session via the keyboard and monitor after a specific time period of inactivity. The CLI timeout value is configured by the VCR user via the CLI in /etc/profile TMOU value with a default of 900 (15 minutes), a minimum value of 5 minutes and a maximum value no greater than the ‘System timeout’.</p> <p>The ‘System timeout’ can be reset by the VCR user in the /usr/local/niksun/apps/etc/apps.conf file under session_timeout= 86400 (24 hours) with a maximum of 24 hours, a minimum of 5 minutes, and a default of 1 hour.</p>
FTA_TAB.1	<p>There are three possible ways to log in to the TOE: local CLI, remote CLI, and a remote web GUI. When logging in locally or remotely through the CLI, the pre-authentication banner is displayed.</p> <p>It can be configured by the VCR user via the CLI. When connecting remotely via the web GUI, a pre-authentication banner is displayed that can be configured by an Administrator through the web GUI.</p>
FTP_ITC.1	<p>The TOE connects with a Syslog Server, LDAP/AD Server, SMTP Server, SCP Server, and instances of NIKSUN appliances to send and receive data. All devices reside in the operational environment and communicate with the TOE via trusted channels. The channels are logically distinct from each other and do not interfere with the operation of the other channels of communication for other devices. When connecting to the Syslog Server to transfer audit records the records are secured with TLS. SCP using an SSH client is used to transfer the software image updates to the TOE. TLS is used to secure the connection between the TOE and an external LDAP/AD. When a user performs the “Forgot Username/Password” feature the TOE will send an email protected by TLS to an SMTP Server. HTTPS/TLS is used by the TOE, to connect to the NIKSUN appliance, to send policy updates and receive network metadata.</p> <p>The TOE initiates communication with each of the servers in the operational environment using the protocols discussed in the relevant SFRs to protect the data traversing the channel from disclosure and/or modification.</p>

Requirement	TSS Description
FTP_TRP.1/Admin	When Administrator users connect to the TOE remotely, they are required by the TOE not only to authenticate but also to use trusted paths. When using the web GUI, HTTPS/TLS is used to secure the channel, and is conformant to SFRs FCS_HTTPS_EXT.1 and FCS_TLSS_EXT.1. When connecting by the remote CLI, users must use SSH, which is conformant to FCS_SSHS_EXT.1. These protocols are used to protect the data traversing the channel from disclosure and/or modification.

6.1 CAVP Algorithm Certificate Details

Each of these cryptographic algorithms have been validated as identified in the table below.

Table 14 – CAVP Algorithm Certificate References

Algorithm	Description	Mode and Standard Supported	Certificates
RSA	Key Generation, Signature Generation/Verification	FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Appendix B.3 FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 5.5, using PKCS #1 v2.1	A1975 A1976
DRBG	Random Bit Generation	Hash and CTR as per ISO/IEC 18031:2011	A1975 A1976
HMAC	Keyed Hashing	HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, and HMAC-SHA-512 as per ISO/IEC 9797-2:2011, Section 7 “MAC Algorithm 2”.	A1975 A1976
Hash	Hashing	SHA-1, SHA-256, SHA-384, and SHA-512 as per ISO/IEC 10118-3:2004	A1975 A1976
AES	Encryption/Decryption	CBC as specified in ISO 10116, CTR as specified in ISO 10116, GCM as specified in ISO 19772	A1975 A1976

6.2 Cryptographic Key Destruction

The table below describes the key zeroization provided by the TOE and as referenced in FCS_CKM.4.

Table 15 – Four Column Table

Keys/CSPs	Purpose	Storage Location	Method of Zeroization
Diffie Hellman private exponent	DH Key	RAM	One-pass overwrite with zeroes
Diffie Hellman public exponent	DH Key	RAM	One-pass overwrite with zeroes
DH Shared Secret	DH Key	RAM	One-pass overwrite with zeroes

Keys/CSPs	Purpose	Storage Location	Method of Zeroization
SSH Private Key	RSA Private Key	ACL protected directory	One-pass overwrite with zeroes
SSH Public Key	RSA Public Key	n/a - public	Three-pass overwrite with ones and zeroes
SSL Server Key	RSA Private Key	Local filesystem	Three-pass overwrite with ones and zeroes
FW Integrity Public Key	RSA Public Key	n/a - public	Three-pass overwrite with ones and zeroes
SSH Session Key	AES Key	RAM	One-pass overwrite with zeroes
TLS Session Encryption Key	AES Key	RAM	One-pass overwrite with zeroes
TLS Session Integrity Key	HMAC Key	RAM	One-pass overwrite with zeroes

7 Acronym Table

Acronyms should be included as an Appendix in each document.

Table 16 - Acronyms

Acronym	Definition
AES	Advanced Encryption Standard
CC	Common Criteria
CRL	Certificate Revocation List
DTLS	Datagram Transport Layer Security
EP	Extended Package
GUI	Graphical User Interface
IP	Internet Protocol
NDcPP	Network Device Collaborative Protection Profile
NIAP	Nation Information Assurance Partnership
OCSP	Online Certificate Status Protocol
PP	Protection Profile
RSA	Rivest, Shamir, & Adleman
SFR	Security Functional Requirement
SSH	Secure Shell
ST	Security Target
TOE	Target of Evaluation
TLS	Transport Layer Security
TSS	TOE Summary Specification