



Security Target

Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms

Document Version 2.1

August 26, 2013

Prepared For:



Juniper Networks, Inc.

1194 North Mathilda Avenue

Sunnyvale, CA 94089

www.juniper.net

Prepared By:



Apex Assurance Group, LLC

530 Lytton Avenue, Ste. 200

Palo Alto, CA 94301

www.apexassurance.com

Abstract

This document provides the basis for an evaluation of a specific Target of Evaluation (TOE), Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms. This Security Target (ST) defines a set of assumptions about the aspects of the environment, a list of threats that the product intends to counter, a set of security objectives, a set of security requirements and the IT security functions provided by the TOE which meet the set of requirements.

Revision History

Revision	Date	Description
1.0	May 15, 2012	Initial version
1.1	June 7, 2012	Updated to meet NDPP v1.1 requirements
1.2	August 22, 2012	Updated from NDPP ST v1.0 inputs
1.3	September 18, 2012	Initial submission to Lab
1.4	October 22, 2012	Added SRX1400
1.5	December 17, 2012	Updated to address EOR
1.6	January 31, 2013	Updated to address EOR 2.0
1.7	February 24, 2013	Updated to address EOR 3.0
1.8	March 18, 2013	Formatting corrections
1.9	June 7, 2013	Updated TOE version identifier
2.0	July 29, 2013	Updated references
2.1	August 26, 2013	Updated TOE version identifier

Table of Contents

1	Introduction	6
1.1	<i>ST Reference</i>	6
1.2	<i>TOE Reference</i>	6
1.3	<i>Document Organization</i>	6
1.4	<i>Document Conventions.....</i>	7
1.5	<i>Document Terminology</i>	7
1.6	<i>TOE Overview</i>	9
1.7	<i>TOE Description</i>	10
1.7.1	<i>Overview</i>	10
1.7.2	<i>Physical Boundary</i>	11
1.7.3	<i>Logical Boundary.....</i>	12
1.7.4	<i>Summary of Out-of-Scope Items.....</i>	13
1.7.5	<i>TOE Security Functional Policies</i>	13
1.7.6	<i>TOE Product Documentation</i>	13
2	Conformance Claims	15
2.1	<i>CC Conformance Claim</i>	15
2.2	<i>Protection Profile Conformance Claim.....</i>	15
2.2.1	<i>TOE Type Consistency</i>	15
2.2.2	<i>Security Problem Definition Consistency</i>	15
2.2.3	<i>Security Objectives Consistency.....</i>	15
2.2.4	<i>Security Functional Requirements Consistency</i>	15
2.2.5	<i>Security Assurance Requirements Consistency</i>	15
2.3	<i>Package Claim</i>	15
3	Security Problem Definition	16
3.1	<i>Threats.....</i>	16
3.2	<i>Organizational Security Policies</i>	17
3.3	<i>Assumptions</i>	17
4	Security Objectives	18
4.1	<i>Security Objectives for the TOE.....</i>	18
4.2	<i>Security Objectives for the Operational Environment</i>	19
4.3	<i>Security Objectives Rationale</i>	19
5	Extended Components Definition	20
5.1	<i>Rationale for Extended Components</i>	20
6	Security Requirements.....	21
6.1	<i>Security Functional Requirements</i>	21
6.1.1	<i>Security Audit (FAU).....</i>	22
6.1.2	<i>Cryptographic Support.....</i>	24
6.1.3	<i>User Data Protection (FDP).....</i>	26
6.1.4	<i>Identification and Authentication (FIA).....</i>	26
6.1.5	<i>Security Management (FMT)</i>	27
6.1.6	<i>Protection of the TSF (FPT)</i>	28
6.1.7	<i>TOE Access</i>	29

6.1.8	Trusted Path/Channel (FTP)	29
6.1.9	Stateful Traffic Filtering (FFW)	30
6.2	<i>CC Component Hierarchies and Dependencies</i>	34
6.3	<i>Security Assurance Requirements</i>	34
6.4	<i>Security Requirements Rationale</i>	34
6.4.1	Security Functional Requirements	34
6.4.2	Sufficiency of Security Requirements	34
6.4.3	Security Assurance Requirements	35
6.4.4	Security Assurance Requirements Rationale	36
6.4.5	Security Assurance Requirements Evidence	36
7	TOE Summary Specification	37
7.1	<i>TOE Security Functions</i>	37
7.2	<i>Security Audit</i>	37
7.3	<i>Cryptographic Support</i>	38
7.4	<i>User Data Protection</i>	40
7.5	<i>Identification and Authentication</i>	40
7.6	<i>Security Management</i>	42
7.7	<i>Protection of the TSF</i>	42
7.8	<i>TOE Access</i>	45
7.9	<i>Trusted Path/Channels</i>	46
7.10	<i>Stateful Traffic Filtering (FWEP)</i>	46
7.11	<i>RFC Conformance Statements</i>	50
7.12	<i>800-56 Conformance Statements</i>	53
7.12.1	Finite Field-Based Key Establishment Schemes	53
7.12.2	Elliptic Curve Cryptography-Based Schemes (ECC Scheme)	56

List of Tables

Table 1-1 – ST Organization and Section Descriptions	7
Table 1-2 – Acronyms Used in Security Target	9
Table 1-3 - Evaluated Configuration of the TOE	12
Table 1-4 – Logical Boundary Descriptions.....	13
Table 3-1 – Threats from the NDPP addressed by the TOE	16
Table 3-2 - Threats from the FWEP addressed by the TOE.....	17
Table 3-3 – Organizational Security Policies.....	17
Table 3-4 – Assumptions from the NDPP	17
Table 3-5 - Assumptions from the FWEP	17
Table 4-1 – TOE Security Objectives	18
Table 4-2 – Operational Environment Security Objectives from NDPP.....	19
Table 4-3 - Operational Environment Security Objectives from FWEP	19
Table 6-1 – TOE Security Functional Requirements	22
Table 6-2 - Audit Events and Details from NDPP	24
Table 6-3 - Audit Events and Details from FWEP.....	24
Table 6-4 – Rationale for TOE SFRs to Objectives from NDPP.....	35
Table 6-5 – Rationale for TOE SFRs to Objectives from FWEP.....	35
Table 6-6 – Security Assurance Requirements	35
Table 6-7 – Security Assurance Rationale and Measures.....	36
Table 7-1 - Key Zeroization Handling.....	39
Table 7-2 – Configuring Users With Access Restrictions	45
Table 7-3 - Traffic filtering RFCs.....	49
Table 7-4 – RFC Conformance Statements	53
Table 7-5 – 800-56A Conformance Statements.....	56

List of Figures

Figure 1 - TOE Boundary	11
Figure 2 - Self Test Example.....	44

1 Introduction

This section identifies the Security Target (ST), Target of Evaluation (TOE), Security Target organization, document conventions, and terminology. It also includes an overview of the evaluated product.

1.1 ST Reference

ST Title	Security Target: Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms
ST Revision	2.1
ST Publication Date	August 26, 2013
Author	Apex Assurance Group, LLC

1.2 TOE Reference

TOE Reference	Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms
----------------------	--

1.3 Document Organization

This Security Target follows the following format:

SECTION	TITLE	DESCRIPTION
1	Introduction	Provides an overview of the TOE and defines the hardware and software that make up the TOE as well as the physical and logical boundaries of the TOE
2	Conformance Claims	Lists evaluation conformance to Common Criteria versions, Protection Profiles, or Packages where applicable
3	Security Problem Definition	Specifies the threats, assumptions and organizational security policies that affect the TOE
4	Security Objectives	Defines the security objectives for the TOE/operational environment and provides a rationale to demonstrate that the security objectives satisfy the threats
5	Extended Components Definition	Describes extended components of the evaluation (if any)
6	Security Requirements	Contains the functional and assurance requirements for this TOE
7	TOE Summary Specification	Identifies the IT security functions provided by the TOE and also identifies the assurance measures targeted to meet the assurance requirements.

Table 1-1 – ST Organization and Section Descriptions

1.4 Document Conventions

The notation, formatting, and conventions used in this Security Target are consistent with those used in Version 3.1 of the Common Criteria. Selected presentation choices are discussed here to aid the Security Target reader. The Common Criteria allows several operations to be performed on functional requirements: The allowable operations defined in Part 2 of the Common Criteria are *refinement*, *selection*, *assignment* and *iteration*.

- Assignment: Indicated with *italicized* text;
- Refinement made by PP author: Indicated with **bold** text and ~~strikethroughs~~, if necessary;
- Selection: Indicated with underlined text;
- Assignment within a Selection: Indicated with *italicized and underlined* text;
- Iteration: Indicated by appending the iteration number in parenthesis, e.g., (1), (2), (3).

Explicitly stated SFRs are identified by having a label ‘EXT’ after the requirement name for TOE SFRs. When not embedded in a Security Functional Requirement, italicized text is used for both official document titles and text meant to be emphasized more than plain text.

1.5 Document Terminology

The following table describes the acronyms used in this document:

TERM	DEFINITION
AES	Advanced Encryption Standard
ANSI	American National Standards Institute
API	Application Program Interface
ATM	Asynchronous Transfer Method
BGP	Border Gateway Protocol
CC	Common Criteria version 3.1
CCEVS	Common Criteria Evaluation Validation Scheme
CCIMB	Common Criteria Interpretations Management Board
CCM	Counter with Cipher Block Chaining-Message Authentication Code
CLNP	Connectionless Network Protocol
CLNS	Connectionless Network Service
CM	Configuration Management
CSP	Cryptographic security parameter
DES	Data Encryption Standard
DH	Diffie Hellman
DMZ	Demilitarized Zone
DoD	Department of Defense
EAL	Evaluation Assurance Level
ECDSA	Elliptic Curve Digital Signature Algorithm

TERM	DEFINITION
ESP	Encapsulating Security Payload
FIPS	Federal Information Processing Standard
FIPS-PUB 140-2	Federal Information Processing Standard Publication
FTP	File Transfer Protocol
GIG	Global Information Grid
GUI	Graphical User Interface
HMAC	Keyed-Hash Authentication Code
HTTP	Hypertext Transfer Protocol
I&A	Identification and Authentication
IATF	Information Assurance Technical Framework
ICMP	Internet Control Message Protocol
ID	Identification
IDS	Intrusion Detection System
IETF	Internet Engineering Task Force
IKE	Internet Key Exchange
IP	Internet Protocol
IPsec	Internet Protocol Security
IPsec ESP	Internet Protocol Security Encapsulating Security Payload
IPv6	Internet Protocol Version 6
IPX	Internetwork Packet Exchange
ISAKMP	Internet Security Association and Key Management Protocol
IS-IS	Intermediate System-to-Intermediate System
ISO	International Organization for Standardization
IT	Information Technology
Junos	Juniper Operating System
LDP	Label Distribution Protocol
MAC	Mandatory Access Control
MRE	Medium Robustness Environment
NAT	Network Address Translation
NBIAT&S	Network Boundary Information Assurance Technologies and Solutions Support
NDPP	Network Devices Protection Profile
NIAP	National Information Assurance Program
NIST	National Institute of Standards Technology
NSA	National Security Agency
NTP	Network Time Protocol
OSI	Open Systems Interconnect
OSP	Organizational Security Policy
OSPF	Open Shortest Path First
PFE	Packet Forwarding Engine
PIC/PIM	Physical Interface Card/Module
PKI	Public Key Infrastructure
PP	Protection Profile
PRNG	Pseudo Random Number Generator
RE	Routing Engine

TERM	DEFINITION
RFC	Request for Comment
RIP	Routing Information Protocol
RNG	Random Number Generator
RNG	Random Number Generator
RSA	Rivest, Shamir, Adelman
SA	Security Association
SCEP	Simple Certificate Enrollment Protocol
SFP	Security Functional Policy
SFR	Security Functional Requirement
SHA	Secure Hash Algorithm
SMTP	Simple Mail Transfer Protocol
SNMP	Simple Network Management Protocol
SOF	Strength of Function
SSH	Secure Shell
SSL	Secure Sockets Layer
ST	Security Target
TBD	To Be Determined
TCP/IP	Transmissions Control Protocol/ Internet Protocol
TDEA	Triple Data Encryption Algorithm
TFTP	Trivial File Transfer Protocol
TOE	Target of Evaluation
TSC	TOE Scope of Control
TSE	TOE Security Environment
TSF	TOE Security Function
TSFI	TSF interfaces
TSP	TOE Security Policy
TTAP/CCEVS	Trust Technology Assessment Program/ Common Criteria Evaluation Standard Scheme
UDP	User Datagram Protocol
URL	Uniform Resource Locator
VPN	Virtual Private Network

Table 1-2 – Acronyms Used in Security Target

1.6 TOE Overview

The TOE is Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms which primarily supports the definition of and enforces information flow policies among network nodes. The routers provide for stateful inspection of every packet that traverses the network and provide central management to manage the network security policy. All information flow from one network node to another passes through an instance of the TOE. Information flow is controlled on the basis of network node addresses, protocol, type of access requested, and services requested. In support of the information flow security functions, the TOE ensures that security-relevant activity is audited, that their own functions are protected from potential attacks, and provide the security tools to manage all of the security functions.

The JUNOS 12.1 X44 D15.5 for SRX Series Platforms may also be referred to as the TOE in this document.

1.7 TOE Description

1.7.1 Overview

Each Juniper Networks routing platform is a complete routing system that supports a variety of high-speed interfaces for medium/large networks and network applications. Juniper Networks routers share common JUNOS software, features, and technology for compatibility across platforms.

The routers are physically self-contained, housing the software, firmware and hardware necessary to perform all router functions. The hardware has two components: the router itself and various PIC/PIMs, which allow the routers to communicate with the different types of networks that may be required within the environment where the routers are used.

Each instance of the TOE consists of the following major architectural components:

- The Routing Engine (RE) runs the JUNOS software and provides Layer 3 routing services and network management for all operations necessary for the configuration and operation of the TOE and controls the flow of information through the TOE, including Network Address Translation (NAT) and all operations necessary for the encryption/decryption of packets for secure communication via the IPSec protocol;
- The Packet Forwarding Engine (PFE) provides all operations necessary for transit packet forwarding;

The Routing Engine and Packet Forwarding Engine perform their primary tasks independently, while constantly communicating through a high-speed internal link. This arrangement provides streamlined forwarding and routing control and the capability to run Internet-scale networks at high speeds.

The routers support numerous routing standards for flexibility and scalability as well as IETF IPSec protocols as defined in RFC2401- RFC2410. These functions can all be managed through the JUNOS software, either from a connected terminal console or via a network connection. Network management can be secured using SSL, SNMP v3, and SSH protocols. All management, whether from a user connecting to a terminal or from the network, requires successful authentication and is communicated using JUNOScript. Net conf is an IETF standardization effort which is closely aligned to JUNOScript. JUNOS only supports netconf via SSH transport, and authentication is handled by SSHD.

Juniper Networks security devices accomplish routing through a process called a virtual router (VR). A security device divides its routing component into two or more VRs with each VR maintaining its own list of known networks in the form of a routing table, routing logic, and associated security zones.

The TOE is managed and configured via Command Line Interface using SSH connections.

1.7.2 Physical Boundary

The TOE is a combined hardware/software TOE and is defined as the JUNOS 12.1 X44 D15.5 for SRX Series Platforms. The TOE boundary is shown below.

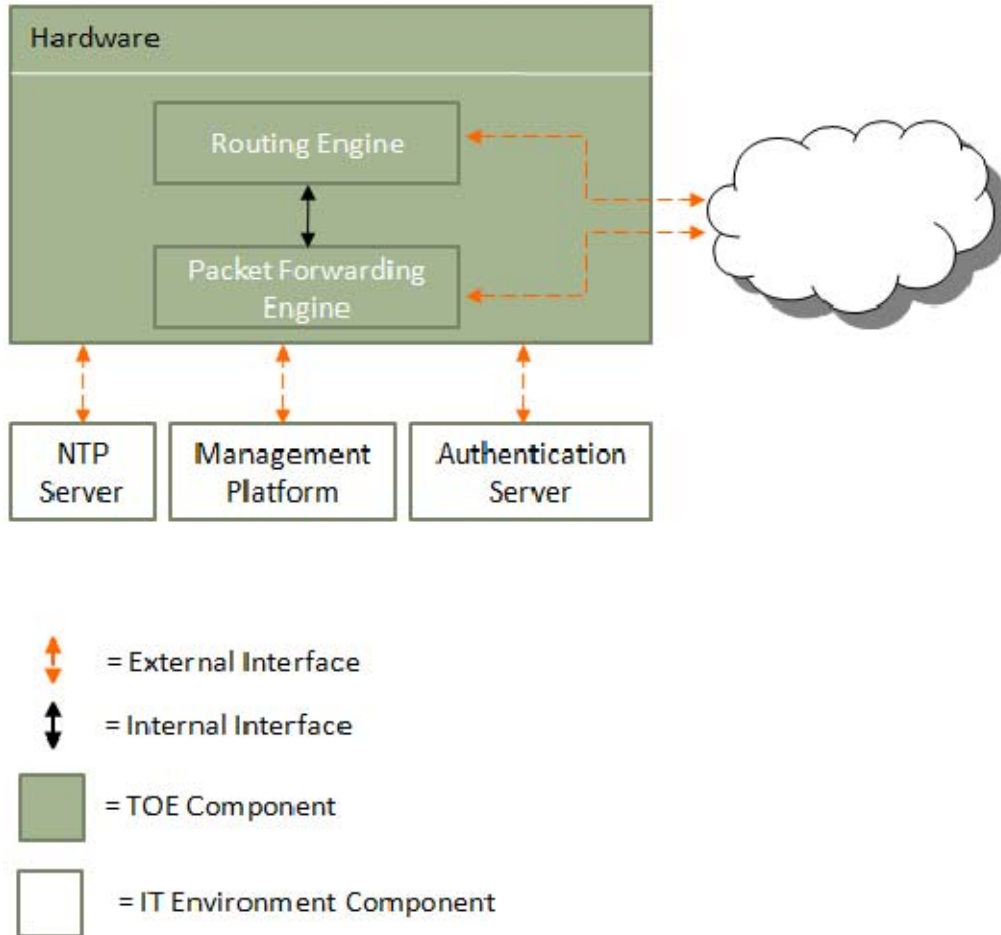


Figure 1 - TOE Boundary

The marketing name for the board that implements the PFE on the SRX 5000 series is the Services Processing Card (SPC). There are two models of the SPC available for the SRX 5000 series, and both will be evaluated. No other SRX models have a similar option.

The physical boundary is defined as the entire router chassis. In order to comply with the evaluated configuration, the following hardware and software components should be used:

TOE COMPONENT	VERSION/MODEL NUMBER
Software Version	JUNOS US/Canada Version 12.1 X44 D15.5 JUNOS FIPS Version 12.1 X44 D15.5

TOE COMPONENT	VERSION/MODEL NUMBER
Hardware Platforms	SRX100, SRX110, SRX210, SRX220, SRX240, SRX550, SRX650, SRX1400; SRX3400, SRX3600; SRX5600 and SRX5800 with SPC-2-10-40; and SRX5600 and SRX5800 with SPC-4-15-320.

Table 1-3 - Evaluated Configuration of the TOE

The TOE interfaces are comprised of the following:

1. Network interfaces which pass traffic
2. Management interface through which handle administrative actions.

1.7.3 Logical Boundary

This section outlines the boundaries of the security functionality of the TOE; the logical boundary of the TOE includes the security functionality described in the following table:

TSF	DESCRIPTION
Security Audit	JUNOS auditable events are stored in the syslog files, and can be sent to an external log server (via Netconf over SSH). Auditable events include start-up and shutdown of the audit functions, authentication events, service requests, as well as the events listed in the table in Section 8. Audit records include the date and time, event category, event type, username, and the outcome of the event (success or failure). Local syslog storage limits are configurable and are monitored. In the event of storage limits being reached the oldest logs will be overwritten.
Cryptographic Support	The TOE includes a baseline cryptographic module that provides confidentiality and integrity services for authentication and for protecting communications with adjacent systems.
User Data Protection/Information Flow Control	The TOE is designed to forward network packets (i.e., information flows) from source network entities to destination network entities based on available routing information. This information is either provided directly by TOE users or indirectly from other network entities (outside the TOE) configured by the TOE users. The TOE has the capability to regulate the information flow across its interfaces; traffic filters can be set in accordance with the presumed identity of the source, the identity of the destination, the transport layer protocol, the source service identifier, and the destination service identifier (TCP or UDP port number).
Identification and Authentication	The TOE requires users to provide unique identification and authentication data before any administrative access to the system is granted. The devices also require that applications exchanging information with them successfully authenticate prior to any exchange. This covers all services used to exchange information, including Secure Shell (SSH). Telnet, File Transfer Protocol (FTP), Secure Socket Layer (SSL) are out of scope.

TSF	DESCRIPTION
Security Management	The TOE provides an authorized Administrator role that is responsible for: <ul style="list-style-type: none"> • the configuration and maintenance of cryptographic elements related to the establishment of secure connections to and from the evaluated product • the regular review of all audit data; • all administrative tasks (e.g., creating the security policy). The devices are managed through a Command Line Interface (CLI). The CLI is accessible through remote administrative session.
Protection of the TSF	The TOE provides protection mechanisms for its security functions. One of the protection mechanisms is to protect TFS data (e.g. cryptographic keys, administrator passwords). Another protection mechanism is to ensure the integrity of any software/firmware updates are can be verified prior to installation. The TOE provides for both cryptographic and non-cryptographic self-tests, and is capable of automated recovery from failure states. Also, reliable timestamp is made available by the TOE.
TOE Access	The TOE can be configured to terminate interactive user sessions, and to present an access banner with warning messages prior to authentication.
Trusted Path/Channels	The TOE creates trusted channels between itself and remote trusted authorized IT product (e.g. syslog server) entities that protect the confidentiality and integrity of communications. The TOE creates trusted paths between itself and remote administrators and users that protect the confidentiality and integrity of communications.
Stateful Traffic Filtering	The TOE provides stateful network traffic filtering based on examination of network packets and the application of information flow rules.

Table 1-4 – Logical Boundary Descriptions

1.7.4 Summary of Out-of-Scope Items

The following items are out of the scope of the evaluation:

- External syslog server
- Use of telnet, since it violates the Trusted Path requirement set (see Security Requirements)
- Use of FTP, since it violates the Trusted Path requirement set (see Security Requirements)
- Use of SNMP, since it violates the Trusted Path requirement set (see Security Requirements)
- Management via J-Web, since it violates the Trusted Path requirement set (see Security Requirements)
- Media use (other than during installation of the TOE)

1.7.5 TOE Security Functional Policies

Since the NDPP and FWEP do not require it, the TOE does not support any Security Functional Policy.

1.7.6 TOE Product Documentation

The TOE includes the following product documentation:

- *Junos OS Installation and Upgrade Guide Release 12.1 X44*

Security Target: Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms

- *Junos OS CLI User Guide Release 12.1 X44*
- *Junos OS System Basics: Getting Started Configuration Guide Release 12.1 X44*
- *Common Criteria Secure Configuration Guide for SRX Series Security Devices, Release 12.1, Published: 2013-07-24*

2 Conformance Claims

2.1 CC Conformance Claim

The TOE is Common Criteria Version 3.1 Revision 3 (July 2009) Part 2 extended and Part 3 extended.

2.2 Protection Profile Conformance Claim

The TOE claims conformance to the following U.S. Government approved Protection Profiles (PP):

- Security Requirements for Network Devices, Version 1.1, 08 June 2012 (NDPP)
- Network Device Protection Profile (NDPP) Extended Package Stateful Traffic Filter Firewall, Version 1.0, 19 December 2011 (FWEP)

2.2.1 TOE Type Consistency

Both the PP and the TOE describe network device systems and firewalls.

2.2.2 Security Problem Definition Consistency

This ST claims demonstrable conformance to the referenced PPs. The threats, assumptions, and organizational security policies in the ST are identical to the threats, assumptions, and organizational security policies in the PPs.

2.2.3 Security Objectives Consistency

This ST claims demonstrable conformance to the objectives in the referenced PPs. No additions or deletions to the objectives have been made. All objectives are consistent with the PPs.

2.2.4 Security Functional Requirements Consistency

This ST claims demonstrable conformance to the security functional requirements in the referenced PPs.

2.2.5 Security Assurance Requirements Consistency

This ST claims demonstrable conformance to the security assurance requirements in the referenced PPs.

2.3 Package Claim

The TOE claims conformance to Security Requirements for Network Devices, Version 1.1, 08 June 2012 and the Network Device Protection Profile (NDPP) Extended Package Stateful Traffic Filter Firewall, Version 1.0, 19 December 2011 (FWEP) and no other assurance or functional packages.

3 Security Problem Definition

The security problem to be addressed by the TOE is described by threats and policies that are common to network devices, as opposed to those that might be targeted at the specific functionality of a specific type of network device, as specified in [NDPP] and [FWEP].

This chapter identifies assumptions as A.assumption, threats as T.threat and policies as P.policy.

Note that the assumptions, threats, and policies are the same as those found in [NDPP] and [FWEP] such that this TOE serves to address the Security Problem.

3.1 Threats

The following threats are addressed by the TOE, as detailed in table 4 of [NDPP] Annex A.

THREAT	DESCRIPTION
T.ADMIN_ERROR	An administrator may unintentionally install or configure the TOE incorrectly, resulting in ineffective security mechanisms.
T.TSF_FAILURE	Security mechanisms of the TOE may fail, leading to a compromise of the TSF.
T.UNDETECTED_ACTIONS	Malicious remote users or external IT entities may take actions that adversely affect the security of the TOE. These actions may remain undetected and thus their effects cannot be effectively mitigated.
T.UNAUTHORIZED_ACCESS	A user may gain unauthorized access to the TOE data and TOE executable code. A malicious user, process, or external IT entity may masquerade as an authorized entity in order to gain unauthorized access to data or TOE resources. A malicious user, process, or external IT entity may misrepresent itself as the TOE to obtain identification and authentication data.
T.UNAUTHORIZED_UPDATE	A malicious party attempts to supply the end user with an update to the product that may compromise the security features of the TOE.
T.USER_DATA_REUSE	User data may be inadvertently sent to a destination not intended by the original sender.

Table 3-1 – Threats from the NDPP addressed by the TOE

The following threats are addressed by the TOE, as detailed in section 5.1.2 of [FWEP].

THREAT	DESCRIPTION
T.NETWORK_DISCLOSURE	Sensitive information on a protected network might be disclosed resulting from ingress- or egress-based actions.
T.NETWORK_ACCESS	Unauthorized access may be achieved to services on a protected network from outside that network, or alternately services outside a protected network from inside the protected network.

THREAT	DESCRIPTION
T.NETWORK_MISUSE	Access to services made available by a protected network might be used counter to Operational Environment policies.
T.NETWORK_DOS	Attacks against services inside a protected network, or indirectly by virtue of access to malicious agents from within a protected network, might lead to denial of services otherwise available within a protected network.

Table 3-2 - Threats from the FWEF addressed by the TOE

3.2 Organizational Security Policies

An organizational security policy is a set of rules, practices, and procedures imposed by an organization to address its security needs. The TOE is required to meet the following organizational security policies, as specified in table 5 of [NDPP] Annex A. :

POLICY	DESCRIPTION
P.ACCESS_BANNER	The TOE shall display an initial banner describing restrictions of use, legal agreements, or any other appropriate information to which users consent by accessing the TOE.

Table 3-3 – Organizational Security Policies

3.3 Assumptions

This section contains assumptions regarding the security environment and the intended usage of the TOE, as specified in table 3 of [NDPP] Annex A.

ASSUMPTION	DESCRIPTION
A.NO_GENERAL_PURPOSE	It is assumed that there are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE.
A.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it contains, is assumed to be provided by the environment.
A.TRUSTED_ADMIN	TOE Administrators are trusted to follow and apply all administrator guidance in a trusted manner.

Table 3-4 – Assumptions from the NDPP

This section contains assumptions regarding the security environment and the intended usage of the TOE, as specified in section 5.1.1 of [FWEF].

ASSUMPTION	DESCRIPTION
A.CONNECTIONS	It is assumed that the TOE is connected to distinct networks in a manner that ensures that the TOE security policies will be enforced on all applicable network traffic flowing among the attached networks.

Table 3-5 - Assumptions from the FWEF

4 Security Objectives

4.1 Security Objectives for the TOE

The IT Security Objectives for the TOE are detailed below, as specified in table 6 of [NDPP] Annex A.

OBJECTIVES	DESCRIPTION
O.PROTECTED_COMMUNICATIONS	The TOE will provide protected communication channels for administrators, other parts of a distributed TOE, and authorized IT entities.
O.VERIFIABLE_UPDATES	The TOE will provide the capability to help ensure that any updates to the TOE can be verified by the administrator to be unaltered and (optionally) from a trusted source.
O.SYSTEM_MONITORING	The TOE will provide the capability to generate audit data and send those data to an external IT entity.
O.DISPLAY_BANNER	The TOE will display an advisory warning regarding use of the TOE.
O.TOE_ADMINISTRATION	The TOE will provide mechanisms to ensure that only administrators are able to log in and configure the TOE, and provide protections for logged-in administrators.
O.RESIDUAL_INFORMATION_CLEARING	The TOE will ensure that any data contained in a protected resource is not available when the resource is reallocated.
O.SESSION_LOCK	The TOE shall provide mechanisms that mitigate the risk of unattended sessions being hijacked.
O.TSF_SELF_TEST	The TOE will provide the capability to test some subset of its security functionality to ensure it is operating properly.

Table 4-1 – TOE Security Objectives

The IT Security Objectives for the TOE are detailed below, as specified in section 5.2.1 of [FWEP].

OBJECTIVES	DESCRIPTION
O.ADDRESS_FILTERING	The TOE will provide the means to filter and log network packets based on source and destination addresses.
O.PORT_FILTERING	The TOE will provide the means to filter and log network packets based on source and destination transport layer ports.
O.STATEFUL_INSPECTION	The TOE will determine if a network packet belongs to an allowed established connection before applying the ruleset.
O.RELATED_CONNECTION_FILTERING	For specific protocols, the TOE will dynamically permit a network packet flow in response to a connection permitted by the ruleset.

4.2 Security Objectives for the Operational Environment

The security objectives for the operational environment are detailed below, as specified in table 7 of [NDPP] Annex A.

OBJECTIVE	DESCRIPTION
OE.NO_GENERAL_PURPOSE	There are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE.
OE.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it contains, is provided by the environment.
OE.TRUSTED_ADMIN	TOE Administrators are trusted to follow and apply all administrator guidance in a trusted manner.

Table 4-2 – Operational Environment Security Objectives from NDPP.

The security objectives for the operational environment are detailed below, as specified in section 5.2.2 of [FWEP].

OBJECTIVE	DESCRIPTION
OE.CONNECTIONS	TOE administrators will ensure that the TOE is installed in a manner that will allow the TOE to effectively enforce its policies on network traffic flowing among attached networks.

Table 4-3 - Operational Environment Security Objectives from FWEP

4.3 Security Objectives Rationale

As these objectives for the TOE and operational environment are the same as those specified in [NDPP] and [FWEP], the rationales provided in the prose of [NDPP] Section 3, in the tables in [NDPP] Annex A, and section 5 of [FWEP] are wholly applicable to this security target as the statements of threats, assumptions, OSPs and security objectives provided in this security target are the same as those defined in the [NDPP] and [FWEP].

5 Extended Components Definition

The following extended components are defined by the NDPP. The definition of these components is given in NDPP.

- FAU_STG_EXT.1
- FCS_CKM_EXT.4
- FCS_RBG_EXT.1
- FCS_SSH_EXT.1
- FIA_PMG_EXT.1
- FIA_UIA_EXT.1
- FIA_UAU_EXT.5
- FPT_SKP_EXT.1
- FPT_APW_EXT.1
- FPT_TUD_EXT.1
- FPT_TST_EXT.1
- FTA_SSL_EXT.1

The following extended components are defined by the FWEP. The definition of these components is given in FWEP.

- FFW_RUL_EXT.1

5.1 Rationale for Extended Components

This ST includes these extended components to conform to the NDPP and FWEP requirements.

6 Security Requirements

The security requirements that are levied on the TOE and the Operational environment are specified in this section of the ST.

6.1 Security Functional Requirements

This section specifies the security functional requirements (SFRs) for the TOE, organized by CC class as specified in [NDPP] and [FWEP].

The following table identifies all the SFR's implemented by the TOE.

CLASS HEADING	CLASS_FAMILY	DESCRIPTION
Security Audit	FAU_GEN.1	Audit Data Generation
	FAU_GEN.2	User Identity Association
	FAU_STG_EXT.1	External Audit Trail Storage
Cryptographic Support	FCS_CKM.1	Cryptographic Key Generation (for asymmetric keys)
	FCS_CKM_EXT.4	Cryptographic Key Zeroization
	FCS_COP.1(1)	Cryptographic Operation (for data encryption/decryption)
	FCS_COP.1(2)	Cryptographic Operation (for cryptographic signature)
	FCS_COP.1(3)	Cryptographic Operation (for cryptographic hashing)
	FCS_COP.1(4)	Cryptographic Operation (for keyed-hash message authentication)
	FCS_RBG_EXT.1	Extended: Cryptographic Operation (Random Bit Generation)
FCS_SSH_EXT.1	Explicit SSH	
User Data Protection	FDP_RIP.2	Full residual information protection
Identification and Authentication	FIA_PMG_EXT.1	User Identification and Authentication
	FIA_UIA_EXT.1	Extended: Password-based Authentication Mechanism
	FIA_UAU_EXT.2	Extended: Password-based Authentication Mechanism
	FIA_UAU.7	Protected Authentication Feedback
Security Management	FMT_MTD.1	Management of TSF Data (for general TSF data)
	FMT_SMF.1	Specification of Management Functions
	FMT_SMR.2	Security Roles
Protection of the TSF	FPT_SKP_EXT.1	Extended: Protection of TSF Data (for reading of all symmetric keys)
	FPT_APW_EXT.1	Extended: Protection of Administrator Passwords
	FPT_STM.1	Reliable Time Stamps
	FPT_TUD_EXT.1	Extended: Trusted Update
	FPT_TST_EXT.1	TSF Testing
TOE Access	FTA_SSL_EXT.1	TSF-initiated session locking
	FTA_SSL.3	TSF-initiated termination
	FTA_SSL.4	User-initiated termination
	FTA_TAB.1	Default TOE access banners

CLASS HEADING	CLASS_FAMILY	DESCRIPTION
Trusted Path/Channels	FTP_ITC.1	Inter-TSF trusted channel
	FTP_TRP.1	Trusted path
Stateful Traffic Filtering	FFW_RUL_EXT.1	Stateful Traffic Filtering

Table 6-1 – TOE Security Functional Requirements

6.1.1 Security Audit (FAU)

6.1.1.1 FAU_GEN.1 Audit Data Generation

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- Start-up of the audit functions;
- All auditable events for the not specified level of audit; and
- All Administrative actions;
- [*Specifically defined auditable events listed in Table 6-2 - Audit Events and Details*].

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- Date and time of the event, type of event, subject identity, and the outcome (success or failure) of the event; and
- For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, [*information specified in column three of Table 6-2 - Audit Events and Details*].

REQUIREMENT	AUDITABLE EVENTS	ADDITIONAL DETAILS
FAU_GEN.1	None.	
FAU_GEN.2	None.	
FAU_STG_EXT.1	None.	
FCS_CKM.1	None.	
FCS_CKM_EXT.4	None.	
FCS_COP.1(1)	None.	
FCS_COP.1(2)	None.	
FCS_COP.1(3)	None.	
FCS_COP.1(4)	None.	
FCS_RBG_EXT.1	None.	

REQUIREMENT	AUDITABLE EVENTS	ADDITIONAL DETAILS
FCS_SSH_EXT.1	Failure to establish an SSH session. Establishment/Termination of an SSH session	Reason for failure. Non-TOE endpoint of connection (IP address) for both successes and failures.
FDP_RIP.2	None.	
FIA_PMG_EXT.1	None.	
FIA_UIA_EXT.1	All use of the identification and authentication mechanism.	Provided user identity, origin of the attempt (e.g., IP address).
FIA_UAU_EXT.2	All use of the authentication mechanism	Origin of the attempt (e.g., IP address).
FIA_UAU.7	None.	
FMT_MTD.1	None.	
FMT_SMF.1	None.	
FMT_SMR.2	None.	
FPT_SKP_EXT.1	None.	
FPT_APW_EXT.1	None.	
FPT_STM.1	Changes to the time.	The old and new values for the time. Origin of the attempt (e.g., IP address).
FPT_TUD_EXT.1	Initiation of update.	No additional information.
FPT_TST_EXT.1	Indication that TSF self-test was completed.	Any additional information generated by the tests beyond "success" or "failure".
FTA_SSL_EXT.1	Any attempts at unlocking of an interactive session.	No additional information
FTA_SSL.3	The termination of a remote session by the session locking mechanism.	No additional information.
FTA_SSL.4	The termination of an interactive session.	No additional information.
FTA_TAB.1	None.	
FTP_ITC.1	Initiation of the trusted channel. Termination of the trusted channel. Failure of the trusted channel functions.	Identification of the initiator and target of failed trusted channels establishment attempt.

REQUIREMENT	AUDITABLE EVENTS	ADDITIONAL DETAILS
FTP_TRP.1	Initiation of the trusted channel. Termination of the trusted channel. Failures of the trusted path functions.	Identification of the claimed user identity.

Table 6-2 - Audit Events and Details from NDPP

REQUIREMENT	AUDITABLE EVENTS	ADDITIONAL DETAILS
FFW_RUL_EXT.1	Application of rules configured with the 'log' operation	Source and destination addresses Source and destination ports Transport Layer Protocol TOE Interface
	Indication of packets dropped due to too much network traffic	TOE interface that is unable to process packets

Table 6-3 - Audit Events and Details from FWEP

6.1.1.2 *FAU_GEN.2 User Identity Association*

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

6.1.1.3 *FAU_STG_EXT.1 External Audit Trail Storage*

FAU_STG_EXT.1.1 The TSF shall be able to transmit the generated audit data to an external IT entity using a trusted channel implementing the SSH protocol.

6.1.2 Cryptographic Support

6.1.2.1 *FCS_CKM.1 Cryptographic Key Generation (for asymmetric keys)*

FCS_CKM.1.1 **Refinement:** The TSF shall generate **asymmetric** cryptographic keys **used for key establishment** in accordance with:

- NIST Special Publication 800-56A, "Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography" for finite field-based key establishment schemes

and specified cryptographic key sizes equivalent to, or greater than, a symmetric key strength of 112 bits.

6.1.2.2 *FCS_CKM_EXT.4 Cryptographic Key Zeroization*

FCS_CKM_EXT.4.1 The TSF shall zeroize all plaintext secret and private cryptographic keys and CSPs when no longer required.

6.1.2.3 *FCS_COP.1(1) Cryptographic Operation (for data encryption/decryption)*

FCS_COP.1.1(1) **Refinement:** The TSF shall perform [*encryption and decryption*] in accordance with a specified cryptographic algorithm [AES operating in **CBC mode**] and cryptographic key sizes 128-bits, 256-bits, and **192 bits** that meets the following:

- **FIPS PUB 197, “Advanced Encryption Standard (AES)”**
- **NIST SP 800-38A**

6.1.2.4 *FCS_COP.1(2) Cryptographic Operation (for cryptographic signature)*

FCS_COP.1.1(2) **Refinement:** The TSF shall perform **cryptographic signature services** in accordance with a **RSA Digital Signature Algorithm (rDSA) with a key size (modulus) of 2048 bits or greater**

that meets the following:

- **FIPS PUB 186-2, "Digital Signature Standard"**

6.1.2.5 *FCS_COP.1(3) Cryptographic Operation (for cryptographic hashing)*

FCS_COP.1.1(3) **Refinement:** The TSF shall perform [*cryptographic hashing services*] in accordance with a specified cryptographic algorithm **SHA-1** and **message digest sizes 160 bits**. that meet the following: *FIPS Pub 180-3, “Secure Hash Standard.”*

6.1.2.6 *FCS_COP.1(4) Cryptographic Operation (for keyed-hash message authentication)*

FCS_COP.1.1(4) **Refinement:** The TSF shall perform [*keyed-hash message authentication*] in accordance with a specified cryptographic algorithm HMAC- **SHA-1**, **key size 160 (in bits) used in HMAC, and message digest sizes 160 bits** that meet the following: *FIPS Pub 198-1, "The Keyed-Hash Message Authentication Code, and FIPS Pub 180-3, “Secure Hash Standard.”*

6.1.2.7 *FCS_RBG_(EXT).1 Extended: Cryptographic Operation (Random Bit Generation)*

FCS_RBG_(EXT).1.1 The TSF shall perform all random bit generation (RBG) services in accordance with **NIST Special Publication 800-90 using HMAC_DRBG (any)** seeded by an entropy source that accumulated entropy from a **TSF-hardware-based noise source**.

FCS_RBG_(EXT).1.2 The deterministic RBG shall be seeded with a minimum of 256 bits of entropy at least equal to the greatest bit length of the keys and authorization factors that it will generate.

6.1.2.8 *Explicit: SSH (FCS_SSH_EXT)*

FCS_SSH_EXT.1.1 The TSF shall implement the SSH protocol that complies with RFCs 4251, 4252, 4253, and 4254.

FCS_SSH_EXT.1.2 The TSF shall ensure that the SSH protocol implementation supports the following authentication methods as described in RFC 4252: public key-based, password-based.

FCS_SSH_EXT.1.3 The TSF shall ensure that, as described in RFC 4253, packets greater than 32768 bytes in an SSH transport connection are dropped.

FCS_SSH_EXT.1.4 The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms: AES-CBC-128, AES-CBC-256, no other algorithms.

FCS_SSH_EXT.1.5 The TSF shall ensure that the SSH transport implementation uses SSH_RSA and no other public key algorithms as its public key algorithm(s).

FCS_SSH_EXT.1.6 The TSF shall ensure that data integrity algorithms used in SSH transport connection is hmac-sha1.

FCS_SSH_EXT.1.7 The TSF shall ensure that diffie-hellman-group14-sha1 is the only allowed key exchange method used for the SSH protocol.

6.1.3 **User Data Protection (FDP)**

6.1.3.1 *FDP_RIP.2 Full Residual Information Protection*

FDP_RIP.2.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the allocation of the resource to all objects.

6.1.4 **Identification and Authentication (FIA)**

6.1.4.1 *FIA_PMG_EXT.1 Password Management*

FIA_PMG_EXT.1.1 The TSF shall provide the following password management capabilities for administrative passwords:

1. Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special characters “!” “@” “#” “\$” “%” “^” “&” “*” “(” “)” and no other characters;

2. Minimum password length shall be settable by the Security Administrator, and support passwords of 15 characters or greater;

6.1.4.2 *FIA_UAU_EXT.2 Extended: Password-based Authentication Mechanism*

FIA_UAU_EXT.2.1 The TSF shall provide a local password-based authentication mechanism, public key-based authentication to perform user authentication.

6.1.4.3 *User Identification and Authentication (FIA_UIA_EXT.1)*

FIA_UIA_EXT.1.1 The TSF shall allow the following actions prior to requiring the non-TOE entity to initiate the identification and authentication process:

- Display the warning banner in accordance with FTA_TAB.1;
- ping, and arp services.

FIA_UIA_EXT.1.2 The TSF shall require each administrative user to be successfully identified and authenticated before allowing any other TSF-mediated actions on behalf of that administrative user.

6.1.4.4 *FIA_UAU.7 Protected Authentication Feedback*

FIA_UAU.7.1 The TSF shall provide only *obscured feedback* to the administrative user while the authentication is in progress at the local console.

6.1.5 Security Management (FMT)

6.1.5.1 *FMT_MTD.1 Management of TSF Data (for general TSF data)*

FMT_MTD.1.1 The TSF shall restrict the ability to manage the TSF data to the Security Administrators.

6.1.5.2 *FMT_SMF.1 Specification of Management Functions*

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions:

- *Ability to administer the TOE locally and remotely;*
- *Ability to update the TOE, and to verify the updates using digital signature capability prior to installing those updates;*
- *Ability to configure Firewall rules (from FWEP). and*
- *No other capabilities.*

6.1.5.3 *FMT_SMR.2 Restrictions on Security Roles*

FMT_SMR.2.1 The TSF shall maintain the roles:

- **Authorized Administrator**

FMT_SMR.2.2 The TSF shall be able to associate users with roles.

FMT_SMR.2.3 The TSF shall ensure that the conditions

- **Authorized Administrator role shall be able to administer the TOE locally;**
- **Authorized Administrator role shall be able to administer the TOE remotely;**

are satisfied.

6.1.6 Protection of the TSF (FPT)

6.1.6.1 *FPT_SKP_EXT.1 Extended: Protection of TSF Data (for reading of all symmetric keys)*

FPT_SKP_EXT.1.1 The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

6.1.6.2 *FPT_APW_EXT.1 Extended: Protection of Administrator Passwords*

FPT_APW_EXT.1.1 The TSF shall store passwords in non-plaintext form.

FPT_APW_EXT.1.2 The TSF shall prevent the reading of plaintext passwords.

6.1.6.3 *FPT_STM.1 Reliable Time Stamps*

FPT_STM.1.1 The TSF shall be able to provide reliable time stamps for its own use.

6.1.6.4 *FPT_TUD_EXT.1 Extended: Trusted Update*

FPT_TUD_EXT.1.1 The TSF shall provide security administrators the ability to query the current version of the TOE firmware/software.

FPT_TUD_EXT.1.2 The TSF shall provide security administrators the ability to initiate updates to TOE firmware/software.

FPT_TUD_EXT.1.3 The TSF shall provide a means to verify firmware/software updates to the TOE using a digital signature mechanism prior to installing those updates.

6.1.6.5 *FPT_TST_EXT.1: TSF Testing*

FPT_TST_EXT.1.1 The TSF shall run a suite of self tests during initial start-up (on power on) to demonstrate the correct operation of the TSF.

6.1.7 TOE Access

6.1.7.1 *FTA_SSL_EXT.1 TSF-initiated Session Locking*

FTA_SSL_EXT.1.1 The TSF shall for local interactive sessions,

- terminate the session

after a Security Administrator-specified time interval of session inactivity.

6.1.7.2 *FTA_SSL.3 TSF-initiated Termination*

FTA_SSL.3.1 **Refinement:** The TSF shall terminate a **remote** interactive session after a *[Security Administrator-configurable time interval of session inactivity]*.

6.1.7.3 *FTA_SSL.4 User--initiated Termination*

FTA_SSL_EXT.4.1 The TSF shall allow Administrator--initiated termination of the Administrator's own interactive session.

6.1.7.4 *FTA_TAB.1 Default TOE Access Banners*

FTA_TAB.1.1 **Refinement:** Before establishing an **administrative user** session the TSF shall display a **Security Administrator-specified advisory notice and consent** warning message regarding use of the TOE.

6.1.8 Trusted Path/Channel (FTP)

6.1.8.1 *FTP_ITC.1 Inter-TSF Trusted Channel (Prevention of Disclosure)*

FTP_ITC.1.1 **Refinement:** The TSF shall use **SSH** to provide a **trusted** communication channel between itself and **authorized IT entities supporting the following capabilities: audit server, no other capabilities** that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from **disclosure and detection of modification of the channel data**.

FTP_ITC.1.2 The TSF shall permit the TSF, or the **authorized IT entities** to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for *export of audit logs to syslog servers*.

6.1.8.2 *FTP_TRP.1 Trusted Path*

FTP_TRP.1.1 **Refinement:** The TSF shall use **SSH** to provide a **trusted** communication path between itself and **remote administrators** that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from disclosure and detection of modification of the communicated data.

FTP_TRP.1.2 **Refinement:** The TSF shall permit **remote administrators** to initiate communication via the trusted path.

FTP_TRP.1.3 The TSF shall require the use of the trusted path for *initial administrator authentication and all remote administration actions*.

6.1.9 *Stateful Traffic Filtering (FFW)*

6.1.9.1 *FFW_RUL_EXT.1 Stateful Firewall Filtering*

FFW_RUL_EXT.1.1 The TSF shall perform Stateful Traffic Filtering on network packets processed by the TOE.

FFW_RUL_EXT.1.2 The TSF shall process the following network traffic protocols:

- Internet Control Message Protocol version 4 (ICMPv4)
- Internet Control Message Protocol version 6 (ICMPv6)
- Internet Protocol (IPv4)
- Internet Protocol version 6 (IPv6)
- Transmission Control Protocol (TCP)
- User Datagram Protocol (UDP)

and be capable of inspecting network packet header fields defined by the following RFCs to the extent mandated in the other elements of this SFR

- RFC 792 (ICMPv4)
- RFC 4443 (ICMPv6)
- RFC 791 (IPv4)

- RFC 2460 (IPv6)
- RFC 793 (TCP)
- RFC 768 (UDP)

FFW_RUL_EXT.1.3

The TSF shall allow the definition of Stateful Traffic Filtering rules using the following network protocol fields:

- ICMPv4
 - Type
 - Code
- ICMPv6
 - Type
 - Code
- IPv4
 - Source address
 - Destination Address
 - Transport Layer Protocol
- IPv6
 - Source address
 - Destination Address
 - Transport Layer Protocol
- TCP
 - Source Port
 - Destination Port
- UDP
 - Source Port
 - Destination Port

and distinct interface.

- FFW_RUL_EXT.1.4 The TSF shall allow the following operations to be associated with Stateful Traffic Filtering rules: permit, deny, and log.
- FFW_RUL_EXT.1.5 The TSF shall allow the Stateful Traffic Filtering rules to be assigned to each distinct network interface.
- FFW_RUL_EXT.1.6 The TSF shall:
- a) accept a network packet without further processing of Stateful Traffic Filtering rules if it matches an allowed established session for the following protocols: TCP, UDP, ICMP based on the following network packet attributes:
 1. TCP: source and destination addresses, source and destination ports, sequence number, Flags;
 2. UDP: source and destination addresses, source and destination ports;
 3. ICMP: source and destination addresses, type, code, no other protocols.
 - b) Remove existing traffic flows from the set of established traffic flows based on the following: session inactivity timeout, completion of the expected information flow.
- FFW_RUL_EXT.1.7 The TSF shall be able to process the following network protocols:
1. FTP,
 2. no other protocols,
- to dynamically define rules or establish sessions allowing network traffic of the following types:
- FTP: TCP data sessions in accordance with the FTP protocol as specified in RFC 959,
 - none.
- FFW_RUL_EXT.1.8 The TSF shall enforce the following default Stateful Traffic Filtering rules on all network traffic:
1. The TSF shall reject and be capable of logging packets which are invalid fragments;

2. The TSF shall reject and be capable of logging fragmented IP packets which cannot be re-assembled completely;
3. The TSF shall reject and be capable of logging network packets where the source address of the network packet is equal to the address of the network interface where the network packet was received;
4. The TSF shall reject and be capable of logging network packets where the source address of the network packet does not belong to the networks associated with the network interface where the network packet was received;
5. The TSF shall reject and be capable of logging network packets where the source address of the network packet is defined as being on a broadcast network;
6. The TSF shall reject and be capable of logging network packets where the source address of the network packet is defined as being on a multicast network;
7. The TSF shall reject and be capable of logging network packets where the source address of the network packet is defined as being a loopback address;
8. The TSF shall reject and be capable of logging network packets where the source address of the network packet is a multicast;
9. The TSF shall reject and be capable of logging network packets where the source or destination address of the network packet is a link-local address;
10. The TSF shall reject and be capable of logging network packets where the source or destination address of the network packet is defined as being an address “reserved for future use” as specified in RFC 5735 for IPv4;
11. The TSF shall reject and be capable of logging network packets where the source or destination address of the network packet is defined as an “unspecified address” or an address “reserved for future definition and use” as specified in RFC 3513 for IPv6;
12. The TSF shall reject and be capable of logging network packets with the IP options: Loose Source Routing, Strict Source Routing, or Record Route specified; and
13. no other rules.

FFW_RUL_EXT.1.9 When FFW_RUL_EXT.1.6 or FFW_RUL_EXT.1.7 do not apply, the TSF shall process the applicable Stateful Traffic Filtering rules (as determined in accordance with FFW_RUL_EXT.1.5) in the following order: administrator-defined.

FFW_RUL_EXT.1.10 When FFW_RUL_EXT.1.6 or FFW_RUL_EXT.1.7 do not apply, the TSF shall deny packet flow if a matching rule is not identified.

6.2 CC Component Hierarchies and Dependencies

This section of the ST demonstrates that the identified SFRs include the appropriate hierarchy and dependencies. This ST follows exactly the security requirements included in the NDPP and FWEP. Any hierarchies and dependencies are satisfied in accordance with the NDPP and FWEP.

6.3 Security Assurance Requirements

The Security Assurance Requirements for this evaluation are listed in Section 6.4.3 – Security Assurance Requirements.

6.4 Security Requirements Rationale

6.4.1 Security Functional Requirements

This ST follows exactly the NDPP and FWEP and all of the security functional requirements within. The NDPP maps SFRs to objectives in Section 3 of the NDPP and Section 4 of the FWEP.

6.4.2 Sufficiency of Security Requirements

The following table presents a mapping of the rationale of TOE Security Requirements to Objectives as described in the NDPP Section 3 and FWEP Section 4.

OBJECTIVE	SFR
Protected Communications O.PROTECTED_COMMUNICATIONS	FCS_CKM.1 FCS_CKM_EXT.4 FCS_COP.1(1) FCS_COP.1(2) FCS_COP.1(3) FCS_COP.1(4) FCS_RBG_EXT.1 FCS_SSH_EXT.1 FTP_ITC.1 FTP_TRP.1

OBJECTIVE	SFR
Verifiable Updates O.VERIFIABLE_UPDATES	FPT_TUD_EXT.1 FCS_COP.1(2) FCS_COP.1(3)
System Monitoring O.SYSTEM_MONITORING	FAU_GEN.1 FAU_GEN.2 FAU_STG_EXT.1 FPT_STM.1
TOE Administration O.TOE_ADMINISTRATION O.DISPLAY_BANNER O.SESSION_LOCK	FIA_UIA_EXT.1 FIA_PMG_EXT.1 FIA_UAU_EXT.2 FIA_UAU.7 FMT_MTD.1 FMT_SMF.1 FTA_SSL_EXT.1 FTA_SSL.3 FTA_SSL.4
Residual Information Clearing O.RESIDUAL_INFORMATION_CLEARING	FDP_RIP.2
TSF Self Test O.TSF_SELF_TEST	FPT_TST_EXT.1

Table 6-4 – Rationale for TOE SFRs to Objectives from NDPP

OBJECTIVE	SFR
O.ADDRESS_FILTERING	FFW_RUL_EXT.1
O.PORT_FILTERING	FFW_RUL_EXT.1
O.STATEFUL_INSPECTION	FFW_RUL_EXT.1
O.RELATED_CONNECTION_FILTERING	FFW_RUL_EXT.1
O.SYSTEM_MONITORING	FAU_GEN.1 FFW_RUL_EXT.1
O.TOE_ADMINISTRATION	FMT_SMF.1

Table 6-5 – Rationale for TOE SFRs to Objectives from FWEP

6.4.3 Security Assurance Requirements

The assurance security requirements for this Security Target are from the NDPP and fWEP. The assurance components are summarized in the following table:

CLASS HEADING	CLASS_FAMILY	DESCRIPTION
ADV: Development	ADV_FSP.1	Basic Functional Specification
AGD: Guidance Documents	AGD_OPE.1	Operational User Guidance
	AGD_PRE.1	Preparative Procedures
ALC: Lifecycle Support	ALC_CMC.1	Labeling of the TOE
	ALC_CMS.1	TOE CM coverage
ATE: Tests	ATE_IND.1	Independent Testing - Sample
AVA: Vulnerability Assessment	AVA_VAN.1	Vulnerability Analysis

Table 6-6 – Security Assurance Requirements

Detailed assurance activities are described in NDPP Section 4.2 and FWEP Section 4.2 and 4.3.

6.4.4 Security Assurance Requirements Rationale

The ST specifies assurance activities specified in the NDPP and FWEP.

6.4.5 Security Assurance Requirements Evidence

This section identifies the measures applied to satisfy CC assurance requirements. Note that in some cases.

SECURITY ASSURANCE REQUIREMENT	EVIDENCE TITLE
ADV_FSP.1 Basic functional specification	Functional Specification: Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms
AGD_OPE.1 Operational User Guidance AGD_PRE.1 Preparative Procedures	Operational User Guidance and Preparative Procedures Supplement: Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms
ALC_CMC.1 Labeling of the TOE ALC_CMS.1 TOE CM Coverage	Configuration Management Processes and Procedures: Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms
ATE_IND.1 Independent Testing	Provided by Evaluation Lab
AVA_VAN.1 Vulnerability Analysis	Vulnerability Analysis: Juniper Networks, Inc. JUNOS 12.1 X44 D15.5 for SRX Series Platforms

Table 6-7 – Security Assurance Rationale and Measures

7 TOE Summary Specification

This section presents the Security Functions implemented by the TOE.

7.1 TOE Security Functions

The security functions performed by the TOE are as follows:

- Security Audit
- Cryptographic Support
- User Data Protection
- Identification and Authentication
- Security Management
- Protection of the TSF
- TOE Access
- Trusted Path/Channel
- Stateful Firewall (FWEP)

7.2 Security Audit

JUNOS creates and stores audit records which contain the date and time of the event, type of event, subject (user) identity and the outcome of the event for the following events (the detail of content recorded for each audit event is detailed in Table 6-2 and 6-3): :

- a) Start-up and shutdown of the audit function;
- b) Configuration is committed;
- c) Configuration is changed;
- d) All use of the identification and authentication mechanisms;
- e) Service requests;
- f) Failure to establish an SSH session establishment/termination of an SSH session;
- g) Changes to the time;
- h) Initiation of update;
- i) Indication that TSF self-test was completed;
- j) Termination of a remote session by the session locking mechanism;
- k) Termination of an interactive session;
- l) Initiation/termination/failure of the trusted channel functions.

Auditing is done using syslog. Syslog can be configured to store the audit logs locally, or to send them to one or more syslog log servers (via Netconf over SSH). Local audit log are stored in /var/log/. Only an authorized administrator can read log files, or delete log and archive files. The syslogs are automatically deleted locally according to configurable limits on storage volume.

The TOE defines an active log file and a number of “archive” files (10 by default, but configurable from 1

to 1000). When the active log file reaches its maximum size, the logging utility closes the file, compresses it, and names the compressed archive file 'logfile.0.gz'. The logging utility then opens and writes to a new active log file. When the new active log file reaches the configured maximum size, 'logfile.0.gz' is renamed 'logfile.1.gz', and the active log file is closed, compressed, and renamed 'logfile.0.gz' (see *Junos OS System Basics Configuration Guide* Chapter 9, Subsection 'Specifying Log File Size, Number, and Archiving Properties'). When the maximum number of archive files is reached and when the size of the active file reaches the configured maximum size, the contents of the oldest archived file are deleted so the current active file can be archived. For further details see *Junos OS System Basics Configuration Guide* Chapter 13, Subsection "archive (All System Log Files)".

The maximum value that can be specified for the size of a log file is 1GB. These default maximum sizes can be modified by the user, as detailed in *Junos OS System Basics Configuration Guide* Chapter 9, Subsection 'Specifying Log File Size, Number, and Archiving Properties'.

For more information about configuring event logging, see the *Junos OS System Basics Configuration Guide* and the *Junos OS Secure Configuration Guide for Common Criteria Network Device Protection Profile for Devices Running Junos OS 12.1*.

The Security Audit function is designed to satisfy the following security functional requirements:

- FAU_GEN.1
- FAU_GEN.2
- FAU_STG_EXT.1

7.3 Cryptographic Support

All FIPS-approved cryptographic functions implemented by the secure network appliance are implemented in the JUNOS FIPS cryptomodule. The TOE meets cryptographic requirements either by allowing the administrator to enable the FIPS operating mode or by running a FIPS image (per platform guidance). The evaluated configuration of the TOE requires the use of this FIPS operating mode. The Cryptographic security function is described in the context of how it satisfies the cryptographic security requirements.

The FIPS-approved cryptomodule implements RSA Digital Signature Standard using a base point of 2048-bits or greater (as specified by the cryptographic administrator) for digital signature generation and verification.

The TOE implements a timeout period for authentication for the SSHv2 protocol and provides a limit of three failed authentication attempts. The TOE uses public key-based SSH_RSA authentication methods and password-based authentication for SSHv2 .

Packets greater than 32768 bytes in an SSH transport connection are dropped and the connection is terminated by the TOE .

The TOE supports AES-CBC-128, AES_CBC 192 and AES-CBC-256 encryption algorithms for SSH transport and uses SSH-RSA as its public key algorithm.

The data integrity algorithms used in SSH transport connection are "hmac-sha1" as required by [RFC4253]

Key exchange is done using "diffie-hellman-group14-sha1" [RFC4253].

The TOE supports keyed hash message authentication using HMAC-SHA that meet FIPS Pub 198-1. The TOE supports cryptographic hashing via the SHA-1 algorithms provided it has a message digest size of either 160 bits.

The TOE handles zeroization for all CSP, plaintext secret and private cryptographic keys according to the table below. Zeroization is performed when then memory is called back for subsequent use, and is zeroized before it is re-used.

The TOE performs random number generation in accordance with [NIST Special Publication 800-90 using [HMAC_DRBG]]

CSP	Description	How Stored	Where Stored	Zeroization Method
SSH Private Host Key	The first time SSH is configured, the key is generated. Used to identify the host.	Plaintext	Disk	Overwritten three times, first with the byte pattern 0xff, then 0x00, and then 0xff again, before they are deleted
SSH Session Key	Session keys used with SSH, AES 128, 256, HMAC-SHA-1 key (160), DH Private Key 1024	Plaintext	Memory	Scrubbed in memory using OpenSSL scrubbing method overwriting the buffer with random data.
User Password	Plaintext value as entered by user	Hashed	Memory	Overwritten with zero's
RNG State	Internal state and seed key of RNG	Plaintext	Memory	Handled by kernel, overwritten with zero's

Table 7-1 - Key Zeroization Handling

See also 7.12 800-56 Conformance Statements for descriptions of RFC conformance.

The Cryptographic Support function is designed to satisfy the following security functional requirements:

- FCS_CKM.1
- FCS_CKM_EXT.4

- FCS_COP.1(1)
- FCS_COP.1(2)
- FCS_COP.1(3)
- FCS_COP.1(4)
- FCS_RBG_(EXT).1
- FCS_SSH_EXT.1

7.4 User Data Protection

The only resource made available to information flowing through a TOE is the temporary storage of packet information when access is requested and when information is being routed. User data is not persistent when resources are released by one user/process and allocated to another user/process. Temporary storage (memory) used to build network packets is erased when the resource is called into use by the next user/process. Junos knows, and keeps track of, the length of the packet. This means that when memory allocated from a previous user/process arrives to build the next network packet, Junos is aware of when the end of the packet is reached and pads a short packet with zeros accordingly.. Therefore, no residual information from packets in a previous information stream can traverse through the TOE.

The User Data Protection function is designed to satisfy the following security functional requirements:

- FDP_RIP.2

7.5 Identification and Authentication

The TSF enforces binding between human users and subjects. The Authorized Administrator is responsible for provisioning user accounts, and only the Authorized Administrator can do so. User accounts in the TOE have the following attributes: user identity (user name), authentication data (password) and role (privilege). The Authorized Administrator is associated with a defined login class, which is assigned “permissions all”. Locally stored authentication data for fixed password authentication. The password has a minimum length of 15¹ characters with at least two changes of character set (upper, lower, numeric, punctuation), and can be up to 20 ASCII characters in length (control characters are not recommended). Authentication data for public key-based authentication methods are stored in a directory owned by the user (and typically with the same name as the user). This directory contains the files '.ssh/authorized_keys' and '.ssh/authorized_keys2' which are used for SSH public key authentication.

The internal architecture supporting Authentication includes an active process, associated linked libraries and supporting configuration data. The Authentication process and library are

¹ By default the minimum password length is 10, but this should be set to minimum length of 15 in the evaluated configuration using the command: set system login password minimum-length 15

- login()
- PAM Library module

Following TOE initialization, a 'login' process is listening for a connection at the local console. This 'login' process can be accessed through either direct connection to the local console or following successful establishment of a remote management connection over SSH (as detailed in Section 6.8), when a login prompt is displayed.

This login process identifies and authenticates the user using PAM operations. The TOE provides obscured feedback during the authentication process.

The login process does two things; it first establishes that the requesting user is whom they claim to be and second provides them with an interactive Junos Command interactive command line interface (CLI).

The SSH daemon supports public key authentication by looking up a public key in an authorized keys file located in the directory '.ssh' in the user's home directory (ie '~/.ssh/') and this authentication method will be attempted before any other if the client has a key available. The SSH daemon will ignore the authorized keys file if it or the directory '.ssh' or the user's home directory are not owned by the user or are writeable by anyone else.

For password authentication, login() interacts with a user to request a username and password to establish and verify the user's identity. The username entered by the administrator at the username prompt is reflected to the screen, but no feedback to screen is provided while the entry made by the administrator at the password prompt until the Enter key is pressed. Login uses PAM Library calls for the actual verification of this data. PAM is used in the TOE support authentication management, account management, session management and password management. Login primarily uses the session management and password management functionality offered by PAM.

Following authentication, login launches the CLI using an exec()² system call. Such an invocation, results in the main() function for the CLI to be invoked.

The TOE requires users to provide unique identification and authentication data (passwords/public keys) before any access to the system is granted. A password is configured for each user allowed to log into the secure router. The TOE successfully authenticates if the authentication data provided matches that stored in conjunction with the provided identity.

The Identification and Authentication function is designed to satisfy the following security functional requirements:

- FIA_PMG_EXT.1
- FIA_UIA_EXT.1
- FIA_UAU_EXT.2
- FIA_UAU.7

² Any of the exec family of system calls may be used.

7.6 Security Management

There is only one user role defined for the TOE: Authorized Administrator. Because only Authorized Administrator users can be defined on the TOE, non-administrator users can have no access to TOE management functions. The Authorized Administrator is responsible for provisioning user accounts. User accounts in the TOE have the following attributes: user identity (user name), authentication data (password/public key) and role (privilege). Locally stored authentication data for fixed password authentication is a case-sensitive, alphanumeric value. Public keys are stored in '.ssh' files in the user's home directory (ie '~/.ssh/').

The TOE provides user access either through the system console or remotely over the Trusted Path using the SSHv2 protocol. Users are required to provide unique identification and authentication data (passwords/public keys) before any access to the system is granted. Prior to authentication, the Authorized Administrator only has access to the login screen. A password is configured for each user allowed to log into the secure router. Password information is stored as hashed data (using hmac-sha1) in the authentication database and public keys are stored in plaintext in '.ssh' files in the user's home directory (ie '~/.ssh/'). The TOE successfully authenticates if the authentication data provided matches that stored in conjunction with the provided identity.

The Authorized Administrator has the capability to:

- Modify cryptographic security data (import of certificates for the establishment of SSH sessions) and date/time
- Restrict the service available to unidentified or unauthenticated IT entities
- Restrict TOE (release) updates³

Detailed topics on the secure management of Juniper's routers & switches are discussed in the *Junos OS System Basics Configuration Guide* and the *Junos OS Secure Configuration Guide for Common Criteria Network Device Protection Profile for Devices Running Junos OS 12.1*.

The Security Management function is designed to satisfy the following security functional requirements:

- FMT_MTD.1
- FMT_SMF.1
- FMT_SMR.2

7.7 Protection of the TSF

The clock function of the TOE provides a source of date and time information for the appliance, used in audit timestamps. The clock function is reliant on the system clock provided by the underlying hardware. In addition, for each user session the TOE maintains a count of clock cycles (provided by the system clock) since last activity. The count is reset each time there is activity related to the user session.

³ Patch updates are not included in the scope of the evaluation, only complete release updates are supported.

When the counter reaches the number of clock cycles equating to the configured period of inactivity the user session is locked out.

Authorized administrators are able to query the current version of the TOE firmware/software. Junos does not provide partial updates for the TOE. Customers requiring updates must migrate to a subsequent release.

The kernel maintains a set of fingerprints (SHA1 digests) for executable files and other files which should be immutable. No executable can be run or shared object loaded unless the fingerprint is correct. The fingerprints are loaded as the filesystems are mounted, from digitally signed manifests. The manifest file is signed using the Juniper engineering private key, and is verified by the TOE using the Juniper engineering public key (stored on the TOE filesystem in clear, protected by filesystem access rights).

The fingerprint loader will only process a manifest for which it can verify the signature. Thus without a valid digital signature an executable cannot be run. When the command is issued to install an update (e.g. request system software add jinstall), the manifest file for the update is verified and stored, and each executable/immutable file is verified before it is executed. If any of the fingerprints in an update are not correctly verified, the TOE rolls back to the last known verified image.

The TOE will run the following set of self tests during power on to check the correct operation of the TOE.

- Power on test – determines the boot-device responds, and performs a memory size check to confirm the amount of available memory.
- File integrity test – verifies integrity of all mounted signed packages, to assert that system files have not been tampered with.
- Authentication error – verifies that veriexec is enabled and operates as expected using /opt/sbin/kats/cannot-exec.real.

Juniper Networks routing platforms run only binaries supplied by Juniper Networks. Each JUNOS software image includes a digitally signed manifest of executables that are registered with the system only if the signature can be validated. JUNOS software will not execute any binary without a registered signature. This feature protects the system against unauthorized software and activity that might compromise the integrity of your router.

JUNOS-FIPS and JUNOS 7.5+ use veri-exec digital signatures (veriexec from NetBSD) to allow the kernel to only execute binaries for which it has a matching SHA1 fingerprint manifests. In JUNOS these fingerprints are loaded from a digitally signed manifest, and the loader will only do so if it can verify the signature. JUNOS uses a standard RSA encrypted SHA1 digest for its signatures.

The power on self-tests may produce some or all of the output shown in the figure below:

```
Starting Memory POST...
Checking datalines... OK
Checking address lines... OK
Checking 512K memory for U-Boot... OK.
Running U-Boot CRC Test... OK.
Flash: 4 MB
USB: scanning bus for devices...
Root Hub 0: 4 USB Device(s) found
Root Hub 1: 1 USB Device(s) found
    scanning bus for storage devices... 2 Storage Device(s) found
Clearing DRAM..... done
BIST check passed.
1:00:00.0 Vendor/Device ID = 0x811210b5
1:01:07.0 Vendor/Device ID = 0xc72414e4
Net: octeth0
POST Passed
```

Figure 2 - Self Test Example

Junos OS is designed to fail securely. In the event of a transiently corrupt state or failure condition, the system will panic; the event will be logged and the system restarted, having ceased to process network traffic. When the system restarts, the system boot process does not succeed without passing all self-tests for cryptographic algorithms, RNG tests, and software integrity tests. This automatic recovery and self-test behavior, is discussed in Chapter 7 of the *Junos OS Secure Configuration Guide for Common Criteria Network Device Protection Profile for Devices Running Junos OS 12.1*.

The TOE does not provide a CLI interface to permit the viewing of keys. Cryptographic keys are protected through the enforcement of kernel-level file access rights, limiting access to the contents of cryptographic key containers to processes with cryptographic rights. Authentication data for public key-based authentication methods are stored in a directory owned by the user (and typically with the same name as the user). This directory contains the files `'.ssh/authorized_keys'` and `'.ssh/authorized_keys2'` which are used for SSH public key authentication.

The Protection of the TSF function is designed to satisfy the following security functional requirements:

- FPT_SKP_EXT.1
- FPT_APW_EXT.1
- FPT_STM.1
- FPT_TUD_(EXT).1
- FPT_TST_EXT.1

7.8 TOE Access

JUNOS enables Authorized Administrators to configure an access banner provided with the authentication prompt. The banner can provide warnings against unauthorized access to the secure router as well as any other information that the Authorized Administrator wishes to communicate.

Authorized Administrators have local and remote access capabilities.

The following example shows how to configure user access for the **operator-round-the-clock-access** login class from Monday through Friday without any restriction on access time or duration of login:

```
[edit system]
login {
  class operator-round-the-clock-access {
    allowed-days [ monday tuesday wednesday thursday friday ];
  }
}
```

The following example shows how to configure user access for the **operator-day-shift** login class on Monday, Wednesday, and Friday from 8:30 AM to 4:30 PM:

```
[edit system]
login {
  class operator-day-shift {
    allowed-days [ monday wednesday friday ];
    access-start 0830;
    access-end 1630;
  }
}
```

Alternatively, you can also specify the login start time and end time for the **operator-day-shift** login class to be from 8:30 AM to 4:30 PM in the following format:

```
[edit system]
login {
  class operator-day-shift {
    allowed-days [ monday wednesday friday ];
    access-start 08:30am;
    access-end 04:30pm;
  }
}
```

The following example shows how to configure user access for the **operator-day-shift-all-days-of-the-week** login class to be on all days of the week from 8:30 AM to 4:30 PM:

```
[edit system]
login {
  class operator-day-shift-all-days-of-the-week {
    access-start 0830;
    access-end 1630;
  }
}
```

Table 7-2 – Configuring Users With Access Restrictions

User sessions can be locked or terminated by users. The Authorized Administrator can set the TOE so that a user session is terminated after a period of inactivity.

The TSF overwrites the display device and makes the current contents unreadable after the local interactive session is terminated due to inactivity, thus disabling any further interaction with the TOE. This mechanism is the inactivity timer for administrative sessions. The Authorized Administrator can configure this inactivity timer on administrative sessions after which the session will be logged out.

The local administrative user can logout of existing session by typing `logout` to exit the CLI admin session and the TSF makes the current contents unreadable after the admin initiates the locking and no user activity can take place until the user re-identifies and authenticates.

The TOE Access function is designed to satisfy the following security functional requirements:

- FTA_SSL_EXT.1
- FTA_SSL.3
- FTA_SSL.4
- FTA_TAB.1

7.9 Trusted Path/Channels

The TOE supports and enforces Trusted Channels that protect the communications between the TOE and remote audit server from unauthorized disclosure or modification using SSH. It also supports Trusted Paths between itself and remote administrators so that the contents of administrative sessions are protected against unauthorized disclosure or modification.

The TOE achieves Trusted Paths by use of the SSHv2 protocol which ensures the confidentiality and integrity of user sessions. The encrypted communication path between the TSF and a remote administrator is provided by the use of an SSH session. Remote administrators of the TSF initiate communication with the TSF through the SSH tunnel created by the SSH session. Assured identification is guaranteed by using public key certificate based authentication for SSH. The SSHv2 protocol ensures that the data transmitted over a SSH session cannot be disclosed or altered by using the encryption and integrity mechanisms of the protocol with the FIPS cryptographic module.

The Trusted Path/Channels function is designed to satisfy the following security functional requirements:

- FTP_ITC.1
- FTP_TRP.1

7.10 Stateful Traffic Filtering (FWEP)

The boot sequence of the TOE appliances also aids in establishing the securing domain and preventing tampering or bypass of security functionality. The following steps list the boot sequence for the TOE:

- BIOS hardware and memory checks

- Loading and initialization of the FreeBSD Kernel OS
- FIPS self-tests and firmware integrity tests are executed
- The init utility is started (mounts file systems, sets up network cards to communicate on the network, and generally starts all the processes that usually are run on a FreeBSD system at startup)
- Daemon programs such as Internet Service Daemon (INETD), Routing Protocol Daemon (RPD), Syslogd are started; Routing and forwarding tables are initialized
- Management Daemon (or MGD) is loaded, allowing access to management interface
- Physical interfaces are active

Once the interfaces are brought up, they will start to receive and send packets based on the current configuration (or not receive or send any packets if they have not been previously configured). Interfaces are brought up only after successful loading of kernel and Information Flow subsystems, and these interfaces cannot send or receive packets unless previously configured by an authorized administrator. Since the Management Daemon is not loaded until after the kernel and INETD are initialized, no modification to the security attributes can be made by a user or process other than via the management process. INETD is used to start SSHD which provides secure communication path for remote administrators to manage the TOE.

The trusted and untrusted network connection interfaces on the security appliance are not enabled until all of the components on the appliance are fully initialized; power-up tests are successful and ready to enforce the configured security policies. In this manner, the TOE ensures that administrators are appropriately authorized when they exercise management commands and any network traffic is always subject to the configured information flow policies.

The TOE is configured to associate network interfaces to IP subnets. Source IP addresses are then associated with the network interface.

JUNOS is composed of a number of separate executables, or daemons. If a failure occurs in the “flow” daemon causing it to halt, no packet processing will occur and no packets will be forwarded. A failure in another daemon will not prevent the flow daemon from enforcing the policy rule set.

The Information Flow subsystem is responsible for processing the arriving packets from the network to the TOE's network interface. Based on policy, interface and zone information, the packet flows through the various modules of the Information Flow subsystem. If a policy does not contain a NAT rule, the NAT module is bypassed. If a security risk is found in the packet. e.g. denial-of-service attacks, the packet is dropped and an event is logged. The packet does not continue to the next module for processing. If the packet is not dropped by a given module, the interrupt handling routine calls the function for the next relevant module.

The Information Flow subsystem consists of the following modules:

- IP Classification Module
- Attack Detection Module

- Session Lookup Module
- Security Policy Module
- Session Setup Module
- NAT Module
- Inetd Module
- Rdp Module

The IP Classification module retrieves information from packets received on the network interface device, classifies packets into several categories, saves classification information in packet processing context, and provides other modules with that information for assisting further processing.

The Attack Detection module provides inline attack detection such as IP Spoofing for the security appliance. This module monitors arriving traffic, performs predefined attack detection services (prevents attacks), and issues actions when an attack is found.

The Session Lookup module performs lookups in the session table which is used for all interfaces based on the information in incoming packets. Specifically, the lookup is based on the exact match of source IP address and port, destination IP address and port, protocol attributes (e.g., SYN, ACK, RST, and FIN), and egress/ingress zone. The input is passed to the module as a set of parameters from the Attack Detection module via a function call. The module returns matching wing if a match is found and 0 otherwise. Sessions are removed when terminated.

The Session Setup module is only available for packets that do not match current established sessions. It is activated after the Session Lookup module. If packet has a matched session, it will skip the session setup module and proceed to the Security Policy module, and other modules. Eventually if the packet is not destined for the TOE, the Network interface will pass the traffic out of the appliance.

The Security Policy module examines traffic passing through the TOE (via Session Setup module) and determines if the traffic can pass based on administrator-configured access policies. The Security Policy module is the core of the firewall and IDP functionalities in the TOE: It is the policy enforcement engine that fulfills the security requirements for the user. The Security Policy module will deny packets when there is no policy match unless another policy allows the traffic.

The Session Setup module performs the auditing of denied packets. If there is a policy to specifically deny traffic, traffic matching this deny policy is dropped and logged in traffic log. If there is no policy to deny traffic, traffic that does not match any policy is dropped and not logged. In either case, Session Setup module does not create any sessions for denied traffic. Sessions are created for allowed traffic.

NAT adds a level of security that is not provided in routing mode while preserving the use of Internet-routable IP addresses. When enabled, NAT translates two components in the header of an IP packet: the source or destination IP address and source or destination port number.

The INETD module provides internet services for the TOE. The module listens on designated ports used by internet services such as FTP. When a TCP or UDP packet arrives with a particular destination port number, inetd launches the appropriate server program (e.g., SSHD) to handle the connection.

The RPD (Routing Protocol Daemon) module provides the implementations and algorithms for the routing protocols and route calculations. The primary goal of the RPD is to create and maintain the Routing Information Base (RIB), which is a database of routing entries. Each routing entry consists of a destination address and some form of next hop information. RPD module maintains the internal routing table and properly distributes routes from the routing table to Kernel subsystem used for traffic forwarding at the Network interface.

The TOE performs stateful network traffic filtering on network packets using the following network traffic protocols and network fields conforming to the described RFCs:

PROTOCOL/RFC	FIELDS
Internet Control Message Protocol version 4 (ICMPv4) <ul style="list-style-type: none"> • RFC 792 (ICMPv4) 	<ul style="list-style-type: none"> • Type • Code
Internet Control Message Protocol version 6 (ICMPv6) <ul style="list-style-type: none"> • RFC 4443 (ICMPv6) 	<ul style="list-style-type: none"> • Type • Code
Internet Protocol (IPv4) <ul style="list-style-type: none"> • RFC 791 (IPv4) 	<ul style="list-style-type: none"> • Source address • Destination Address • Transport Layer Protocol
Internet Protocol version 6 (IPv6) <ul style="list-style-type: none"> • RFC 2460 (IPv6) 	<ul style="list-style-type: none"> • Source address • Destination Address • Transport Layer Protocol
Transmission Control Protocol (TCP) <ul style="list-style-type: none"> • RFC 793 (TCP) 	<ul style="list-style-type: none"> • Source port • Destination port
User Datagram Protocol (UDP) <ul style="list-style-type: none"> • RFC 768 (UDP) 	<ul style="list-style-type: none"> • Source port • Destination port

Table 7-3 - Traffic filtering RFCs

The TOE shall allow permit, deny, and log operations to be associated with rules and these rules can be assigned to distinct network interfaces.

The TOE accepts network packets if it matches an established TCP, UDP or ICMP session using:

- TCP: source and destination addresses, source and destination ports, sequence number, flags
- UDP: source and destination addresses, source and destination ports
- ICMP: source and destination addresses, type, code, and list of matching attributes

The TOE will remove existing traffic flows due to session inactivity timeout, or completion of the session.

The TOE supports FTP (RFC 959) to dynamically establish sessions allowing network traffic according to Authorized Administrator rules. Session events will be logged in accordance with 'log' operations defined in the rules. Source and destination addresses, source and destination ports, transport layer protocol, and TOE Interface are recorded in each log record.

JUNOS implements what is referred to as an Application Layer gateway (ALG) that inspects FTP traffic to determine the port number used for data sessions. The ALG permits data traffic for the duration of the session, closing the port when the session ends. In this context, “session” refers to the TCP data transfer connection, not the duration of the FTP control session. JUNOS implements ALGs for a number of protocols.

The TSF shall enforce the following default reject rules with logging on all network traffic:

- invalid fragments;
- fragmented IP packets which cannot be re-assembled completely;
- where the source address is equal to the address of the network interface where the network packet was received;
- where the source address does not belong to the networks associated with the network interface where the network packet was received;
- where the source address is defined as being on a broadcast network;
- where the source address is defined as being on a multicast network;
- where the source address is defined as being a loopback address;
- where the source address is a multicast;
- packets where the source or destination address is a link-local address;
- where the source or destination address is defined as being an address “reserved for future use” as specified in RFC 5735 for IPv4;
- where the source or destination address is defined as an “unspecified address” or an address “reserved for future definition and use” as specified in RFC 3513 for IPv6;
- with the IP options: Loose Source Routing, Strict Source Routing, or Record Route specified;

The Stateful Traffic Filtering function is designed to satisfy the following security functional requirements:

- FFW_RUL_EXT.1

7.11 RFC Conformance Statements

This section identifies, for the critical RFCs applied in the implementation of SSH, the options supported by the TOE.

RFC	RFC synopsis	TOE Handling of Security-Related Protocol Options
RFC 4251	The Secure Shell (SSH) Protocol Architecture	<p>Host Keys: The TOE has one RSA, one DSA, and one ECDSA Host Key for SSH v2, which are generated on initial setup of the TOE. Any of them can be deconfigured via the CLI and the relevant key will be deleted and thus unavailable during connection establishment. These keys are randomly generated to be unique to each TOE instance. The TOE presents the client with its public key and the client matches this key against its known_hosts list of keys. When a client connects to the TOE, the client will be able to determine if the same host key was used in previous connections, or if the key is different (per the SSHv2 protocol).</p> <p>Policy Issues: The TOE implements all mandatory algorithms and methods. The TOE can be configured to accept public-key based authentication and/or password-based authentication. The TOE does not require multiple authentication for users. The TOE allows port forwarding and sessions to clients. The TOE has no X11 libraries or applications and X11 forwarding is prohibited.</p> <p>Confidentiality: The TOE does not accept the “none” cipher. For ciphers whose blocksize ≥ 16, the TOE rekeys every 2^{32} blocks have been sent/received. For other ciphers, the TOE rekeys connections, after 2^{27} blocks have been sent/received. (Rekeying can also be triggered by sending $2^{31} + 1$ packets, rather than blocks.) The client may explicitly request a rekeying event as a valid SSHv2 message at any time and the TOE will honor this request.</p> <p>Denial of Service: When the SSH connection is brought down, the TOE does not attempt to re-establish it. The TOE can be configured with ACLs to control the clients that are able to connect to it via SSH.</p> <p>Ordering of Key Exchange Methods: The TOE orders key exchange algorithms as follows: ecdh-sha2-nistp256, ecdh-sha2-nistp384, ecdh-sha2-nistp521, diffie-hellman-group-exchange-sha256, diffie-hellman-group-exchange-sha1, diffie-hellman-group14-sha1, diffie-hellman-group1-sha1.</p> <p>Debug Messages: The TOE sshd server does not support debug messages via the CLI.</p> <p>End Point Security: The TOE permits port forwarding.</p> <p>Proxy Forwarding: The TOE permits proxy forwarding.</p> <p>X11 Forwarding: The TOE does not support X11 forwarding.</p>

RFC	RFC synopsis	TOE Handling of Security-Related Protocol Options
RFC 4252	The Secure Shell (SSH) Authentication Protocol	<p>Authentication Protocol: The TOE does not accept the “none” authentication method. The TOE disconnects a client after 30 seconds if authentication has not been completed. The TOE also allows authentication retries of three times before sending a disconnect to the client.</p> <p>Authentication Requests: The TOE does not accept authentication if the requested service does not exist. The TOE does not allow authentication requests for a non-existent username to succeed – it sends back a disconnect as it would for failed authentications and hence does not allow enumeration of valid usernames. The TOE denies “none” authentication method and replies with a list of permitted authentication methods.</p> <p>Public Key Authentication Method: The TOE supports public key authentication. Authentication succeeds if the correct private key is used. The TOE does not require multiple authentications (public key and password) for users.</p> <p>Password Authentication Method: The TOE supports password authentication. Expired password are not supported and cannot be used for authentication.</p> <p>Host-Based Authentication: The TOE does not support the configuration of host-based authentication methods.</p>
RFC 4253	The Secure Shell (SSH) Transport Layer Protocol	<p>Encryption: The TOE offers the following for encryption of SSH sessions: aes128-ctr, aes192-ctr, aes256-ctr, aes128-cbc, aes192-cbc, aes256-cbc, and 3des-cbc⁴. The TOE permits negotiation of encryption algorithms in each direction. The TOE does not allow the “none” algorithm for encryption.</p> <p>Data Integrity: The TOE permits negotiation of MAC algorithms in each direction.</p> <p>Key Re-Exchange: The TOE performs a re-exchange when SSH_MSG_KEXINIT is received.</p>

⁴ Others are supported by default, but these are the encryption algorithms the Secure Configuration Guide specifies are to be configured in the evaluated configuration.

RFC	RFC synopsis	TOE Handling of Security-Related Protocol Options
RFC 4254	Secure Shell (SSH) Connection Protocol	<p>Multiple channels: The TOE assigns each channel a number (as detailed in RFC 4251, see above).</p> <p>Data transfers: The TOE supports a maximum window size of 32768 bytes for data transfer.</p> <p>Interactive sessions: The TOE only supports interactive sessions that do NOT involve X11 forwarding.</p> <p>Forwarded X11 connections: This is not supported in the TOE.</p> <p>Environment variable passing: The TOE only sets variables once the server process has dropped privileges.</p> <p>Starting shells/commands: The TOE supports starting one of shell, application program or command (only one request per channel). These will be run in the context of a channel, and will not halt the execution of the protocol stack.</p> <p>Window dimension change notices: The TOE will accept notifications of changes to the terminal size (dimensions) from the client.</p> <p>Port forwarding : This is fully supported by the TOE.</p>

Table 7-4 – RFC Conformance Statements

The RFC conformance statements support the satisfaction of FCS_SSH_EXT.1.

7.12 800-56 Conformance Statements

The following sections detail all sections of the 800-56A standard the TOE complies with for generation of asymmetric cryptographic keys (as claimed in FCS_CKM.1). The relevant sections of 800-56A are section 5.5 “Domain Parameters” and section 5.6 “Private and Public Keys”.

All “SHALL” statements within the listed sections are implemented in the TOE and all “SHALL NOT” statements are adhered to within the TOE and the described functionality/behavior is not present. The implemented option associated with each “SHOULD” and “SHOULD NOT” statement in a referenced section is detailed.

There are no TOE specific extensions relating to cryptographic key generation that are not included in this standard.

7.12.1 Finite Field-Based Key Establishment Schemes

The requirements for Finite Field-Based Key Establishment Schemes are specified in 800-56A:

800-56A section	800-56A sub section	Compliance
5.5 Domain Parameters	General	Comply with all “shall” statements.

800-56A section	800-56A sub section	Compliance
5.5.1 Domain Parameter Generation	5.5.1.1 FFC Domain Parameter Generation	Comply with all “shall” statements. The FFC parameter is set and so ECC is not used
	5.5.1.2 ECC Domain Parameter Generation	n/a – Elliptic Curve Cryptography is not used.
5.6 Private and Public Keys	General	No statements
5.6.1 Private/Public Key Pair Generation	5.6.1.1 FFC Key Pair Generation	Comply with all “shall” statements. Only static public keys used.
	5.6.1.2 ECC Key Pair Generation	n/a – Elliptic Curve Cryptography is not used.
5.6.2 Assurances of the Arithmetic Validity of a Public Key	General	Comply with all “shall” statements. The TOE will determine and explicitly reflect whether or not key establishment is allowed based upon the method(s) of assurance that was used.
	5.6.2.1 Owner Assurances of Static Public Key Validity	Owner Full Validation - The owner performs a successful full public key validation, via pair-wise consistency check
	5.6.2.2 Recipient Assurances of Static Public Key Validity	TTP Generation – The recipient receives assurance that a trusted third party (trusted by the recipient) has generated the public/private key pair in accordance with Section 5.6.1 and has provided the key pair to the owner.
	5.6.2.3 Recipient Assurances of Ephemeral Public Key Validity	Recipient Full Validation - The recipient performs a successful full public key Validation.
	5.6.2.4 FFC Full Public Key Validation Routine	Comply with “shall” statement.

800-56A section	800-56A sub section	Compliance
	5.6.2.5 ECC Full Public Key Validation Routine	n/a – Elliptic Curve not used.
	5.6.2.6 ECC Partial Public Key Validation Routine	n/a – Elliptic Curve not used.
5.6.3 Assurances of the Possession of a Static Private Key	General	Comply with “shall” statement.
	5.6.3.1 Owner Assurances of Possession of a Static Private Key	Owner Receives Assurance via Key Generation - The act of generating a key pair.
5.6.3.2 Recipient Assurance of Owner’s Possession of a Static Private Key	General	Comply with all “shall” statements.
	5.6.3.2.1 Recipient Obtains Assurance through a Trusted Third Party	The TOE will be made aware of the method(s) used by the third party.
	5.6.3.2.2 Recipient Obtains Assurance Directly from the Claimed Owner	The underlying key agreement used by the TOE is “dhOneFlow or (Cofactor) One-Pass Diffie-Hellman”. Comply with all “shall” statements.
5.6.4 Key Pair Management	5.6.4.1 Common Requirements on Static and Ephemeral Key Pairs	Comply with all “shall” statements and the “shall not” statement.
	5.6.4.2 Specific Requirements on Static Key Pairs	Comply with all “shall” statements and the “shall not” statement. In item #3 – The TOE will determine whether or not key establishment is allowed based upon the method(s) of assurance that was used.

800-56A section	800-56A sub section	Compliance
	5.6.4.3 Specific Requirements on Ephemeral Key Pairs	<p>Comply with all “shall” statements.</p> <p>In item #2 – The TOE will generate an ephemeral key pair just before the ephemeral public key is transmitted.</p> <p>In item #3 – The TOE will determine whether or not to key establishment is allowed based upon the method(s) of assurance that was used.</p>

Table 7-5 – 800-56A Conformance Statements

7.12.2 Elliptic Curve Cryptography-Based Schemes (ECC Scheme)

Elliptic curve is not implemented in the TOE.