## **National Information Assurance Partnership**



## Common Criteria Evaluation and Validation Scheme Validation Report

**Gigamon GigaVUE Version 6.5** 

Report Number: CCEVS-VR-VID11487-2024

Dated: November 22, 2024

Version: 1.0

National Institute of Standards and Technology Information Technology Laboratory 100 Bureau Drive Gaithersburg, MD 20899 Department of Defense ATTN: NIAP, Suite 6982 9800 Savage Road Fort Meade, MD 20755-6982

#### **ACKNOWLEDGEMENTS**

## **Validation Team**

Jerome Myers, Senior Validator - Aerospace Corporation Farid Ahmed, Lead Validator - Johns Hopkins University Applied Physics Lab. Michael Smeltzer, Lead Validator (Trainee) - Johns Hopkins University Applied Physics Lab.

#### **Common Criteria Testing Laboratory**

Herbert Markle, CCTL Technical Director Evan Seiz Rachel Kovach Booz Allen Hamilton (BAH) Laurel, Maryland

# **Table of Contents**

1	EXECUTIVE SUMMARY	4
2	IDENTIFICATION	6
3	ASSUMPTIONS AND CLARIFICATION OF SCOPE	7
4	ARCHITECTURAL INFORMATION	10
5	SECURITY POLICY	13
6	DOCUMENTATION	16
7	EVALUATED CONFIGURATION	17
8	IT PRODUCT TESTING	
9	RESULTS OF THE EVALUATION	24
10	VALIDATOR COMMENTS	
11	ANNEXES	27
12	SECURITY TARGET	
13	LIST OF ACRONYMS	29
14	TERMINOLOGY	30
15	BIBLIOGRAPHY	31

## 1 Executive Summary

This report documents the assessment of the National Information Assurance Partnership (NIAP) validation team of the evaluation of Gigamon GigaVUE Visibility Appliances provided by Gigamon, Inc. It presents the evaluation results, their justifications, and the conformance results. This Validation Report is not an endorsement of the Target of Evaluation by any agency of the U.S. government, and no warranty is either expressed or implied.

The evaluation was performed by the Booz Allen Hamilton Inc. Common Criteria Testing Laboratory (CCTL) in Laurel, Maryland, United States of America, and was completed in November 2024. The information in this report is largely derived from the evaluation sensitive Evaluation Technical Report (ETR) and associated test reports, all written by Booz Allen. The evaluation determined that the product is both Common Criteria Part 2 Extended and Part 3 Conformant and meets the assurance requirements set forth in the *collaborative Protection Profile for Network Devices Version 2.2e* (NDcPP).

The Gigamon GigaVUE Visibility Appliances (also known as GigaVUE) Version 6.5 are network devices that include hardware and software. The GigaVUE's primary functionality is to use the Gigamon Forwarding Policy to receive out-of-band (data plane) copied network data from external sources (TAP or SPAN port) and forward that copied network data to one or many tool ports for packet capture or analyzing tools based on user selected criteria. GigaVUE is made up of the following three model types:

- The GigaVUE HC Series enables greater network traffic visibility into data in motion, minimizes traffic overloads and provides options for deploying both inline and outof-band security and monitoring tools
- The GigaVUE® TA Series of edge network packet brokers are designed to aggregate
  multiple network links and feed the combined traffic either to GigaVUE HC Series
  products, or directly to security and monitoring tools, or both.
- The GigaTAP<sup>TM</sup> (GTAP) A Series is a line of network TAPs designed with intelligent management capabilities that monitor link states of connected devices and the power state of all sources of power to minimize link downtime on network.

All the GigaVUE models can fulfill the NDcPP2E security requirements individually. Therefore, the evaluated configuration consists of the TOE as a standalone device and is not deployed as a distributed manner.

The TOE identified in this Validation Report has been evaluated at a NIAP approved Common Criteria Testing Laboratory using the Common Methodology for IT Security Evaluation (Version 3.1, Rev 5) for conformance to the Common Criteria for IT Security Evaluation (Version 3.1, Rev 5), as interpreted by the Assurance Activities contained in the NDcPP. This Validation Report applies only to the specific version of the TOE as evaluated. The evaluation has been conducted in accordance with the provisions of the NIAP Common Criteria Evaluation and Validation Scheme and the conclusions of the testing laboratory in the evaluation technical report is consistent with the evidence provided.

The validation team provided guidance on technical issues and evaluation processes and reviewed the individual work units of the ETR for the NDcPP Assurance Activities. The validation team found that the evaluation showed that the product satisfies all of the functional requirements and assurance requirements stated in the Security Target (ST). Therefore, the validation team concludes that the testing laboratory's findings are accurate, the conclusions justified, and the

conformance results are correct. The conclusions of the testing laboratory in the evaluation technical report are consistent with the evidence produced.

The technical information included in this report was obtained from the *Gigamon GigaVUE Version 6.5 Security Target v1.0*, dated September 30, 2024, and analysis performed by the Validation Team.

## 2 Identification

The CCEVS is a joint National Security Agency (NSA) and National Institute of Standards effort to establish commercial facilities to perform trusted product evaluations. Under this program, security evaluations are conducted by commercial testing laboratories called Common Criteria Testing Laboratories (CCTLs). CCTLs evaluate products against Protection Profile containing Assurance Activities, which are interpretation of CEM work units specific to the technology described by the PP.

The NIAP Validation Body assigns Validators to monitor the CCTLs to ensure quality and consistency across evaluations. Developers of information technology products desiring a security evaluation contract with a CCTL and pay a fee for their product's evaluation. Upon successful completion of the evaluation, the product is added to NIAP's Product Compliant List.

Table 1 provides information needed to completely identify the product, including:

- The Target of Evaluation (TOE): the fully qualified identifier of the product as evaluated.
- The Security Target (ST), describing the security features, claims, and assurances of the product.
- The conformance result of the evaluation.
- The Protection Profile to which the product is conformant.
- The organizations and individuals participating in the evaluation.

Table 1 – Evaluation Identifiers

Item	Identifier
Evaluation	United States NIAP Common Criteria Evaluation and Validation
Scheme	Scheme
TOE	Gigamon GigaVUE Visibility appliance, running the Gigamon
	GigaVUE software Version 6.5
	Refer to Tables 2, 3, and 4 for Model Specifications
Protection	collaborative Protection Profile for Network Devices, Version 2.2e,
Profile	27 March 2020, including all applicable NIAP Technical Decisions and Policy Letters
Security Target	Gigamon GigaVUE Version 6.5 Security Target v1.0, dated September 30, 2024
Evaluation	Evaluation Technical Report for a Target of Evaluation "Gigamon
Technical Report	GigaVUE Version 6.5" Evaluation Technical Report v1.0 dated
	November 15, 2024
CC Version	Common Criteria for Information Technology Security Evaluation,
	Version 3.1 Revision 5
Conformance Result	CC Part 2 extended, CC Part 3 conformant
Sponsor	Gigamon, Inc.
Developer	Gigamon, Inc.
Common Criteria	Booz Allen Hamilton, Laurel, Maryland
Testing Lab (CCTL)	
CCEVS Validators	Jerome Myers, Senior Validator - Aerospace Corporation
	Farid Ahmed, Lead Validator - Johns Hopkins University Applied Physics
	Laboratory
	Michael Smeltzer, Lead Validator (Trainee) - Johns Hopkins University
	Applied Physics Laboratory

## 3 Assumptions and Clarification of Scope

#### 3.1 Assumptions

The following assumptions about the operational environment are made regarding its ability to provide security functionality.

- It is assumed that the TOE is deployed in a physically secured operational environment and not subjected to any physical attacks.
- It is assumed that there are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE.
- The TOE is not responsible for protecting network traffic that is transmitted across its interfaces that is not related to any TOE management functionality or generated data.
- TOE Administrators are trusted to follow and apply all administrator guidance in a trusted manner.
- It is assumed that regular software and firmware updates will be applied by a TOE Administrator when made available by the product vendor.
- Administrator credentials are assumed to be secured from unauthorized disclosure.
- TOE Administrators are trusted to ensure that there is no unauthorized access possible for sensitive residual information on the TOE when it is removed from its operational environment.

#### 3.2 Threats

The following lists the threats addressed by the TOE.

- T.UNAUTHORIZED\_ADMINISTRATOR\_ACCESS Threat agents may attempt to gain Administrator access to the Network Device by nefarious means such as masquerading as an Administrator to the device, masquerading as the device to an Administrator, replaying an administrative session (in its entirety, or selected portions), or performing man-in-the-middle attacks, which would provide access to the administrative session, or sessions between Network Devices. Successfully gaining Administrator access allows malicious actions that compromise the security functionality of the device and the network on which it resides.
- T.WEAK\_CRYPTOGRAPHY Threat agents may exploit weak cryptographic algorithms or perform a cryptographic exhaust against the key space. Poorly chosen encryption algorithms, modes, and key sizes will allow attackers to compromise the algorithms, or brute force exhaust the key space and give them unauthorized access allowing them to read, manipulate and/or control the traffic with minimal effort.
- T.UNTRUSTED\_COMMUNICATION\_CHANNELS Threat agents may attempt to target Network Devices that do not use standardized secure tunnelling protocols to protect the critical network traffic. Attackers may take advantage of poorly designed protocols or poor key management to successfully perform man-in-the-middle attacks, replay attacks, etc. Successful attacks will result in loss of confidentiality and integrity of the critical network traffic, and potentially could lead to a compromise of the Network Device itself.
- T.WEAK\_AUTHENTICATION\_ENDPOINTS Threat agents may take advantage of secure protocols that use weak methods to authenticate the endpoints, e.g. a shared password that is guessable or transported as plaintext. The consequences are the same as a poorly designed protocol, the attacker could masquerade as the Administrator or another device, and the attacker could insert themselves into the network stream and perform a man-in-the-middle attack. The result is the critical

network traffic is exposed and there could be a loss of confidentiality and integrity, and potentially the Network Device itself could be compromised.

- T.UPDATE\_COMPROMISE Threat agents may attempt to provide a
  compromised update of the software or firmware which undermines the security
  functionality of the device. Non-validated updates or updates validated using nonsecure or weak cryptography leave the update firmware vulnerable to surreptitious
  alteration.
- T.UNDETECTED\_ACTIVITY Threat agents may attempt to access, change, and/or modify the security functionality of the Network Device without Administrator awareness. This could result in the attacker finding an avenue (e.g., misconfiguration, flaw in the product) to compromise the device and the Administrator would have no knowledge that the device has been compromised.
- T.SECURITY\_FUNCTIONALITY\_COMPROMISE Threat agents may compromise credentials and device data enabling continued access to the Network Device and its critical data. The compromise of credentials includes replacing existing credentials with an attacker's credentials, modifying existing credentials, or obtaining the Administrator or device credentials for use by the attacker.
- T.PASSWORD\_CRACKING Threat agents may be able to take advantage of
  weak administrative passwords to gain privileged access to the device. Having
  privileged access to the device provides the attacker unfettered access to the network
  traffic and may allow them to take advantage of any trust relationships with other
  Network Devices.
- T.SECURITY\_FUNCTIONALITY\_FAILURE An external, unauthorized entity
  could make use of failed or compromised security functionality and might therefore
  subsequently use or abuse security functions without prior authentication to access,
  change or modify device data, critical network traffic or security functionality of the
  device.

#### 3.3 Clarification of Scope

All evaluations (and all products) have limitations, as well as potential misconceptions that might benefit from additional clarification. This text covers some of the more important limitations and clarifications of this evaluation. Note that:

- As with any evaluation, this evaluation only shows that the evaluated configuration meets the security claims made, with a certain level of assurance. The level of assurance for this evaluation is defined within the *collaborative Protection Profile for Network Devices*, *Version 2.2e* 27 March 2020, including all relevant NIAP Technical Decisions. A subset of the "optional" and "selection-based" security requirements defined in the NDcPP are claimed by the TOE and documented in the ST.
- Consistent with the expectations of the Protection Profile, this evaluation did not specifically search for, nor seriously attempt to counter, vulnerabilities that were not "obvious" or vulnerabilities to security functionality not claimed in the ST. The CEM defines an "obvious" vulnerability as one that is easily exploited with a minimum of understanding of the TOE, technical sophistication and resources.
- The functionality evaluated is scoped exclusively to the security functional requirements specified in the Security Target. All other functionality provided by these devices, needs to be assessed separately and no further conclusions can be drawn about their effectiveness. In particular, the GigaVUE's network traffic capture, filter, and forwarding capabilities described in Section 1.3 of the Security Target were not assessed as part of

this evaluation. Further information of excluded functionality can be found in Section 2.3 of the Security Target.

The evaluated configuration of the TOE is the Gigamon GigaVUE appliance described in Table 1 running the Gigamon GigaVUE-OS software Version 6.5. In the evaluated configuration, the TOE uses SSH to secure remote command-line administration and TLS and SSH to secure transmissions of security-relevant data from the TOE to external entities such as an authentication server, syslog, and Gigamon Fabric Manager Server (separate product going through its own NDcPP evaluation). The TOE includes administrative guidance in order to instruct Security Administrators in the secure installation and operation of the TOE. Adherence to this guidance is sufficient to ensure that the TOE is operated in accordance with its evaluated configuration.

## 4 Architectural Information

Note: The following architectural description is based on the description presented in the Security Target.

#### 4.1 TOE Introduction

The TOE is a network device as defined in the NDcPP which states: "This is a Collaborative Protection Profile (cPP) whose Target of Evaluation (TOE) is a Network Device (ND)... A network device in the context of this cPP is a device connected to the network and has an infrastructure within the network". The TOE consists of the Gigamon GigaVUE model, running the Gigamon GigaVUE software Version 6.5. Thus, the TOE is a network device composed of hardware and software.

#### 4.2 Physical Boundary

The TOE is comprised of both software and hardware. The hardware is comprised of the following:

Property	НС3	HC1	HC1Plus	НСТ
Model/Part Number	GVS-HC3A1-HW (AC power) GVS-HC3A2-HW (DC power)	GVS-HC101-HW (AC power) GVS-HC102-HW (DC power)	GVS-HC1P1-HW (AC power) GVS-HC1P2-HW (DC power)	GVS-HCT01-HW (AC power)
Size	3RU	1RU	1RU	1RU
Processor	Intel Atom C2758 (Rangeley)	Intel Atom C2538 (Rangeley)	Intel Atom C3538 (Denverton)	Intel Atom C3538 (Denverton)
Fixed Ports	10/100/1000M RJ45 Mgmt. port Serial Console	10/100/1000M RJ45 Mgmt. port Serial Console 12 1G/10G Ports (QSFP) 4 10/100/1000M Ports	10/100/1000M RJ45 Mgmt. port Serial Console	2 40/100G QSFP28 ports. Mgmt. port Serial Console

**Table 2 – HC Series Properties** 

Property	TA25	TA25E	TA200	TA200E	TA400
Model/Part Number	GVS-TAX21-HW (AC power) • all ports	GVS-TAX21E- HW (AC power) GVS-TAX22E-	GVS-TAC21 (AC power) GVS-TAC22	GVS- TAC21E-HW (AC power)	GVS-TAC41- HW (AC power)
	enabled GVS-TAX22-HW (DC power)	HW (DC power)	(DC power)	GVS- TAC22E-HW (DC power)	GVS-TAC42- HW (DC power)
	• all ports enabled				
	GVS-TAX21A- HW (AC power)				
	• 24 10G/25G				

	ports enabled GVS-TAX22A- HW (DC power) 24 10G/25G ports enabled				
Size	1RU	1RU	2RU	2RU	1RU
Processor	Intel Atom C3538 (Denverton)	Intel Xeon D1518 (Broadwell)	Intel Xeon D1527 (Broadwell)	Intel Xeon D1518 (Broadwell)	Intel Atom C3538 (Denverton)
Fixed Ports	10/100/1000M Mgmt. port Serial Console 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages	10/100/1000M Mgmt. port Serial Console 48 25Gb/10Gb/1Gb 8 100Gb/40Gb	10/100/1000M Mgmt. port Serial Console 64 100G/40G ports	10/100/1000M Mgmt. port Serial Console 32 or 64 40G/100G QSFP28 cages	10/100/1000M Mgmt. port Serial Console 32 400Gb /100Gb/ 40Gb QSFP-DD/ QSFP28/QSFP+ ports

**Table 3 – TA Series Properties** 

Property	GTAP		
Model/Part Number	GTP-ATX21 (AC power)  GTP-ASF21 (AC power)		
Size	1RU	1RU	
Processor	Intel Atom C3338 (Denverton)	Intel Atom C3338 (Denverton)	
Fixed Ports	10/100/1000M Mgmt. port 4x 10/100/1000BASE-T links	10/100/1000M Mgmt. port 4x 1Gb/10Gb Copper or Fiber links	

**Table 4 – GTAP Series Properties** 

The TOE resides on a network and supports (in some cases optionally) the following hardware, software, and firmware in its environment:

Component	Definition	
Certification Authority	A server that acts as a trusted issuer of digital certificates and distributes a	
(CA)	CRL that identifies revoked certificates.	
	A system that is capable of receiving authentication requests using LDAP over	
LDAP Server	TLS and validating these requests against identity and credential data that is	
	defined in an LDAP directory.	
	Any general-purpose computer that is used by an administrator to manage the	
	TOE. The TOE can be managed remotely, in which case the management	
Management	workstation requires an SSH client to access the CLI, or locally, in which case	
Workstation	the management workstation must be physically connected to the TOE using	
	the serial port and must use a terminal emulator that is compatible with serial	
	communications.	
Audit Server	The audit server connects to the TOE and allows the TOE to send syslog	

messages to it for remote storage. This is used to send copies of audit data to
be stored in a remote location for data redundancy purposes.

**Table 5 – IT Environment Components** 

## 5 Security Policy

#### 5.1.1 Security Audit

Audit records are generated for various types of management activities and events. The audit records include the date and time stamp of the event, the event type and subject identity. In the evaluated configuration, the TSF is configured to transmit audit data to a remote audit server using SSHv2, but audit data is also stored locally to ensure availability of the data if communications with the audit server are unavailable. Local audit records are stored in "message" files which are rotated to ensure a maximum limit of disk usage is enforced. Only users with the Admin privilege can access or delete the log files. Users with the Admin privilege are considered trusted users and are therefore not expected to delete or modify the audit records.

#### 5.1.2 Cryptographic Support

The TOE uses sufficient security measures to protect its data in transmission by implementing cryptographic methods and trusted channels. The TOE uses SSH to secure the remote CLI and audit server trusted channels. The TOE uses TLS to secure the trusted channel for the LDAP server. The TOE uses HTTPS to secure the trusted channel from the Gigamon Fabric.

Cryptographic keys are generated using the CTR\_DRBG provided by this module. The TOE erases all plaintext secret and private keys that reside in both RAM and non-volatile storage with zeroes. In the evaluated configuration, the TOE operates in "Secure Cryptography Mode" which is used to restrict algorithms to meet the PP requirements.

The following table contains the CAVP algorithm certificates:

SFR(s) Supported	Algorithm(s) (cryptographic operation)	Standard	CAVP Algorithm List Name	CAVP Cert. #
FCS_CKM.1 Key Generation	ECDSA (P-256, P-384, P-521)	NIST FIPS 186-4	ECDSA	A4848
FCS_CKM.2 Key Establishment	Elliptic curve-based key establishment schemes	NIST SP 800-56A Rev3	KAS-SSC ECC / KAS-ECC CDH	A4849
FCS_COP.1/DataEncryption AES Encryption /Decryption	AES-CBC (128, 256 bits) AES-GCM (128, 256 bits)	ISO 10116 (CBC) ISO 19772 (GCM) ISO 18033-3 (AES)	AES	A4848
FCS_COP.1/SigGen Sig Generation /Verification	Elliptic Curve Digital Sig Algorithm (256 bits, NIST curve P-256, P-384, P-521)	ISO/IEC 14888-3, Section 6.4. (NIST FIPS 186- 4)	ECDSA	A4848
FCS_COP.1/Hash Cryptographic Hashing	SHA-256, SHA-384, SHA-512 Digest sizes 256, 384, 512	ISO/IEC 10118- 3:2004	SHS	A4848
FCS_COP.1/KeyedHash Keyed Hash Algorithm	HMAC-SHA-256, HMAC-384, HMAC-SHA512 Key Sizes 256, 512 bits Digest Sizes 256, 384, 512	ISO/IEC 9797- 2:2011, Section 7	НМАС	A4848

ECC DDC EVT 1	CTR_DRBG (AES-256) with 2	ISO/IEC		
FCS_RBG_EXT.1 Random Bit Generation	software-based noise sources with minimum of 256 bits of	18031:2011	DRBG	A4848
	entropy			

Table 6 – Cryptographic Algorithm Table

#### 5.1.3 Identification and Authentication

All users must be identified and authenticated to the TOE before being allowed to perform any actions on the TOE. This is true of users accessing the TOE via the local console or the protected path using the remote CLI via SSH. Users authenticate to the TOE using one of the following methods:

- Username/password (defined on the TOE)
- LDAP authentication
- Username/public key (SSH only)

The TSF provides a configurable number of maximum consecutive authentication failures that are permitted by a user. Once this number has been met, the account is locked for a configurable time interval. Passwords that are maintained by the TSF can be composed of upper case, lower case, numbers and special characters. The Security Administrator can define the minimum password length between 8 and 30 characters. Password information is never revealed during the authentication process including during login failures. Before a user authenticates to the device, a configurable warning banner is displayed.

As part of establishing trusted remote communications, the TOE provides X.509 certificate functionality. In addition to verifying the validity of certificates, the TSF can check their revocation status using a certificate revocation list (CRL). The TSF can also generate a Certificate Signing Request in order to obtain a signed certificate to install for its own use as a TLS server

#### 5.1.4 Security Management

The TOE defines two roles: Admin and Monitor. Each of these roles has varying levels of fixed privilege to interact with the TSF. The Admin role is able to perform all security-relevant management functionality (such as user management, password policy configuration, application of software updates, and configuration of cryptographic settings). The Monitor role provides view-only access to ports and configurations. Therefore, the term "Admin", used throughout this document, is considered to be a Security Administrator of the TSF. Management functions can be performed using the local console or remote CLI. All software updates to the TOE are performed manually.

#### 5.1.5 Protection of the TSF

The TOE stores usernames and passwords in a password file that cannot be viewed by any user on the TOE regardless of the user's role. The passwords are hashed using SHA-512. Public keys are stored in the configuration database which is integrity checked at boot time. Key data is stored in plaintext on the hard drive but cannot be accessed by any user. The TOE has an underlying hardware clock that is used for keeping time. The time can be manually set by the administrator. Power-on self-tests are executed automatically when the cryptographic module is loaded into memory. All binaries (e.g., executables, libraries), are located on a read-only partition and cannot be modified. In addition, the TOE has a configuration database that is integrity checked at boot time.

The version of the TOE (both the currently executing version and the installed/updated version, if different) can be verified from any of the administrative interfaces provided by the TSF. The updated image is verified via a digital signature.

#### 5.1.6 TOE Access

The TOE can terminate inactive local console or remote CLI sessions after a specified time period. The default setting is 15 minutes. Users can also terminate their own interactive sessions. Once a session has been terminated, the TOE requires the user to re-authenticate to establish a new session. The TOE displays an administratively configured banner on the local console and remote CLI prior to allowing any administrative access to the TOE.

#### 5.1.7 Trusted Path/Channels

The TOE connects and sends data to IT entities that reside in the Operational Environment via trusted channels. In the evaluated configuration, the TOE connects with an audit server using SSH to encrypt the audit data that traverses the channel. The TOE also connects with an LDAP server using TLS. When accessing the TOE remotely, administrators interface with the TSF using a trusted path. The remote CLI is protected via SSH.

#### 6 Documentation

The vendor provided the following guidance documentation in support of the evaluation:

- Gigamon GigaVUE Version 6.5 Supplemental Administrative Guidance for Common Criteria- v1.0
- GigaVUE-OS CLI Reference Guide, GigaVUE-OS, Product Version 6.5, Document Version 1.0
- GigaVUE-HC1 Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- GigaVUE-HC1-Plus Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- GigaVUE-HC3 Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- GigaVUE-HCT Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- GigaVUE TA25 Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- GigaVUE TA25E Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- GigaVUE TA200 Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- GigaVUE TA200E Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5,
   Document Version 1.0
- GigaVUE TA400 Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- GigaVUE G-TAP A Series 2 Hardware Installation Guide, G-TAP A-TX21, G-TAP A-TX21-C, G-TAP A-SF21, Product Version 6.5, Document Version 1.0

Any additional customer documentation provided with the product, or that which may be available online was not included in the scope of the evaluation and therefore should not be relied upon to configure or operate the device as evaluated.

## 7 Evaluated Configuration

The evaluated configuration, as defined in the Security Target, is Gigamon GigaVUE appliance, running the software: Gigamon GigaVUE Version 6.5. Section 4.2 describes the TOE's physical configuration as well as the operational environment components to which it communicates. In its evaluated configuration, the TOE is configured to communicate with the following environment components:

- Certificate Authority (CA) for distribution of certificates and CRLs
- LDAP Server for remote authentication
- Management Workstation for local and remote administration
- Audit Server for remote storage of audit records
- Gigamon Fabric Manager (separate product).

To use the product in the evaluated configuration, the product must be configured as specified in the *Gigamon GigaVUE Version 6.5 Supplemental Administrative Guidance for Common Criteria Version 1.0* document.

## 8 IT Product Testing

This section describes the testing efforts of the developer and the evaluation team. It is derived from information contained in the *Assurance Activity Report for a Target of Evaluation* "Gigamon GigaVUE Version 6.5" Assurance Activities Report v1.0, dated November 15, 2024.

#### 8.1 Test Configuration

The evaluation team configured the TOE for testing according to the *Gigamon GigaVUE Version 6.5 Supplemental Administrative Guidance for Common Criteria Version 1.0* (AGD) document. The evaluation team set up a test environment for the independent functional testing that allowed them to perform the assurance activities against the TOE over the SFR relevant interfaces. The evaluation team conducted testing in the Booz Allen CCTL facility on an isolated network. Testing was performed against all two management interfaces defined in the ST (local CLI, remote CLI).

The TOE was configured to communicate with the following environment components:

- Function: CRL Distribution Point, Certification Authority
  - Linux gigamon2022-pki 5.10.0-11-amd64 #1 SMP Debian 5.10.92-1 (2022-01-18)
     x86 64 GNU/Linux
  - o Protocols: HTTP
  - o Tools:
    - tcpdump version 4.99.0
    - Certificate Authority/CRL Distribution Point (OpenSSL 1.1.1k)
- Function: Syslog Server
  - Linux gigamon2022-syslog 5.10.0-11-amd64 #1 SMP Debian 5.10.92-1 (2022-01-18)
     x86 64 GNU/Linux
  - o Protocols: SSH
  - o Tools:
    - tcpdump version 4.99.0
    - rsyslogd 8.2102.0 (aka 2021.02)
- Remote Authentication Server
  - Linux gigamon2022-ldap 5.10.0-11-amd64 #1 SMP Debian 5.10.92-1 (2022-01-18) x86\_64 GNU/Linux
  - Protocols: SSH
  - Tools:
    - tcpdump version 4.99.0
    - stunnel 5.56
    - OpenLDAP: slapd 2.4.57+dfsg-3
- Gigamon Fabric Manager Server
  - o Gigamon Fabric Manager Server 6.6 on Rocky Linux 8.10
  - o Protocols: TLS (client)
  - o Tools:
    - tcpdump version 4.99.0
- Function: Switch
  - Model: Cisco Catalyst WS-C Switch, WS-C3560X-24P
  - OS: Cisco IOS Software, C3560E Software (C3560E-UNIVERSALK9-M), Version 12.2(55)SE3
  - Protocols: N/A

- Function: Switch
  - o Model: Cisco Catalyst WS-C Switch, WS-C2960-24TT-L
  - OS: Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 12.2(50)SE4
  - Protocols: N/A

The following machines were used as the Management Workstations ("Test Workstation") for local and remote administration:

- Function: 3 x Administrator Test Workstation/Terminal Workstation
  - o Platform: Dell Precision M4800 Laptop/
  - OS: Windows 10 Version 21H2
  - o Protocols: TLS, SSH
  - o Tools:
    - Wireshark: version 3.6.7
    - PuTTY .73
- Function: CATL Test Workstation/Terminal Workstation
  - o Platform: VMware ESXi based Virtual Machine
  - OS: (Kali GNU/Linux Rolling 2018.3 Linux kali 5.18.0-kali5-amd64 #1 SMP PREEMPT\_DYNAMIC Debian 5.18.5-1kali6 (2022-07-07) x86\_64 GNU/Linux
  - o Protocols: TLS, SSH
  - Tools:
    - Wireshark: version 3.6.7
    - PuTTY .73
    - Ettercap Man-in-the-Middle (MITM) Packet Modification Tool
    - Modified SSH client for sending large packets for Test Case 010

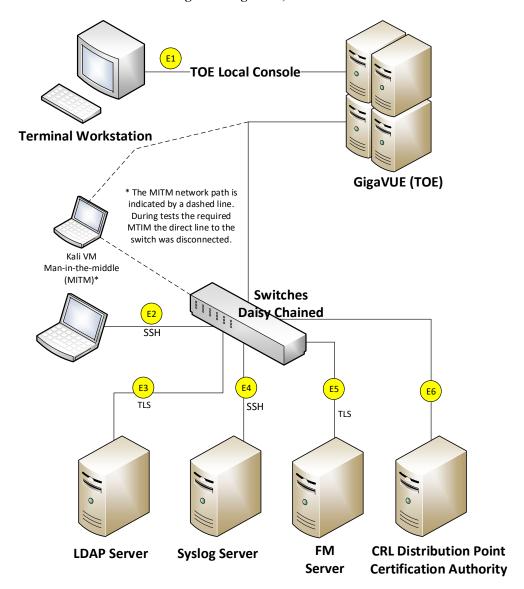


Figure 1 - Test Configuration

- E1: This is the local administrator access to the CLI via a direct connection.
- E2: The TOE acts as a SSH server for remote administrator access to the CLI.
- E3: The TOE acts as a TLSv1.2 client for accessing an LDAP server interface for authentication services.
- E4: The TOE acts as an SSH client for sending audit records to a remote audit server for external audit log storage.

E5: (HC Series and TA Series models only) The TOE acts as a HTTPS (i.e., TLSv1.2) server for connections received from a Gigamon Fabric Manager (separate product) which can be used to provide a central location for the configuration, management, and operation of primary functionality of one or more Gigamon GigaVUE HC and TA Visibility Appliances. The trusted channel interface is considered part of the TOE. The operational functionality provided by the Gigamon Fabric Manager is not considered part of the TOE.

E6: The TOE interfaces with a Certification Authority (CA) for issuance of server certificates and publication of a Certificate Revocation List (CRL) to determine the validity of certificates presented to the TOE.

#### 8.2 Developer Testing

No evidence of developer testing is required in the Evaluation Activities for this product.

#### 8.3 Evaluation Team Independent Testing

The test team's test approach was to test the security mechanisms of the TOE by exercising the external interfaces to the TOE and viewing the TOE behavior on the platform. The ST and the independent test plan were used to demonstrate test coverage of all SFR testing assurance activities as defined by the NDcPP for all *security relevant* TOE external interfaces. TOE external interfaces that will be determined to be *security relevant* are interfaces that

- change the security state of the product,
- permit an object access or information flow that is regulated by the security policy,
- are restricted to subjects with privilege or behave differently when executed by subjects with privilege, or
- invoke or configure a security mechanism.

Security functional requirements were determined to be *appropriate* to a particular interface if the behavior of the TOE that supported the requirement could be invoked or observed through that interface. The evaluation team tested each interface for all relevant behavior of the TOE that applied to that interface.

#### 8.4 Evaluation Team Vulnerability Testing

The evaluation team reviewed vendor documentation, formulated hypotheses, performed vulnerability analysis, and documented the hypotheses and analysis in accordance with NDcPP requirements. Keywords were identified based upon review of the Security Target and AGD. The following keywords (version information used for refining results) were identified:

Keyword	Description
Gigamon	This is a generic term for searching for known vulnerabilities
	produced by the company as a whole.
GigaVUE (6.5)	This is a generic term for searching for known vulnerabilities for
	the specific product which will cover GigaVUE-OS
Rocky Linux (8.7)	This is a generic term searching for known vulnerabilities for the
-	underlying operating system.
Libraries	
OpenSSL (3.0.14B)	This is a generic term searching for known vulnerabilities for the
	TOE's cryptographic TLS module.
OpenSSH (9.8p1)	This is a generic term searching for known vulnerabilities for the
	TOE's cryptographic SSH module.
curl (8.9.1)	This is a generic term searching for known vulnerabilities for the
	third-party library.
bind-export-libs	This is a generic term searching for known vulnerabilities for the
(9.11.36-14)	third-party library.
bind-libs-lite	This is a generic term searching for known vulnerabilities for the
(9.11.36-14)	third-party library.

Keyword	Description
bzip2 (1.0.6-26)	This is a generic term searching for known vulnerabilities for the
	third-party library.
grub2 (2.02-156)	This is a generic term searching for known vulnerabilities for the
	third-party library.
gzip (1.9-13)	This is a generic term searching for known vulnerabilities for the
	third-party library.
log4cxx (0.10.0-31)	This is a generic term searching for known vulnerabilities for the
Iden (2.6.4)	third-party library.  This is a generic term searching for known vulnerabilities for the
ldap (2.6.4)	This is a generic term searching for known vulnerabilities for the third-party library.
Perl (5.26.3-421)	This is a generic term searching for known vulnerabilities for the
1 (11 (3.20.3-421)	third-party library.
rsyslog (8.2102.0-10)	This is a generic term searching for known vulnerabilities for the
13/3108 (0.2102.0 10)	third-party library.
SQLite (3.26.0-19)	This is a generic term searching for known vulnerabilities for the
(0.2000 0.7)	third-party library.
unzip (6.0-46)	This is a generic term searching for known vulnerabilities for the
1, ,	third-party library.
zlib (1.2.11-20)	This is a generic term searching for known vulnerabilities for the
	third-party library.
Hardware	
Intel Atom (C2758	This is a generic term searching for known vulnerabilities for the
and C2538) (Rangely)	TOE's underlying host processor.
Intel Xeon (D1527)	This is a generic term searching for known vulnerabilities for the
(Broadwell)	TOE's underlying host processor.
4.4.3.3 Keyword:	This is a generic term searching for known vulnerabilities for the
Intel Xeon (D1518)	TOE's underlying host processor.
Intel Atom (C3338	This is a generic term searching for known vulnerabilities for the
and 3538) (Denverton)	TOE's underlying host processor.

These keywords were used individually and as part of various permutations and combinations to search for vulnerabilities on public vulnerability sources on November 15, 2024. The following public vulnerability sources were searched:

- NIST National Vulnerabilities: https://web.nvd.nist.gov/view/vuln/search
- Common Vulnerabilities and Exposures: http://cve.mitre.org/cve/https://www.cvedetails.com/vulnerability-search.php
- US-CERT: http://www.kb.cert.org/vuls/html/search
- Tenable Network Security http://nessus.org/plugins/index.php?view=search
- Tipping Point Zero Day Initiative http://www.zerodayinitiative.com/advisories
- Offensive Security Exploit Database: https://www.exploit-db.com/
- Rapid7 Vulnerability Database: https://www.rapid7.com/db/vulnerabilities

Upon the completion of the vulnerability analysis research, the team had identified several generic vulnerabilities upon which to build a test suite. These tests were created specifically with the intent of exploiting these vulnerabilities within the TOE or its configuration.

The team tested the following areas:

#### • Port Scanning

Remote access to the TOE should be limited to the standard TOE interfaces and procedures. This test enumerates network port and service information to determine if any ports were open and running services outside of the TOE standard configuration.

#### • Fuzzing – Mutated TYPE and CODE

This test determines if the TOE is adversely affected by the handling of large number of mutated IPv4 and ICMPv4. IPv6 was not supported in the evaluated configuration.

#### • Fuzzing – Mutated remaining field

This test determines if the TOE is adversely affected by the handling of large number of mutated IPv4 packets where the header fields are carefully mutated to represent boundary cases, significant values, and randomly chosen values. IPv6 was not supported in the evaluated configuration.

### • SSH Timing Attack (User Enumeration)

This attack attempts to enumerate validate usernames for the SSH interface, by observing the difference in server response times to valid username login attempts.

#### • Force SSHv1

This attack determines if the client will accept both SSHv1 and SSHv2 connections when the TOE claims to only support SSHv2

#### • CLI Privilege Escalation

This attack involves enumerating a valid username with an attempt to access the underlying OS CLI shell, then cracking the user's password and logging in.

The evaluation team determined that no residual vulnerabilities exist that are exploitable by attackers with Basic Attack Potential.

## 9 Results of the Evaluation

The results of the assurance requirements are generally described in this section and are presented in detail in the proprietary ETR. The reader of this document can assume that all Evaluation Activities and work units received a passing verdict.

A verdict for an assurance component is determined by the resulting verdicts assigned to the corresponding evaluator action elements. The evaluation was conducted based upon CC version 3.1 rev 5 and CEM version 3.1 rev 5. The evaluation determined the TOE to be Part 2 extended, and meets the SARs contained the PP. Additionally, the evaluator performed the Evaluation Activities specified in the NDcPP.

The following evaluation results are extracted from the non-proprietary Evaluation Technical Report provided by the CCTL and are augmented with the validator's observations thereof.

#### 9.1 Evaluation of the Security Target (ASE)

The evaluation team applied each ASE CEM work unit. The ST evaluation ensured the ST contains a description of the environment in terms of policies and assumptions, a statement of security requirements claimed to be met by the Gigamon GigaVUE product that is consistent with the Common Criteria, and product security function descriptions that support the requirements. Additionally, the evaluator performed an assessment of the Evaluation Activities specified in the NDcPP Supporting Documents in order to verify that the specific required content of the TOE Summary Specification is present, consistent, and accurate.

The validators reviewed the work of the evaluation team, and found that sufficient evidence and justification was provided by the evaluation team to confirm that the evaluation was conducted in accordance with the requirements of the CEM, and that the conclusion reached by the evaluation team was justified.

#### **9.2** Evaluation of the Development (ADV)

The evaluation team applied each ADV CEM work unit. The evaluation team assessed the design documentation and found it adequate to aid in understanding how the TSF provides the security functions. The design documentation consists of a functional specification contained in the Security Target's TOE Summary Specification. Additionally, the evaluator performed the Evaluation Activities specified in the NDcPP Supporting Documents related to the examination of the information contained in the TOE Summary Specification.

The validators reviewed the work of the evaluation team and found that sufficient evidence and justification was provided by the evaluation team to confirm that the evaluation was conducted in accordance with the Assurance Activities, and that the conclusion reached by the evaluation team was justified.

#### 9.3 Evaluation of the Guidance Documents (AGD)

The evaluation team applied each AGD CEM work unit. The evaluation team ensured the adequacy of the user guidance in describing how to use the operational TOE. Additionally, the evaluation team ensured the adequacy of the administrator guidance in describing how to securely administer the TOE. The guides were assessed during the design and testing phases of the evaluation to ensure they were complete. Additionally, the evaluator performed the Evaluation Activities specified in the NDcPP Supporting Document related to the examination of the information contained in the operational guidance documents.

The validators reviewed the work of the evaluation team and found that sufficient evidence and justification was provided by the evaluation team to confirm that the evaluation was conducted in accordance with the Assurance Activities, and that the conclusion reached by the evaluation team was justified.

#### 9.4 Evaluation of the Life Cycle Support Activities (ALC)

The evaluation team applied each ALC CEM work units. The evaluation team found that the TOE was identified.

The validators reviewed the work of the evaluation team and found that sufficient evidence and justification was provided by the evaluation team to confirm that the evaluation was conducted in accordance with the requirements of the CEM, and that the conclusion reached by the evaluation team was justified.

#### 9.5 Evaluation of the Test Documentation and the Test Activity (ATE)

The evaluation team applied each ATE CEM work unit. The evaluation team ran the set of tests specified by the Assurance Activities in the NDcPP Supporting Documents and recorded the results in a Test Report, summarized in the Evaluation Technical Report and sanitized for non-proprietary consumption in the Assurance Activity Report.

The validators reviewed the work of the evaluation team and found that sufficient evidence was provided by the evaluation team to show that the evaluation activities addressed the test activities in the NDcPP Supporting Documents, and that the conclusion reached by the evaluation team was justified.

#### 9.6 Vulnerability Assessment Activity (VAN)

The evaluation team applied each AVA CEM work unit. The evaluation team performed a public search for vulnerabilities, performed vulnerability testing and did not discover any issues with the TOE. The evaluation team also ensured that the specific vulnerabilities defined in the NDcPP Supporting Documents were assessed and that the TOE was resistant to exploit attempts that utilize these vulnerabilities.

The validators reviewed the work of the evaluation team and found that sufficient evidence and justification was provided by the evaluation team to confirm that the evaluation addressed the vulnerability analysis requirements in the NDcPP Supporting Documents, and that the conclusion reached by the evaluation team was justified.

#### 9.7 Summary of Evaluation Results

The evaluation team's assessment of the evaluation evidence demonstrates that the claims in the ST are met. Additionally, the evaluation team's test activities also demonstrated the accuracy of the claims in the ST.

The validation team's assessment of the evidence provided by the evaluation team is that it demonstrates that the evaluation team performed the Evaluation Activities in the NDcPP Supporting Document, and correctly verified that the product meets the claims in the ST.

### 10 Validator Comments

The validation team notes that the evaluated configuration is dependent upon the TOE being configured per the evaluated configuration instructions in the *Gigamon GigaVUE Version 6.5* Supplemental Administrative Guidance for Common Criteria Version 1.0 document. No versions of the TOE and software, either earlier or later were evaluated.

Administrators should take note of the fact that when the product is configured to offload audit files to an audit logging server, if that communications link is interrupted, the audit files generated during the time of the interruption will be captured locally. However, upon resumption of the connectivity, the offload begins with the reconnection and will NOT send those audit files generated during the outage. It will be necessary for the administrator to take steps to offload those files or they will be overwritten when the audit log is full.

Administrators should also note that GigaVUE-OS includes the Rocky Linux 8.7 OS and the Gigamon developed software applications that are installed on Rocky Linux 8.7. Gigamon is responsible for providing all patches to maintain the security of the entire product, including the Rocky Linux OS. Rocky Linux 8.7 is considered the operating environment for the CAVP certificates.

Please note that the functionality evaluated is scoped exclusively to the security functional requirements specified in the Security Target. Other functionality included in the product was not assessed as part of this evaluation. Other functionality provided by devices in the operational environment, such as the syslog server, need to be assessed separately and no further conclusions can be drawn about their effectiveness.

## 11 Annexes

Not applicable

## 12 Security Target

The security target for this product's evaluation is *Gigamon GigaVUE Version 6.5 Security Target v1.0*, dated September 30, 2024.

# 13 List of Acronyms

Acronym	Definition
AES	Advanced Encryption Standard
API	Application Programming Interface
CA	Certificate Authority
CAVP	Cryptographic Algorithm Verification Program
CC	Common Criteria
CLI	Command-Line Interface
cPP	collaborative Protection Profile
CPU	Central Processing Unit
CRL	Certificate Revocation List
CSP	Content Security Policy
DRBG	Deterministic Random Bit Generator
FTP	File Transfer Protocol
HMAC	Hash-based Message Authentication Code
HTTPS	Hypertext Transfer Protocol Secure
I&A	Identity and Access
IDS	Intrusion Detection System
LDAP	Lightweight Directory Access Protocol
MAC	Message Authentication Code
NIAP	National Information Assurance Partnership
NTP	Network Time Protocol
OCSP	Online Certificate Status Protocol
OS	Operating System
PP	Protection Profile
RAM	Random Access Memory
RBG	Random Bit Generator
RNG	Random Number Generator
RU	Rack Unit
SCP	Secure Copy Protocol
SFR	Security Functional Requirement
SFTP	SSH File Transfer Protocol
SHA	Secure Hash Algorithm
SHS	Secure Hash Standard
SPAN	Switched Port Analyzer
SSH	Secure Shell
ST	Security Target
SVR	Server
TAP	Test Access Port
TFTP	Trivial File Transfer Protocol
TLS	Transport Layer Security
TOE	Target of Evaluation
TSF	TOE Security Function
UART	Universal Asynchronous Receiver/Transmitter
UI	User Interface

# 14 Terminology

Term	Definition
Administrator or 'Admin'	A user who is assigned the 'Admin' role on the TOE and has the ability to manage the TSF. Synonymous with Security Administrator.
Credential	Data that establishes the identity of a user (e.g., a cryptographic key or password).
Operating System (OS)	Software that manages hardware resources and provides services for applications.
Platform	A platform can be an operating system, hardware environment, a software-based execution environment, or some combination of these. These types platforms may also run atop other platforms.
Security Administrator	An authorized administrator role that is authorized to manage the TOE and its data. This TOE defines three separate user roles, but only the most privileged role (Admin) is authorized to manage the TOE's security functionality and is therefore considered to be the Security Administrator for the TOE.
Trusted Channel	An encrypted connection between the TOE and a system in the Operational Environment.
Trusted Path	An encrypted connection between the TOE and the application a Security Administrator uses to manage it (SSH client, terminal client, etc.).
User	In a CC context, any individual who has the ability to access the TOE functions or data.

## 15 Bibliography

- 1. Common Criteria for Information Technology Security Evaluation Part 1: Introduction and general model, dated April 2017, version 3.1, Revision 5, CCMB-2017-004-001
- 2. Common Criteria for Information Technology Security Evaluation Part 2: Security functional components, dated April 2017, version 3.1, Revision 5, CCMB-2017-004-002
- 3. Common Criteria for Information Technology Security Evaluation Part 3: Security assurance components, dated April 2017, version 3.1, Revision 5, CCMB-2017-004-003
- 4. Common Methodology for Information Technology Security Evaluation Evaluation Methodology, dated April 2017, version 3.1, Revision 5, CCMB-2017-004-004
- 5. collaborative Protection Profile for Network Devices, Version 2.2e, 23 March 2020
- 6. Gigamon GigaVUE Version 6.5 Security Target v1.0, dated September 30, 2024
- 7. Gigamon GigaVUE Version 6.5 Supplemental Administrative Guidance for Common Criteria- v1.0
- 8. GigaVUE-OS CLI Reference Guide, GigaVUE-OS, Product Version 6.5, Document Version 1.0
- 9. GigaVUE-HC1 Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- 10. GigaVUE-HC1-Plus Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- 11. GigaVUE-HC3 Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- 12. GigaVUE-HCT Hardware Installation Guide, GigaVUE H Series, Product Version 6.5, Document Version 1.0
- 13. GigaVUE TA25 Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- 14. GigaVUE TA25E Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- 15. GigaVUE TA200 Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- 16. GigaVUE TA200E Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- 17. GigaVUE TA400 Hardware Installation Guide, GigaVUE TA Series, Product Version 6.5, Document Version 1.0
- 18. GigaVUE G-TAP A Series 2 Hardware Installation Guide, G-TAP A-TX21, G-TAP A-TX21-C, G-TAP A-SF21, Product Version 6.5, Document Version 1.0
- 19. Assurance Activity Report for a Target of Evaluation "Gigamon GigaVUE Version 6.5" Assurance Activities Report v1.0 dated November 15, 2024