


**National Information Assurance Partnership
Common Criteria Evaluation and Validation Scheme**

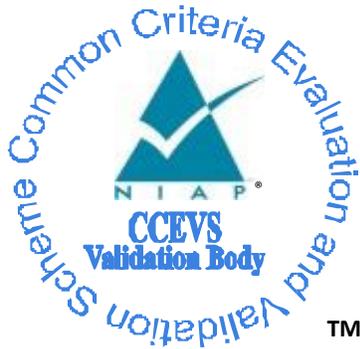

Validation Report

for

NetApp Storage Encryption (NSE) running ONTAP 9.7P13

Report Number: CCEVS-VR-VID11174-2021

Dated: 7 September 2021

Version: 1.0

National Institute of Standards and Technology
Information Technology Laboratory
100 Bureau Drive
Gaithersburg, MD 20899

Department of Defense
ATTN: NIAP, Suite 6982
9800 Savage Road
Fort Meade, MD 20755-6982

Acknowledgements

Validation Team

Jerome F. Myers, PhD

James J. Donndelinger

Marybeth S. Panock

The Aerospace Corporation

Common Criteria Testing Laboratory

*Leidos Inc.
Columbia, MD*

Table of Contents

1	Executive Summary.....	1
2	Identification.....	2
3	Architectural Information	4
3.1	TOE Evaluated Configuration	4
3.2	TOE Architecture.....	4
3.3	Physical Boundaries	5
4	Security Policy.....	6
4.1	Cryptographic Support.....	6
4.2	Security Management.....	6
4.3	Protection of the TSF	6
5	Assumptions.....	7
6	Clarification of Scope	8
7	Documentation	9
8	IT Product Testing	10
8.1	Developer Testing.....	10
8.2	Evaluation Team Independent Testing	10
8.3	Test Configuration.....	10
9	TOE Evaluated Configuration	12
9.1	Evaluated Configuration	12
9.2	Excluded Functionality	12
10	Results of the Evaluation	14
10.1	Evaluation of the Security Target (ST) (ASE)	14
10.2	Evaluation of the Development (ADV).....	14
10.3	Evaluation of the Guidance Documents (AGD).....	14
10.4	Evaluation of the Life Cycle Support Activities (ALC).....	14
10.5	Evaluation of the Test Documentation and the Test Activity (ATE)	15
10.6	Vulnerability Assessment Activity (AVA).....	15
10.7	Summary of Evaluation Results	16
11	Validator Comments/Recommendations	17
12	Security Target.....	18
13	Abbreviations and Acronyms	19
14	Bibliography	20

List of Tables

Table 1: Evaluation Identifiers	2
---------------------------------	---

1 Executive Summary

This Validation Report (VR) documents the National Information Assurance Partnership (NIAP) assessment of the evaluation of NetApp Storage Encryption (NSE) running ONTAP 9.7P13 (the Target of Evaluation, or TOE). It presents the evaluation results, their justifications, and the conformance results. This VR is not an endorsement of the TOE by any agency of the U.S. Government and no warranty of the TOE is either expressed or implied.

This VR is intended to assist the end-user of this product and any security certification agent for that end-user in determining the suitability of this Information Technology (IT) product in their environment. End-users should review the Security Target (ST), which is where specific security claims are made, in conjunction with this Validation Report (VR), which describes how those security claims were evaluated and tested and any restrictions on the evaluated configuration. This VR applies only to the specific version and configuration of the product as evaluated and as documented in the ST. Prospective users should carefully read the Assumptions and Clarification of Scope in Section 4 and the Validator Comments in Section 11, where any restrictions on the evaluated configuration are highlighted.

The evaluation was performed by Leidos Common Criteria Testing Laboratory (CCTL) in Columbia, Maryland, USA, and was completed in August 2021. The information in this report is largely derived from the Evaluation Technical Report (ETR) and associated test report, all written by Leidos. The evaluation determined that the TOE is:

- Common Criteria Part 2 Extended and Common Criteria Part 3 Conformant

and demonstrates exact conformance to:

- *collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition, Version 2.0 + Errata, February 1, 2019 [5]*

as clarified by all applicable Technical Decisions.

The TOE is NetApp Storage Encryption (NSE) running ONTAP 9.7P13.

The TOE identified in this VR has been evaluated at a NIAP approved CCTL using the Common Methodology for IT Security Evaluation (Version 3.1, Rev. 5) for conformance to the Common Criteria for IT Security Evaluation (Version 3.1, Rev. 5). The evaluation has been conducted in accordance with the provisions of the NIAP Common Criteria Evaluation and Validation Scheme and the conclusions of the testing laboratory in the Evaluation Technical Report are consistent with the evidence provided.

The validation team monitored the activities of the evaluation team, provided guidance on technical issues and evaluation processes, and reviewed the individual work units documented in the Evaluation Technical Report (ETR) and the Assurance Activities Report (AAR). The validation team found that the evaluation showed that the product satisfies all of the functional requirements and assurance requirements stated in the Security Target (ST). The conclusions of the testing laboratory in the Evaluation Technical Report are consistent with the evidence produced. Therefore, the validation team concludes that the testing laboratory's findings are accurate, the conclusions justified, and the conformance results are correct.

The Leidos evaluation team determined that the TOE is conformant to the claimed Protection Profile (PP) and, when installed, configured and operated as specified in the evaluated guidance documentation, satisfies all the security functional requirements stated in the ST [7].

2 Identification

The CCEVS is a joint National Security Agency (NSA) and National Institute of Standards and Technology (NIST) effort to establish commercial facilities to perform trusted product evaluations. Under this program, commercial testing laboratories called Common Criteria Testing Laboratories (CCTLs) use the Common Criteria and Common Methodology for IT Security Evaluation (CEM) to conduct security evaluations, in accordance with National Voluntary Laboratory Assessment Program (NVLAP) accreditation.

The NIAP Validation Body assigns Validators to monitor the CCTLs to ensure quality and consistency across evaluations. Developers of IT products desiring a security evaluation contract with a CCTL and pay a fee for their product's evaluation. Upon successful completion of the evaluation, the product is added to NIAP's Product Compliant List (PCL).

Table 1 provides information needed to completely identify the product, including:

- The TOE—the fully qualified identifier of the product as evaluated
- The ST—the unique identification of the document describing the security features, claims, and assurances of the product
- The conformance result of the evaluation
- The PP/PP-Modules to which the product is conformant
- The organizations and individuals participating in the evaluation.

Table 1: Evaluation Identifiers

Item	Identifier
Evaluation Scheme	United States NIAP Common Criteria Evaluation and Validation Scheme
TOE	NetApp Storage Encryption (NSE) running ONTAP 9.7P13
Security Target	NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Security Target, Version 1.0, 14 June 2021
Sponsor & Developer	NetApp, Inc. 1395 Crossman Avenue Sunnyvale, CA 94089
Completion Date	August 2021
CC Version	Common Criteria for Information Technology Security Evaluation, Version 3.1, Release 5, April 2017
CEM Version	Common Methodology for Information Technology Security Evaluation: Version 3.1, Release 5, April 2017
PP	<i>collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition</i> , Version 2.0 + Errata, February 1, 2019
Conformance Result	PP Compliant, CC Part 2 Extended, CC Part 3 Conformant
CCTL	Leidos Common Criteria Testing Laboratory 6841 Benjamin Franklin Drive Columbia, MD 21046

Item	Identifier
Evaluation Personnel	Anthony Apted Kevin Steiner Punit Patel
Validation Personnel	Jerome F. Myers, PhD James J. Donndelinger Marybeth S. Panock

3 Architectural Information

Note: The following architectural description is based on the description presented in the Security Target.

The TOE is NetApp Storage Encryption (NSE) running ONTAP 9.7P13, an authorization acquisition product that obtains and manages authorization data used to access encrypted data stored on a full disk encryption product. The TOE provides the management and protection of keys that are used to protect the data encryption keys used by third-party self-encrypting drives (SEDs). The TOE supports third party SEDs that follow either the Trusted Computing Group's (TCG) Opal or Enterprise standards.

The ONTAP 9.7P13 component of the TOE is a proprietary operating system and data management software that is installed on the appliances listed below in Section 1.1 and that offers unified storage for applications that read and write data over block- or file- access protocols, in storage configurations that range from high-speed flash, to lower- priced spinning media, to cloud-based object storage.

3.1 TOE Evaluated Configuration

Detail regarding the evaluated configuration is provided in Section 8 below.

3.2 TOE Architecture

NetApp Storage Encryption (NSE) running ONTAP 9.7P13 (the TOE) is an authorization acquisition product that obtains and maintains authorization data used to access encrypted data stored on a full disk encryption product. It provides authorization data to third party self-encrypting drives (SEDs).

The TOE is provided pre-installed on NetApp disk storage appliances consisting of storage controllers and one or more enclosures of third-party SEDs. The TOE supports SEDs that follow either the Trusted Computing Group's (TCG) Opal or Enterprise standards. Both standards support the use of an Authentication Key (AK) and one or more Data Encryption Keys (DEK) per drive. ONTAP, the TOE's operating system, uses the AK to unlock a SED. Once the SED verifies that the AK is correct, it uses the AK to decrypt the drive's DEK(s).

The TOE in its evaluated configuration requires the use of its Onboard Key Manager (OKM) to manage the AK used to unlock the array's SEDs. Furthermore, the OKM must be configured with CC mode enabled. When CC mode is enabled, the OKM requires entry of a Cluster Passphrase every time the storage array is booted.

The Cluster Passphrase is an administrator-generated ASCII string, from 64 to 256 characters long, that is used as the authorization factor. The Cluster Passphrase is used in conjunction with a salt value (the Cluster Salt) to derive the Cluster Passphrase Key Encryption Key (CP-KEK), via an approved password-based key derivation function (PBKDFv2, as specified in NIST SP 800-132). The CP-KEK is then used to unwrap the Cluster Key Encryption Key (CKEK) and the CKEK is used to unwrap the AK, which in TOE terms is the Border Encryption Value (BEV). The Cluster Salt, CKEK, and AK, are all generated by the TOE's deterministic random bit generator (DRBG). The TOE uses key wrapping as defined in NIST SP 800-38F to protect the AK (wrapped using the CKEK) and the CKEK (wrapped using the CP-KEK) when storing the AK and CKEK in non-volatile memory.

Depending on the NetApp hardware controller model, node storage consists of hard disk drives (HDDs), solid state drives (SSDs), or a combination of both. Network ports on the controller provide access to data. Physical storage and network connectivity resources are virtualized, visible to cluster administrators only, not to NAS clients or SAN hosts.

Customers use storage virtual machines (SVMs) to serve data to clients and hosts. An SVM is a logical entity that abstracts physical resources. Data accessed through the SVM is not bound to a location in storage. Network access to the SVM is not bound to a physical port.

In addition to data volumes, ONTAP also uses the following special volumes (note: these volumes, like all volumes on an NSE system, are hosted on third party self-encrypting drives):

- A node root volume (typically “vol0”) contains node configuration information and logs
- An SVM root volume serves as the entry point to the namespace provided by the SVM and contains namespace directory information
- System volumes contain special metadata such as service audit logs.

ONTAP prevents customers from storing user data on these special volumes.

In addition to data SVMs, ONTAP deploys special SVMs for administration:

- An admin SVM is created when the cluster is set up
- A node SVM is created when a node joins a new or existing cluster
- A system SVM is automatically created for cluster-level communications in an IP space.

The administrative SVMs listed above cannot be used to serve data. All administration is performed via the CLI accessed using a console directly connected to the appliance’s RS-232 port.

NetApp Storage Encryption may be configured via the appliance’s RS-232 console port. NetApp Storage Encryption also supports various networking protocols including SSH, CIFS, NFS, HTTP, HTTPS, DHCP, SNMP, Fibre Channel, and iSCSI, among others. The Protection Profile associated with this product did not consider, nor did it include, networking protocols as part of the security functional requirements and, as a result, did not include any requirements for assessing those protocols. Consequently, the protocols have not been examined as part of the required assurance activities and, therefore, no claims are made about the TOE’s networking protocols.

The only evaluated interface is the RS-232 interface. As noted in the Excluded Functionality Section 9.2, networking protocols such as SSH or HTTPS, while supported by the product, were not covered by the evaluation. This is because the Protection Profile ([CPP_FDE_AA_V2.0E]) does not include networking protocols as part of the security functional requirements. The customer should consider the impact of using the product’s SSH or HTTPS interfaces for administration, with the understanding that the protection of user data in transit was not evaluated and the Security Target assumes that the environment is appropriately protected.

3.3 Physical Boundaries

The physical boundary of the TOE encompasses the NetApp ONTAP 9.7P13 software.

4 Security Policy

The TOE enforces the following security policies as described in the ST.

4.1 Cryptographic Support

The TOE includes NIST CAVP-validated cryptographic algorithms supporting cryptographic functions. The TOE provides key wrapping, key derivation, and validation of the Border Encryption Value (BEV).

4.2 Security Management

The TOE supports management functions for forwarding requests to change the DEK to the SED, forwarding requests to cryptographically erase the DEK to the SED, allowing authorized users to change the authorization factor being used, and initiate TOE software updates using a command line interface.

4.3 Protection of the TSF

The TOE provides trusted firmware updates, protects keys and key material, and supports Compliant power saving states. The TOE runs a suite of self-tests during initial start-up (on power on).

5 Assumptions

The ST references the PP to which it claims conformance for assumptions about the use of the TOE. Those assumptions, drawn from the claimed PP, are as follows:

- Users enable Full Drive Encryption on a newly provisioned or initialized storage device free of protected data in areas not targeted for encryption. The cPP does not intend to include requirements to find all the areas on storage devices that potentially contain protected data. In some cases, it may not be possible – for example, data contained in “bad” sectors. While inadvertent exposure to data contained in bad sectors or un-partitioned space is unlikely, one may use forensics tools to recover data from such areas of the storage device. Consequently, the cPP assumes bad sectors, un-partitioned space, and areas that must contain unencrypted code (e.g., MBR and AA/EE pre-authentication software) contain no protected data.
- Upon the completion of proper provisioning, the drive is only assumed secure when in a powered off state up until it is powered on and receives initial authorization.
- Communication among and between product components (e.g., AA and EE) is sufficiently protected to prevent information disclosure. In cases in which a single product fulfils both cPPs, then the communication between the components does not extend beyond the boundary of the TOE (e.g., communication path is within the TOE boundary). In cases in which independent products satisfy the requirements of the AA and EE, the physically close proximity of the two products during their operation means that the threat agent has very little opportunity to interpose itself in the channel between the two without the user noticing and taking appropriate actions.
- Authorized users follow all provided user guidance, including keeping password/passphrases and external tokens securely stored separately from the storage device and/or platform.
- The platform in which the storage device resides (or an external storage device is connected) is free of malware that could interfere with the correct operation of the product.
- External tokens that contain authorization factors are used for no other purpose than to store the external token authorization factors.
- The user does not leave the platform and/or storage device unattended until all volatile memory is cleared after a power-off, so memory remnant attacks are infeasible. Authorized users do not leave the platform and/or storage device in a mode where sensitive information persists in non-volatile storage (e.g., lock screen). Users power the platform and/or storage device down or place it into a power managed state, such as a “hibernation mode”.
- Authorized administrators ensure password/passphrase authorization factors have sufficient strength and entropy to reflect the sensitivity of the data being protected.
- The product does not interfere with or change the normal platform identification and authentication functionality such as the operating system login. It may provide authorization factors to the operating system's login interface, but it will not change or degrade the functionality of the actual interface.
- All cryptography implemented in the Operational Environment and used by the product meets the requirements listed in the cPP. This includes generation of external token authorization factors by a RBG.

- The platform is assumed to be physically protected in its Operational Environment and not subject to physical attacks that compromise the security and/or interfere with the platform's correct operation.

6 Clarification of Scope

All evaluations (and all products) have limitations, as well as potential misconceptions that need clarifying. This text covers some of the more important limitations and clarifications of this evaluation. Note that:

- As with any evaluation, this evaluation only shows that the evaluated configuration meets the security claims made, with a certain level of assurance (the evaluation activities specified in *Supporting Document – Mandatory Technical Document – Full Drive Encryption: Authorization Acquisition, Version 2.0+Errata 20190201, 1 February 2019* [6] and performed by the evaluation team). The functionality evaluated is scoped exclusively to the security functional requirements specified in the collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition, Version 2.0 + Errata, February 1, 2019, and applicable Technical Decisions. Any additional security related functional capabilities of the TOE were not covered by this evaluation. In particular, the functionality listed in Section 9.2 is excluded from the scope of the evaluation.
- This evaluation covers only the specific software distributions and versions identified in this document, and not any earlier or later versions released or in process.
- The evaluation of security functionality of the product was limited to the functionality specified in NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Security Target, Version 1.0, 14 June 2021 [7].
- This evaluation did not specifically search for, nor attempt to exploit, vulnerabilities that were not “obvious” or vulnerabilities to objectives not claimed in the ST. The CEM defines an “obvious” vulnerability as one that is easily exploited with a minimum of understanding of the TOE, technical sophistication, and resources.
- The TOE must be installed, configured, and managed as described in the documentation referenced in Section 7 of this Validation Report.
- As noted in the TOE Architecture Section 3.2, the only evaluated interface is the RS-232 interface. The Excluded Functionality Section 9.2 states that networking protocols such as SSH or HTTPS, while supported by the product, were not covered by the evaluation. This is because the Protection Profile ([CPP_FDE_AA_V2.0E]) does not include networking protocols as part of the security functional requirements. The customer should consider the impact of using the product's SSH or HTTPS interfaces for administration, with the understanding that the protection of user data in transit was not evaluated and the Security Target assumes that the environment is appropriately protected.

7 Documentation

NetApp offers guidance documents describing the installation process for the TOE as well as guidance for subsequent administration and use of the applicable security features. The following documents, part of the ONTAP 9.7P13 documentation set, are included in the TOE documentation and were examined during the evaluation:

- Commands: Manual Page Reference, November 2019
- NetApp Encryption Power Guide, June 2021
- System Administration Reference, April 2020
- Upgrade Express Guide, January 2020
- Upgrade and Revert/Downgrade Guide, April 2020.

To use the product in the evaluated configuration, the product must be configured as specified in these guides.

These documents are available via the following URLs:

- <http://docs.netapp.com/ontap-9/index.jsp>
- <https://docs.netapp.com/us-en/ontap/>
- <https://www.netapp.com/us/documentation/ontap-and-oncommand-system-manager.aspx>

Additional customer documentation available via these URLs was not included in the scope of the evaluation and therefore should not be relied upon to configure or operate the product as evaluated. Consumers are encouraged to download the evaluated administrative guidance documentation from the NIAP website.

Only these manuals and sections of other manuals explicitly referenced by it should be trusted for the configuration, administration, and use of the product in its evaluated configuration.

8 IT Product Testing

8.1 Developer Testing

No evidence of developer testing is required in the assurance activities for this product.

8.2 Evaluation Team Independent Testing

This section describes the testing efforts of the evaluation team. It is derived from information contained in the following proprietary document:

- *NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Common Criteria Test Report and Procedures*, Version 1.0, 31 August 2021 [16]

A non-proprietary description of the tests performed and their results is provided in the following document:

- *Assurance Activities Report for NetApp Storage Encryption (NSE) running ONTAP 9.7P13*, Version 1.0, 31 August 2021 [15]

The purpose of the testing activity was to confirm the TOE behaves in accordance with the TOE security functional requirements as specified in the ST for a product that claims conformance to *collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition* ([5]).

The evaluation team devised a Test Plan based on the Test Activities specified in *Supporting Document – Mandatory Technical Document – Full Drive Encryption: Authorization Acquisition*. The Test Plan described how each test activity was to be instantiated within the TOE test environment. The evaluation team executed the tests specified in the Test Plan and documented the results in the team test report listed above.

Independent testing took place at Leidos CCTL facilities in Columbia, Maryland, from 17 September through 21 December 2020.

The evaluators received the TOE in the form that customers would receive it, installed and configured the TOE in accordance with the provided guidance, and exercised the Team Test Plan on equipment configured in the testing laboratory.

Given the complete set of test results from the test procedures exercised by the evaluators, the testing requirements for *collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition* were fulfilled.

8.3 Test Configuration

The evaluation team established a test configuration comprising:

- TOE components:
 - ONTAP 9.7P6 installed on following NetApp Storage Encryption appliances:
 - FAS 2650
 - FAS 8300
 - FAS 9000
 - AFF A800

- Test environment components:
 - Kali Linux Server (Release 2019.3), used as a storage client (i.e., client to access the storage arrays and disk volumes managed on the NetApp appliances under test)
 - Microsoft Windows 10 Enterprise workstation, supporting the following testing tools:
 - WinHex 19.9
 - HxD 2.4.0.0.

Subsequent to the conclusion of functional testing, NetApp issued the following patches: 9.7P7; 9.7P8; 9.7P9; 9.7P10; 9.7P11; 9.7P12; and 9.7P13. Of these patches, 9.7P8, 9.7P9, and 9.7P13 address published vulnerabilities (CVE-2021-26988, CVE-2021-26989, and CVE-2021-26994 respectively). The evaluation team reviewed the list of changes for each patch release and did not identify any changes as relevant to the claimed security functional requirements. As such, the evaluated version of the TOE (9.7P13) can be considered equivalent to the version on which evaluation testing was performed (9.7P6).

9 TOE Evaluated Configuration

9.1 Evaluated Configuration

The TOE is NetApp Storage Encryption (NSE) running ONTAP 9.7P13. The physical boundary of the TOE is the binary files comprising the ONTAP 9.7P13 software. The evaluated configuration is comprised of this software as configured in accordance with the documentation identified in Section 7.

The NetApp appliances included in the evaluated configuration are as follows:

Storage Array	Disk Type	Controller Form Factor	Processor
FAS2620	HDD/SSD	2U/12 internal drives	Intel Xeon D-1528 (Broadwell)
FAS2650	HDD/SSD	2U/24 internal drives	Intel Xeon D-1528 (Broadwell)
FAS2720	HDD/SSD	2U/12 internal drives	Intel Xeon D-1557 (Broadwell)
FAS2750	HDD/SSD	2U/24 internal drives	Intel Xeon D-1557 (Broadwell)
FAS8200 Hybrid Flash	HDD/SSD	3U	Intel Xeon D-1587 (Broadwell)
AFF A200	SSD	2U	Intel Xeon D-1528 (Broadwell)
AFF A220	NVMe Flash	2U/24 internal drives	Intel Xeon D-1557 (Broadwell)
AFF A300	SSD	3U	Intel Xeon D-1587 (Broadwell)
AFF C190	SSD	2U/24 internal drives	Intel Xeon D-1557 (Broadwell)
AFF A800	NVMe Flash	4U/48 internal drives	Intel Xeon Platinum 8160 (Skylake-SP)
AFF A320	SSD	2U	Intel Xeon Silver 4114 (Skylake-SP)
FAS9000	HDD	8U	Intel Xeon E5-2697v4 (Broadwell)
AFF A700	SSD	8U	Intel Xeon E5-2697v4 (Broadwell)
AFF A700s	SSD	4U/24 internal drives	Intel Xeon E5-2697v4 (Broadwell)
FAS8300	HDD	4U	Intel Xeon Silver 4210 (Cascade Lake)
FAS8700	HDD	4U	Intel Xeon Gold 5218 (Cascade Lake)
AFF A400	SSD	4U	Intel Xeon Silver 4210 (Cascade Lake)

9.2 Excluded Functionality

Excluded functionality was not specifically identified in the ST as a separate section. However, the information here was collected from the ST and is considered accurate.

The cloud-based storage is considered out of scope for the evaluation and has not been tested or evaluated.

Protected data does not include the Master Boot Record or Pre-authentication area of the drive – areas of the drive that are necessarily unencrypted.

The TOE supports these various networking protocols, including SSH, CIFS, NFS, HTTP, HTTPS, DHCP, SNMP, Fibre Channel, and iSCSI, among others. However, the Protection Profile ([CPP_FDE_AA_V2.0E]) associated with this product did not consider, nor did it include, networking protocols as part of the security functional requirements and, as a result, did not include any requirements for addressing those protocols. Consequently, the protocols have not been examined as part of the required assurance activities and, therefore, no claims are made about the TOE's networking protocols.

NetApp appliances typically are configured in cluster nodes in high-availability (HA) pairs for fault tolerance and non-disruptive operation. The HA functionality was not covered in the scope of the evaluation or testing.

10 Results of the Evaluation

The results of the evaluation of the TOE against its target assurance requirements are generally described in this section and are presented in detail in the proprietary Evaluation Technical Report for NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Part 2 ([14]). The reader of this VR can assume that all assurance activities and work units received passing verdicts.

A verdict for an assurance component is determined by the resulting verdicts assigned to the corresponding evaluator action elements. The evaluation was conducted based upon CC version 3.1, revision 5 ([1], [2], [3]) and CEM version 3.1, revision 5 ([4]), and the specific evaluation activities specified in *Supporting Document – Mandatory Technical Document – Full Drive Encryption: Authorization Acquisition, Version 2.0+Errata 20190201, 1 February 2019* ([6]). The evaluation determined the TOE satisfies the conformance claims made in the NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Security Target, of Part 2 Extended and Part 3 Conformant. The TOE satisfies the requirements specified in *collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition, Version 2.0+Errata, 1 February 2019* ([5]).

The Validators reviewed all the work of the evaluation team and agreed with their practices and findings.

10.1 Evaluation of the Security Target (ST) (ASE)

The evaluation team performed each TSS assurance activity and ASE CEM work unit. The ST evaluation ensured the ST contains an ST introduction, TOE overview, TOE description, security problem definition in terms of threats, policies and assumptions, description of security objectives for the operational environment, a statement of security requirements claimed to be met by the product that are consistent with the claimed Protection Profile, and security function descriptions that satisfy the requirements.

10.2 Evaluation of the Development (ADV)

The evaluation team performed each ADV assurance activity and applied each ADV_FSP.1 CEM work unit. The evaluation team assessed the evaluation evidence and found it adequate to meet the requirements specified in the claimed Protection Profile for design evidence. The ADV evidence consists of the TSS descriptions provided in the ST and product guidance documentation providing descriptions of the TOE external interfaces.

10.3 Evaluation of the Guidance Documents (AGD)

The evaluation team performed each guidance assurance activity and applied each AGD work unit. The evaluation team determined the adequacy of the operational user guidance in describing how to operate the TOE in accordance with the descriptions in the ST. The evaluation team followed the guidance in the TOE preparative procedures to test the installation and configuration procedures to ensure the procedures result in the evaluated configuration. The guidance documentation was assessed during the design and testing phases of the evaluation to ensure it was complete.

10.4 Evaluation of the Life Cycle Support Activities (ALC)

The evaluation team performed each ALC assurance activity and applied each ALC_CMC.1 and ALC_CMS.1 CEM work unit, to the extent possible given the evaluation evidence required by the claimed Protection Profiles. The evaluation team ensured the TOE is labeled with a unique identifier consistent with the TOE identification in the evaluation evidence, and that the ST describes how timely security updates are made to the TOE.

10.5 Evaluation of the Test Documentation and the Test Activity (ATE)

The evaluation team performed each test activity and applied each ATE_FUN.1 CEM work unit. The evaluation team ran the set of tests specified by the claimed PP and recorded the results in the Test Report, summarized in the AAR.

10.6 Vulnerability Assessment Activity (AVA)

The evaluation team performed each AVA assurance activity and applied each AVA_VAN.1 CEM work unit. The evaluation team performed a vulnerability analysis following the processes described in the claimed PP. The vulnerability analysis comprised a public domain search for potential vulnerabilities.

Searches of public vulnerability repositories were performed on 31 August 2021.

The evaluation team searched the following public vulnerability repositories.

- Common Vulnerabilities and Exposures: <http://cve.mitre.org/cve/>
- National Vulnerability Database: <http://nvd.nist.gov/vuln/search>
- US-CERT Vulnerability Notes Database: <https://www.kb.cert.org/vuls/>.

The evaluation team used the following search terms in the searches of these repositories:

- Product name—the evaluation team searched on the following terms:
 - “netapp”/ “netapp ontap”
 - “netapp fas”
 - “netapp aff”
 - “network storage encryption”
- Underlying components—the evaluation team searched on the following terms:
 - “ontap 9.7p13”
 - “openssl 1.0.2s”
 - “intel isa-l crypto library 2.22”
 - “intel storage acceleration library”
 - “x440_phm2800mcto”
 - “x440_tpm3v800amd”
 - “x4010s172b1t9nte”
 - “x417_hcbfe900a10”
 - “x417_sltn900a10”
- Search terms specified in [SD]—the evaluation team searched on the following terms:
 - “drive encryption”
 - “disk encryption”
 - “key destruction”
 - “key sanitization”
 - “opal management software”/ “opal”
 - “sed management software”/ “self encrypting drive”
 - “password caching”.

The results of these searches did not identify any vulnerabilities that are applicable to the TOE. The conclusion drawn from the vulnerability analysis is that no residual vulnerabilities exist that are exploitable by attackers with Basic Attack Potential as defined by the Certification Body in accordance with the guidance in the CEM.

10.7 Summary of Evaluation Results

The evaluation team's assessment of the evaluation evidence demonstrates that the claims in the ST are met, sufficient to satisfy the assurance activities specified in the claimed Protection Profiles. Additionally, the evaluation team's testing also demonstrated the accuracy of the claims in the ST.

The validation team's assessment of the evidence provided by the evaluation team is that it demonstrates that the evaluation team followed the procedures defined in the CEM, and correctly verified that the product meets the claims in the ST.

11 Validator Comments/Recommendations

The validators recommend that the consumer pay particular attention to the evaluated configuration of the TOE. As stated in the Clarification of Scope, the evaluated functionality is scoped exclusively to the security functional requirements specified in the Security Target, and the only evaluated functionality was that which was described by the SFRs claimed in the Security Target. All other functionality provided by the TOE needs to be assessed separately and no further conclusions can be drawn about its effectiveness.

Of note, while the TOE supports various networking protocols, including SSH, CIFS, NFS, HTTP, HTTPS, DHCP, SNMP, Fibre Channel, and iSCSI, among others, as noted in Section 6, Clarification of Scope, these protocols have not been examined as part of the required assurance activities and, therefore, no claims are made about the TOE's networking protocols. The only evaluated interface is the RS-232 interface. The customer should consider the impact of using the product's SSH or HTTPS interfaces for administration, with the understanding that the protection of user data in transit was not evaluated and the Security Target assumes that the environment is appropriately protected.

All other items and scope issues have been sufficiently addressed elsewhere in this document.

12 Security Target

The ST for this product's evaluation is *NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Security Target*, Version 1.0, 14 June 2021 [7].

13 Abbreviations and Acronyms

This section identifies abbreviations and acronyms used in this document.

AAR	Assurance Activities Report
AFF	All Flash FAS
AK	Authentication Key
BEV	Border Encryption Value
CAVP	Cryptographic Algorithm Validation Program
CC	Common Criteria for Information Technology Security Evaluation
CCTL	Common Criteria Testing Laboratory
CEM	Common Evaluation Methodology
CIFS	Common Internet File System
DEK	Data Encryption Key
DHCP	Dynamic Host Configuration Protocol
ETR	Evaluation Technical Report
FAS	Fabric Attached Storage
FC	Fibre Channel
FCoE	Fibre Channel over Ethernet
HA	High Availability
HDD	Hard disk drive
HTTP	Hyper Text Transfer Protocol
HTTPS	Hyper Text Transfer Protocol Secure
IT	Information Technology
NAS	Network Attached Storage
NFS	Network File System
NIST	National Institute of Standards and Technology
NSE	Network Storage Encryption
NVMe	Non-Volatile Memory express
OKM	Onboard Key Manager
PCL	Product Compliant List
SAN	Storage Area Network
SAR	Security Assurance Requirement
SED	Self-Encrypting Drive
SFR	Security Functional Requirement
SMB	Server Message Block
SNMP	Simple Network Management Protocol
SSD	Solid state drive
SSH	Secure Shell
ST	Security Target
SVM	Storage Virtual Machine
TCG	Trusted Computing Group
TOE	Target of Evaluation
TSF	TOE Security Functions
TSS	TOE Summary Specification

14 Bibliography

The validation team used the following documents to produce this VR:

- [1] Common Criteria for Information Technology Security Evaluation: Part 1: Introduction and general model, Version 3.1, Revision 5, April 2017
- [2] Common Criteria for Information Technology Security Evaluation: Part 2: Security functional components, Version 3.1, Revision 5, April 2017
- [3] Common Criteria for Information Technology Security Evaluation: Part 3: Security assurance requirements, Version 3.1, Revision 5, April 2017
- [4] Common Evaluation Methodology for Information Technology Security, Version 3.1, Revision 5, April 2017
- [5] collaborative Protection Profile for Full Drive Encryption – Authorization Acquisition, Version 2.0+Errata, 1 February 2019
- [6] Supporting Document – Mandatory Technical Document – Full Drive Encryption: Authorization Acquisition, Version 2.0+Errata 20190201, 1 February 2019
- [7] NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Security Target, Version 1.0, 14 June 2021 (ST)
- [8] ONTAP® 9.7 Commands: Manual Page Reference, November 2019
- [9] ONTAP® 9.7 NetApp Encryption Power Guide, June 2021
- [10] ONTAP® 9.7 System Administration Reference, April 2020
- [11] ONTAP® 9.7 Upgrade Express Guide, January 2020
- [12] ONTAP® 9.7 Upgrade and Revert/Downgrade Guide, April 2020
- [13] Evaluation Technical Report for NetApp Storage Encryption (NSE) Running ONTAP 9.7P13 Part 1 (Non-Proprietary) Version 1.0, 31 August 2021 (ETR P1)
- [14] Evaluation Technical Report for NetApp Storage Encryption (NSE) running ONTAP 9.7P13, Part 2 (Proprietary), Version 1.0, 31 August 2021 (ETR P2)
- [15] Assurance Activities Report for NetApp Storage Encryption (NSE) running ONTAP 9.7P13, Version 1.0, 31 August 2021 (AAR)
- [16] NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Common Criteria Test Report and Procedures, Version 1.0, 31 August 2021 (DTR)
- [17] NetApp Storage Encryption (NSE) running ONTAP 9.7P13 Vulnerability Assessment Version 1.0, 31 August 2021 (AVA)