



**ID-One eIDAS v1.0 in SSCD-6 configuration**

**Public Security Target**

**FQR No: 110 7796**

**FQR Issue: 2**

#### Legal Notice

---

© OT. All rights reserved.

*Specifications and information are subject to change without notice.*

*The products described in this document are subject to continuous development and improvement.*

*All trademarks and service marks referred to herein, whether registered or not in specific countries, are the properties of their respective owners.*

*\*\* Printed versions of this document are uncontrolled \*\**

## Table of contents

---

|          |                                                  |           |
|----------|--------------------------------------------------|-----------|
| <b>1</b> | <b>SECURITY TARGET INTRODUCTION</b>              | <b>10</b> |
| 1.1      | Purpose .....                                    | 10        |
| 1.2      | Objective of the security target.....            | 10        |
| 1.3      | Security Target identification .....             | 11        |
| 1.4      | TOE technical identification .....               | 11        |
| 1.5      | IC identification .....                          | 12        |
| <b>2</b> | <b>TOE OVERVIEW</b>                              | <b>13</b> |
| 2.1      | Product overview .....                           | 13        |
| 2.2      | TOE usages and major security features .....     | 14        |
| 2.3      | TOE type .....                                   | 15        |
| 2.4      | Required non-TOE hardware/software/firmware..... | 15        |
| <b>3</b> | <b>TOE DESCRIPTION</b>                           | <b>16</b> |
| 3.1      | TOE scope .....                                  | 16        |
| 3.2      | Block description.....                           | 16        |
| 3.2.1    | Integrated Circuit – NXP P60.....                | 17        |
| 3.2.2    | Low layer .....                                  | 17        |
| 3.2.2.1  | Basic Input and Output System (BIOS) .....       | 17        |
| 3.2.2.2  | Cryptography (Crypto).....                       | 17        |
| 3.2.3    | Tools modules .....                              | 17        |
| 3.2.3.1  | File System Management (FSM).....                | 17        |
| 3.2.3.2  | Secure Messaging (SM) .....                      | 17        |
| 3.2.3.3  | Pin Password Management (PPM).....               | 17        |
| 3.2.3.4  | Cryptography Key Management (CKM).....           | 17        |
| 3.2.3.5  | Authentication and Key Management (AKM) .....    | 17        |
| 3.2.3.6  | Toolbox.....                                     | 18        |
| 3.2.4    | Applicative modules.....                         | 18        |
| 3.2.4.1  | Terminal Authentication (TA).....                | 18        |
| 3.2.4.2  | Chip Authentication (CA).....                    | 18        |
| 3.2.4.3  | Supplemental Access Control (SAC) .....          | 18        |
| 3.2.4.4  | Digitally Blurred Image (DBI) .....              | 18        |
| 3.2.4.5  | Access Conditions Engine (ACE) .....             | 18        |

|          |                                                                                 |           |
|----------|---------------------------------------------------------------------------------|-----------|
| 3.2.5    | Operating System.....                                                           | 18        |
| 3.2.5.1  | Application Creation Engine.....                                                | 18        |
| 3.2.6    | Application layer .....                                                         | 19        |
| 3.2.6.1  | Resident Application .....                                                      | 19        |
| 3.2.6.2  | eDoc Application .....                                                          | 19        |
| 3.2.6.3  | eSign Application.....                                                          | 19        |
|          | Authentication Procedure .....                                                  | 19        |
| <b>4</b> | <b>TOE LIFE CYCLE</b>                                                           | <b>20</b> |
| 4.1      | Life cycle overview .....                                                       | 20        |
| 4.2      | Phase 1 “Development” (Step1 and 2) .....                                       | 22        |
| 4.3      | Phase 2 “Manufacturing” (Steps 3 to 5).....                                     | 22        |
| 4.4      | Phase 3 “Personalization of the TOE” .....                                      | 23        |
| 4.5      | Phase 4 “Operational Use” .....                                                 | 24        |
| <b>5</b> | <b>CONFORMANCE CLAIMS</b>                                                       | <b>25</b> |
| 5.1      | Common Criteria conformance .....                                               | 25        |
| 5.2      | Protection Profile conformance .....                                            | 25        |
| 5.2.1    | Correspondences and additions of SFR .....                                      | 28        |
| <b>6</b> | <b>SECURITY PROBLEM DEFINITION</b>                                              | <b>30</b> |
| 6.1      | Assets, objects, users and subjects.....                                        | 30        |
| 6.1.1    | Assets and objects.....                                                         | 30        |
| 6.1.1.1  | From PP SSCD-6.....                                                             | 30        |
| 6.1.1.2  | Others.....                                                                     | 30        |
| 6.1.2    | Users and subjects acting for users.....                                        | 31        |
| 6.1.2.1  | From PP SSCD - 6 .....                                                          | 31        |
| 6.1.2.2  | Others.....                                                                     | 31        |
| 6.2      | Threats .....                                                                   | 31        |
| 6.2.1    | Threat agents .....                                                             | 31        |
| 6.2.1.1  | From PP SSCD - 6 .....                                                          | 31        |
| 6.2.1.2  | Others.....                                                                     | 31        |
| 6.2.2    | Threats from PP SSCD - 6 .....                                                  | 32        |
| 6.2.2.1  | T.SCD_Divulg Storing, copying and releasing of the signature creation data..... | 32        |
| 6.2.2.2  | T.SCD_Derive Derive the signature creation data .....                           | 32        |
| 6.2.2.3  | T.Hack_Phys Physical attacks through the TOE interfaces .....                   | 32        |
| 6.2.2.4  | T.SVD_Forgery Forgery of the signature verification data .....                  | 32        |

|            |                                                            |                                                                     |           |
|------------|------------------------------------------------------------|---------------------------------------------------------------------|-----------|
| 6.2.2.5    | T.SigF_Misuse                                              | Misuse of the signature creation function of the TOE .....          | 32        |
| 6.2.2.6    | T.DTBS_Forgery                                             | Forgery of the DTBS/R.....                                          | 32        |
| 6.2.2.7    | T.Sig_Forgery                                              | Forgery of the electronic signature.....                            | 32        |
| 6.2.3      | Threats for Loading of Additional Code .....               |                                                                     | 32        |
| 6.2.3.1    | T.Unauthorized_Load                                        | .....                                                               | 32        |
| 6.2.3.2    | T.Bad_Activation                                           | .....                                                               | 33        |
| 6.2.3.3    | T.TOE_Identification_Forgery                               | .....                                                               | 33        |
| 6.2.4      | Threats for pre-personalization and personalization .....  |                                                                     | 33        |
| 6.2.4.1    | T.Pre_Perso                                                | .....                                                               | 33        |
| 6.2.4.2    | T.Perso                                                    | .....                                                               | 33        |
| <b>6.3</b> | <b>Organizational security policies .....</b>              |                                                                     | <b>34</b> |
| 6.3.1      | Organizational Security Policies from the PP SSCD – 6..... |                                                                     | 34        |
| 6.3.1.1    | P.CSP_QCert                                                | Qualified certificate.....                                          | 34        |
| 6.3.1.2    | P.QSign                                                    | Qualified electronic signatures.....                                | 34        |
| 6.3.1.3    | P.Sigy_SSCD                                                | TOE as secure signature creation device.....                        | 34        |
| 6.3.1.4    | P.Sig_Non-Repud                                            | Non-repudiation of signatures.....                                  | 34        |
| <b>6.4</b> | <b>Assumptions .....</b>                                   |                                                                     | <b>35</b> |
| 6.4.1      | Assumptions from the PP SSCD – 6.....                      |                                                                     | 35        |
| 6.4.1.1    | A.CGA                                                      | Trustworthy certificate generation application.....                 | 35        |
| 6.4.1.2    | A.SCA                                                      | Trustworthy signature creation application.....                     | 35        |
| 6.4.1.3    | A.CSP                                                      | Secure SCD/SVD management by CSP .....                              | 35        |
| <b>7</b>   | <b>SECURITY OBJECTIVES .....</b>                           |                                                                     | <b>36</b> |
| <b>7.1</b> | <b>Security Objectives for the TOE.....</b>                |                                                                     | <b>36</b> |
| 7.1.1      | Security Objectives from PP SSCD - 6.....                  |                                                                     | 36        |
| 7.1.1.1    | Relation to core PP SSCD KI.....                           |                                                                     | 36        |
| 7.1.1.2    | OT.Lifecycle_Security                                      | Lifecycle security .....                                            | 36        |
| 7.1.1.3    | OT.SCD_Auth_Imp                                            | Authorized SCD import .....                                         | 36        |
| 7.1.1.4    | OT.SCD_Secrecy                                             | Secrecy of the signature creation data.....                         | 36        |
| 7.1.1.5    | OT.Sig_Secure                                              | Cryptographic security of the electronic signature .....            | 36        |
| 7.1.1.6    | OT.Sigy_SigF                                               | Signature creation function for the legitimate signatory only ..... | 36        |
| 7.1.1.7    | OT.DTBS_Integrity_TOE                                      | DTBS/R integrity inside the TOE .....                               | 37        |
| 7.1.1.8    | OT.EMSEC_Design                                            | Provide physical emanations security .....                          | 37        |
| 7.1.1.9    | OT.Tamper_ID                                               | Tamper detection.....                                               | 37        |
| 7.1.1.10   | OT.Tamper_Resistance                                       | Tamper resistance .....                                             | 37        |
|            | OT.TOE_TC_DTBS_Imp                                         | Trusted channel of TOE for DTBS import.....                         | 37        |
|            | OT.TOE_TC_VAD_Imp                                          | Trusted channel of TOE for VAD export.....                          | 37        |

|            |                                                                                |           |
|------------|--------------------------------------------------------------------------------|-----------|
| 7.1.2      | Security Objectives for the Loading of Additional Code .....                   | 38        |
| 7.1.2.1    | OT.Secure_Load_ACode.....                                                      | 38        |
| 7.1.2.2    | OT.Secure_AC_Activation .....                                                  | 38        |
| 7.1.2.3    | OT.TOE_Identification .....                                                    | 38        |
| 7.1.3      | Security Objectives for pre-personalization and personalization.....           | 38        |
| 7.1.3.1    | OT.Pre_Perso.....                                                              | 38        |
| 7.1.3.2    | OT.Perso .....                                                                 | 39        |
| <b>7.2</b> | <b>Security objectives for the operational environment .....</b>               | <b>39</b> |
| 7.2.1      | Security objectives from PP SSCD-6 .....                                       | 39        |
| 7.2.1.1    | Relation to core ST SSCD KI .....                                              | 39        |
| 7.2.1.2    | OE.SCD/SVD_Auth_Gen Authorized SCD/SVD generation .....                        | 39        |
| 7.2.1.3    | OE.SCD_Secrecy SCD secrecy .....                                               | 39        |
| 7.2.1.4    | OE.SCD_Unique Uniqueness of the signature creation data.....                   | 39        |
| 7.2.1.5    | OE.SCD_SVD_Corresp Correspondence between SCD and SVD.....                     | 39        |
| 7.2.1.6    | OE.SVD_Auth Authenticity of the SVD.....                                       | 40        |
| 7.2.1.7    | OE.CGA_QCert Generation of qualified certificates .....                        | 40        |
| 7.2.1.8    | OE.SSCD_Prov_Service Authentic SCD provided by SSCD-provisioning service ..... | 40        |
|            | OE.HID_TC_VAD_Exp Trusted channel of HID for VAD export.....                   | 40        |
| 7.2.1.9    | OE.DTBS_Intend SCA sends data intended to be signed .....                      | 40        |
|            | OE.SCA_TC_DTBS_Exp Trusted channel of SCA for DTBS export .....                | 40        |
| 7.2.1.10   | OE.Signatory Security obligation of the signatory .....                        | 41        |
| <b>8</b>   | <b>EXTENDED COMPONENTS DEFINITION .....</b>                                    | <b>42</b> |
| 8.1        | Definition of the Family FPT_EMS .....                                         | 42        |
| 8.2        | Definition of the Family FAU_SAS .....                                         | 43        |
| <b>9</b>   | <b>SECURITY REQUIREMENTS .....</b>                                             | <b>45</b> |
| 9.1        | Security functional requirements from PP SSCD – 6.....                         | 45        |
| 9.1.1      | Cryptographic support (FCS) .....                                              | 45        |
| 9.1.1.1    | FCS_CKM.4 Cryptographic key destruction .....                                  | 45        |
| 9.1.1.2    | FCS_COP.1 Cryptographic operation .....                                        | 45        |
| 9.1.2      | User data protection (FDP) .....                                               | 46        |
| 9.1.2.1    | FDP_ACC.1/SCD_Import Subset access control.....                                | 46        |
| 9.1.2.2    | FDP_ACF.1/SCD_Import Security attribute based access control .....             | 47        |
| 9.1.2.3    | FDP_ACC.1/Signature_Creation Subset access control.....                        | 48        |
| 9.1.2.4    | FDP_ACF.1/Signature creation Security attribute based access control.....      | 48        |
| 9.1.2.5    | FDP_ITC.1/SCD Import of user data without security attributes.....             | 49        |

|            |                                                                                                                 |                                                                  |           |
|------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|-----------|
| 9.1.2.6    | FDP_UCT.1/SCD                                                                                                   | Basic data exchange confidentiality.....                         | 49        |
| 9.1.2.7    | FDP_RIP.1                                                                                                       | Subset residual information protection .....                     | 50        |
| 9.1.2.8    | FDP_SDI.2/Persistent                                                                                            | Stored data integrity monitoring and action .....                | 50        |
| 9.1.2.9    | FDP_SDI.2/DTBS                                                                                                  | Stored data integrity monitoring and action.....                 | 50        |
| 9.1.3      | Identification and authentication (FIA).....                                                                    |                                                                  | 51        |
| 9.1.3.1    | FIA_UID.1                                                                                                       | Timing of identification.....                                    | 51        |
| 9.1.3.2    | FIA_UAU.1                                                                                                       | Timing of authentication .....                                   | 51        |
| 9.1.3.3    | FIA_AFL.1                                                                                                       | Authentication failure handling .....                            | 52        |
| 9.1.4      | Security Management (FMT) .....                                                                                 |                                                                  | 52        |
| 9.1.4.1    | FMT_SMR.1                                                                                                       | Security roles.....                                              | 52        |
| 9.1.4.2    | FMT_SMF.1                                                                                                       | Security management functions.....                               | 53        |
| 9.1.4.3    | FMT_MOF.1                                                                                                       | Management of security functions behavior.....                   | 53        |
| 9.1.4.4    | FMT_MSA.1/Admin                                                                                                 | Management of security attributes .....                          | 53        |
| 9.1.4.5    | FMT_MSA.1/Signatory                                                                                             | Management of security attributes .....                          | 54        |
| 9.1.4.6    | FMT_MSA.2                                                                                                       | Secure security attributes .....                                 | 54        |
| 9.1.4.7    | FMT_MSA.3                                                                                                       | Static attribute initialisation.....                             | 54        |
| 9.1.4.8    | FMT_MSA.4                                                                                                       | Security attribute value inheritance.....                        | 55        |
| 9.1.4.9    | FMT_MTD.1/Admin                                                                                                 | Management of TSF data.....                                      | 55        |
| 9.1.4.10   | FMT_MTD.1/Signatory                                                                                             | Management of TSF data .....                                     | 55        |
| 9.1.5      | Protection of the TSF (FPT) .....                                                                               |                                                                  | 56        |
| 9.1.5.1    | FPT_EMS.1                                                                                                       | TOE Emanation .....                                              | 56        |
| 9.1.5.2    | FPT_FLS.1                                                                                                       | Failure with preservation of secure state.....                   | 56        |
| 9.1.5.3    | FPT_PHP.1                                                                                                       | Passive detection of physical attack.....                        | 57        |
| 9.1.5.4    | FPT_PHP.3                                                                                                       | Resistance to physical attack.....                               | 57        |
| 9.1.5.5    | FPT_TST.1                                                                                                       | TSF testing .....                                                | 57        |
| 9.1.5.6    | FTP_ITC.1/SCD                                                                                                   | Inter-TSF trusted channel .....                                  | 58        |
|            | FDP_UIT.1/DTBS                                                                                                  | Data exchange integrity .....                                    | 58        |
|            | FTP_ITC.1/VAD                                                                                                   | Inter-TSF trusted channel – TC Human Interface Device .....      | 59        |
|            | FTP_ITC.1/DTBS                                                                                                  | Inter-TSF trusted channel – Signature Creation Application ..... | 59        |
| <b>9.2</b> | <b>Security Functional Requirements for Manufacturing, Personalization and Loading of Additional Code .....</b> |                                                                  | <b>60</b> |
| 9.2.1      | SFRs for additional code.....                                                                                   |                                                                  | 60        |
| 9.2.1.1    | FAU_STG.2/MP_Add_code                                                                                           | Guarantees of audit data availability .....                      | 60        |
| 9.2.1.2    | FCS_CKM.1/MP_Add_code                                                                                           | Cryptographic key generation.....                                | 61        |
| 9.2.1.3    | FCS_COP.1/MP_ENC_Add_code                                                                                       | Cryptographic operation .....                                    | 61        |
| 9.2.1.4    | FCS_COP.1/MP_MAC_Add_code                                                                                       | Cryptographic operation.....                                     | 61        |
| 9.2.1.5    | FDP_UIT.1/MP_Add_code                                                                                           | Data exchange integrity.....                                     | 62        |

|          |                                   |                                                 |    |
|----------|-----------------------------------|-------------------------------------------------|----|
| 9.2.1.6  | FMT_MTD.1/MP_Add_code             | Management of TSF data                          | 62 |
| 9.2.1.7  | FMT_MTD.1/MP_KEY_READ_Add_code    | Management of TSF data                          | 62 |
| 9.2.1.8  | FMT_SMR.1/MP_Add_Code             | Security roles                                  | 62 |
| 9.2.1.9  | FPT_EMS.1/MP_Add_code             | TOE Emanation                                   | 63 |
| 9.2.1.10 | FTP_ITC.1/MP_Add_code             | Inter-TSF trusted channel                       | 63 |
| 9.2.2    | Manufacturing and Personalization |                                                 | 63 |
| 9.2.2.1  | FCS_CKM.1/MP                      | Cryptographic key generation                    | 63 |
| 9.2.2.2  | FCS_COP.1/MP_ENC_3DES             | Cryptographic operation                         | 64 |
| 9.2.2.3  | FCS_COP.1/MP_ENC_AES              | Cryptographic operation                         | 64 |
| 9.2.2.4  | FCS_COP.1/MP_MAC_3DES             | Cryptographic operation                         | 64 |
| 9.2.2.5  | FCS_COP.1/MP_MAC_AES              | Cryptographic operation                         | 64 |
| 9.2.2.6  | FCS_COP.1/MP_AUTH_3DES            | Cryptographic operation                         | 65 |
| 9.2.2.7  | FCS_COP.1/MP_AUTH_AES             | Cryptographic operation                         | 65 |
| 9.2.2.8  | FCS_COP.1/MP_SHA                  | Cryptographic operation                         | 65 |
| 9.2.2.9  | FDP_ACC.2/MP                      | Complete access control                         | 65 |
| 9.2.2.10 | FDP_ACF.1/MP                      | Security attribute based access control         | 66 |
| 9.2.2.11 | FDP_ITC.1/MP                      | Import of user data without security attributes | 66 |
| 9.2.2.12 | FDP_UCT.1/MP                      | Basic data exchange confidentiality             | 67 |
| 9.2.2.13 | FDP_UIT.1/MP                      | Data exchange integrity                         | 67 |
| 9.2.2.14 | FIA_AFL.1/MP                      | Authentication failure handling                 | 67 |
| 9.2.2.15 | FIA_UAU.1/MP                      | Timing of authentication                        | 68 |
| 9.2.2.16 | FIA_UID.1/MP                      | Timing of identification                        | 68 |
| 9.2.2.17 | FIA_UAU.4/MP_3DES                 | Single-use authentication mechanisms            | 68 |
| 9.2.2.18 | FIA_UAU.4/MP_AES                  | Single-use authentication mechanisms            | 68 |
| 9.2.2.19 | FIA_UAU.5/MP_3DES                 | Multiple authentication mechanisms              | 68 |
| 9.2.2.20 | FIA_UAU.5/MP_AES                  | Multiple authentication mechanisms              | 69 |
| 9.2.2.21 | FMT_MTD.1/MP                      | Management of TSF data                          | 69 |
| 9.2.2.22 | FTP_ITC.1/MP                      | Inter-TSF trusted channel                       | 69 |
| 9.2.2.23 | FMT_MTD.1/MP_INI_ENA              | Management of TSF data                          | 69 |
| 9.2.2.24 | FMT_MTD.1/MP_INI_DIS              | Management of TSF data                          | 70 |
| 9.2.2.25 | FMT_MTD.1/MP_KEY_READ             | Management of TSF data                          | 70 |
| 9.2.2.26 | FMT_MTD.1/MP_KEY_WRITE            | Management of TSF data                          | 70 |
| 9.2.2.27 | FAU_SAS.1/MP                      | Audit storage                                   | 70 |
| 9.2.2.28 | FMT_SMF.1/MP                      | Specification of Management Functions           | 70 |
| 9.2.2.29 | FMT_SMR.1/MP                      | Security Roles                                  | 70 |
| 9.2.2.30 | FPT_EMS.1/MP                      | TOE Emanation                                   | 71 |



|           |                                                           |           |
|-----------|-----------------------------------------------------------|-----------|
| <b>10</b> | <b>TOE SUMMARY SPECIFICATION</b>                          | <b>72</b> |
| 10.1      | TOE Summary Specification .....                           | 72        |
| <b>11</b> | <b>RATIONALES</b>                                         | <b>75</b> |
| 11.1      | Security objectives and Security Problem Definition ..... | 75        |
| 11.2      | Security objectives rationale .....                       | 75        |
| 11.2.1    | Security objectives backtracking.....                     | 75        |
| 11.2.2    | Security objectives sufficiency .....                     | 77        |
| 11.3      | Security requirements and security objectives .....       | 77        |
| 11.3.1    | Rationale tables of Security Objectives and SFRs .....    | 77        |
| 11.3.2    | Rationale of Security Objectives and SFRs.....            | 80        |
| <b>12</b> | <b>REFERENCES</b>                                         | <b>81</b> |
|           | Specifications .....                                      | 81        |
|           | Oberthur Specifications .....                             | 81        |
|           | Protection Profiles.....                                  | 81        |
|           | Chips References .....                                    | 82        |
|           | Standards.....                                            | 82        |
| CC        | 82                                                        |           |
| <b>13</b> | <b>ACRONYMS</b>                                           | <b>84</b> |
| <b>14</b> | <b>LIST OF TABLES AND FIGURES</b>                         | <b>85</b> |
|           | Figures 85                                                |           |
|           | Tables 85                                                 |           |

## 1 SECURITY TARGET INTRODUCTION

### 1.1 Purpose

The objective of this document is to present the Public Security Target SSCD-6 of the ID-One ePass V3 Full EAC v2 product on NXP components from P60 family.

### 1.2 Objective of the security target

This security target describes the security needs for ID-One ePass V3 Full EAC v2 product. The product is conforming to PP SSCD-6 and adds requirements for prepersonalization and personalization.

This security target aims to satisfy the requirements of Common Criteria level EAL5 augmented as defined in §0 in defining the security enforcing functions of the Target Of Evaluation and describing the environment in which it operates.

The objectives of this Security Target are:

- To describe the Target of Evaluation (TOE), its life cycle and to position it in the smart card life cycle.
- To describe the security environment of the TOE including the assets to be protected and the threats to be countered by the TOE and by the operational environment during the platform active phases.
- To describe the security objectives of the TOE and its supporting environment in terms of integrity and confidentiality of sensitive information. It includes protection of the TOE (and its documentation) during the product active phases.
- To specify the security requirements which include the TOE functional requirements, the TOE assurance requirements and the security requirements for the environment.
- To describe the summary of the TOE specification including a description of the security functions and assurance measures that meet the TOE security requirements.
- To present evidence that this ST is a complete and cohesive set of requirements that the TOE provides on an effective set of IT security countermeasures within the security environment, and that the TOE summary specification addresses the requirements.

### 1.3 Security Target identification

|                    |                                                                                                                                                                                                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title              | ID-One eIDAS v1.0 in SSCD-6 configuration Security Target                                                                                                                                                      |
| Editor             | Oberthur Technologies                                                                                                                                                                                          |
| CC version         | 3.1 revision 4                                                                                                                                                                                                 |
| EAL                | EAL5 augmented with AVA_VAN.5 and ALC_DVS.2                                                                                                                                                                    |
| PP                 | Protection profile for secure signature creation device — Part 6: Extension for device with key import and trusted communication with signature creation application, version 1.0.4, 2013-04-03 BSI-CC-PP-0076 |
| ST Reference       | FQR 110 7735 Issue 4                                                                                                                                                                                           |
| ITSEF              | LETI                                                                                                                                                                                                           |
| Certification Body | ANSSI                                                                                                                                                                                                          |
| Evaluation Scheme  | FR                                                                                                                                                                                                             |

Table 1-1 - General Identification

### 1.4 TOE technical identification

|                                                          |                                                                            |
|----------------------------------------------------------|----------------------------------------------------------------------------|
| Product name                                             | ID-One ePass V3 Full EAC v2                                                |
| Commercial name of TOE 1                                 | ID-One eIDAS v1.0 in SSCD-6 configuration on NXP P60x080 PVC/PVG           |
| IC type                                                  | '6C14' (P60D080 VC)<br>'6014' (P60D080 VG)<br>'6019' (P60C080 VG)          |
| Additional code 1<br>Mandatory generic<br>Identification | '082456FF412E4D1EC087005B56A9A2CAC0B6558F4CAA041D8B5A69345559B562A6F4C8E'  |
| Additional code 2<br>Optional DBI<br>Identification      | '082844FFE339C30BC6A81162413612FE2698284FA6CD28AA5CF5257A20B83611E58E9BEE' |

Table 1-2 - TOE technical identification

#### Nota bene

- The additional code is encrypted with the LSK key
- An optional additional code (functional) can be loaded. This additional code, relative to the Digitally Blurred Image process (DBI), is part of the product, but not in the scope of the evaluation.

## 1.5 IC identification

|                        |                                                                                   |
|------------------------|-----------------------------------------------------------------------------------|
| IC Reference           | NXP P60 IC                                                                        |
| TOE 1                  | NXP P60x080/052/040 PVC/PVG <a href="#">[R35]</a><br>EAL6 + ALC_FLR.1 + ASE_TSS.2 |
| Communication protocol | Contact and contactless and dual                                                  |
| Memory                 | ROM                                                                               |
| Chip Manufacturer      | NXP Semiconductors                                                                |

**Table 1-3 - Chip Identification**

The use of the word 'PIN' throughout this document can always refer to a numerical as well as to a biometric PIN.

## 2 TOE OVERVIEW

### 2.1 Product overview

The product **ID-One ePass V3 Full EAC v2** is a multi-applicative native software, embedded in contact and/or contactless smart card integrated circuits of different form factors. During the pre-personalization and personalization phases, the product can be configured to serve different use cases.


The product supports the storage and retrieval of structured information compliant to the Logical Data Structure as specified in [R2]. It also provides standard authentication protocols, namely Basic Access Control [R27], Supplementary Access Control [R33], Extended Access Control ([R28] and [R29]), the Basic Access Protection [R9] and Extended Access Protection [R9]. Additionally, it supplies PIN management [R36] and signature services [R37].

The product is intended to host 4 types of applications: MRTD-IDL, eID, **eSign** and Dauth. Moreover, further configuration may also be done to each type of application to serve use cases other than those behaviorally defined in the referenced normative documents.

This product is embedded on the IC described in § 1.5.

The product is closed. The set of available applications is fully configured at the end of the personalization phase.

The ID-One ePass V3 Full EAC v2 architecture can be viewed as shown in the following picture:

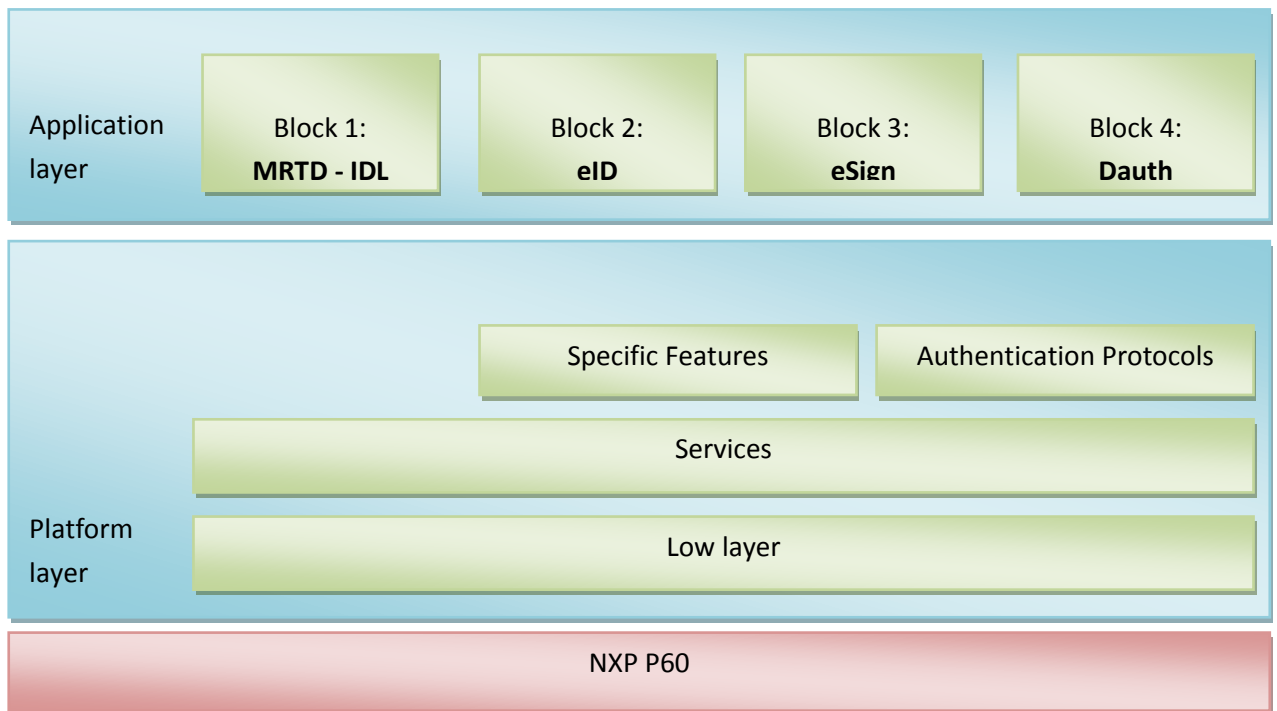

**Figure 1 – Product architecture**

The TOE is a subset of the product dedicated to the Signature Application. The eSign application contains the following 5 configurations:

| eSign Configurations | PP                                                                         | Targeted EAL         |
|----------------------|----------------------------------------------------------------------------|----------------------|
| eSign SSCD-2         | SSCD 2 CEN/EN 419 211-2<br>(ex CEN/EN 14169-2) (BSI-CC-PP-0059-2009-MA-01) | EAL5 + DVS.2 + VAN.5 |
| eSign SSCD-3         | SSCD 3 CEN/EN 419 211-3<br>(ex CEN/EN 14169-3) (BSI-CC-PP-0075-2012)       | EAL5 + DVS.2 + VAN.5 |
| eSign SSCD-4         | SSCD 4 CEN/EN 419 211-4<br>(ex CEN/EN 14169-4) (BSI-CC-PP-0071-2012)       | EAL5 + DVS.2 + VAN.5 |
| eSign SSCD-5         | SSCD 5 CEN/EN 419 211-5<br>(ex CEN/EN 14169-5) (BSI-CC-PP-0072-2012)       | EAL5 + DVS.2 + VAN.5 |
| eSign SSCD-6         | SSCD 6 CEN/EN 419 211-6<br>(ex CEN/EN 14169-6)(BSI-CC-PP-0076-2013)        | EAL5 + DVS.2 + VAN.5 |

Table 2-1 - eSign Configurations

The scope of this TOE encompasses configuration SSCD-6 and the features it relies on.

The eSign application is configured during the pre-personalization phase, using the Application Creation Engine. The other secure applications present in the product (MRTD-DL, eID and Dauth) are not in this TOE. They are evaluated separately.

## 2.2 TOE usages and major security features

The eSign application provides different services that make each card a secure signature creation device as defined in [\[R23\]](#).

*The TOE major security features in the operational phase are the functions:*

- (1) *to import signature creation data (SCD) and, optionally, the correspondent signature-verification data (SVD),*
- (2) *to, optionally, receive and store certificate info (only if personalizer creates it),*
- (3) *to switch the TOE from a non-operational state to an operational state, and*
- (4) *if in an operational state, to create digital signatures for data with the following steps (conformant to [\[R3\]](#), [\[R4\]](#), and [\[R22\]](#); described in Section §5.3) :*
  - (a) *authenticate the signatory (using the RAD verification) and determine its intent to sign,*
  - (b) *receive data to be signed or a unique representation thereof (DTBS/R) through a trusted channel with the SCA,*

*(c) apply an appropriate cryptographic signature creation function using the selected SCD to the DTBS/R.*

It also allows the authentication of one (or several) administrator(s) of the TOE who may have special rights to administrate the SCD and SVD (import), using either symmetric or asymmetric mechanisms or PIN verification.

## 2.3 TOE type

The TOE (Target of evaluation) is a smartcard based on NXP chip. It is a combination of hardware and software configured to securely import, use and manage signature creation data (SCD). The SSCD protects the SCD during its whole life cycle as to be used in a signature creation process solely by its signatory.

The TOE comprises:

- Circuitry of the chip (the integrated circuit, IC)
- IC Dedicated Software with the parts IC Dedicated Test Software and IC Dedicated Support Software
- IC Embedded Software (operating system)
- eSign application
- Associated guidance documentation

## 2.4 Required non-TOE hardware/software/firmware

N/A

### 3 TOE DESCRIPTION

#### 3.1 TOE scope

The following diagram describes the architecture of the product and highlights (in orange) the components of the product that are part of the TOE.

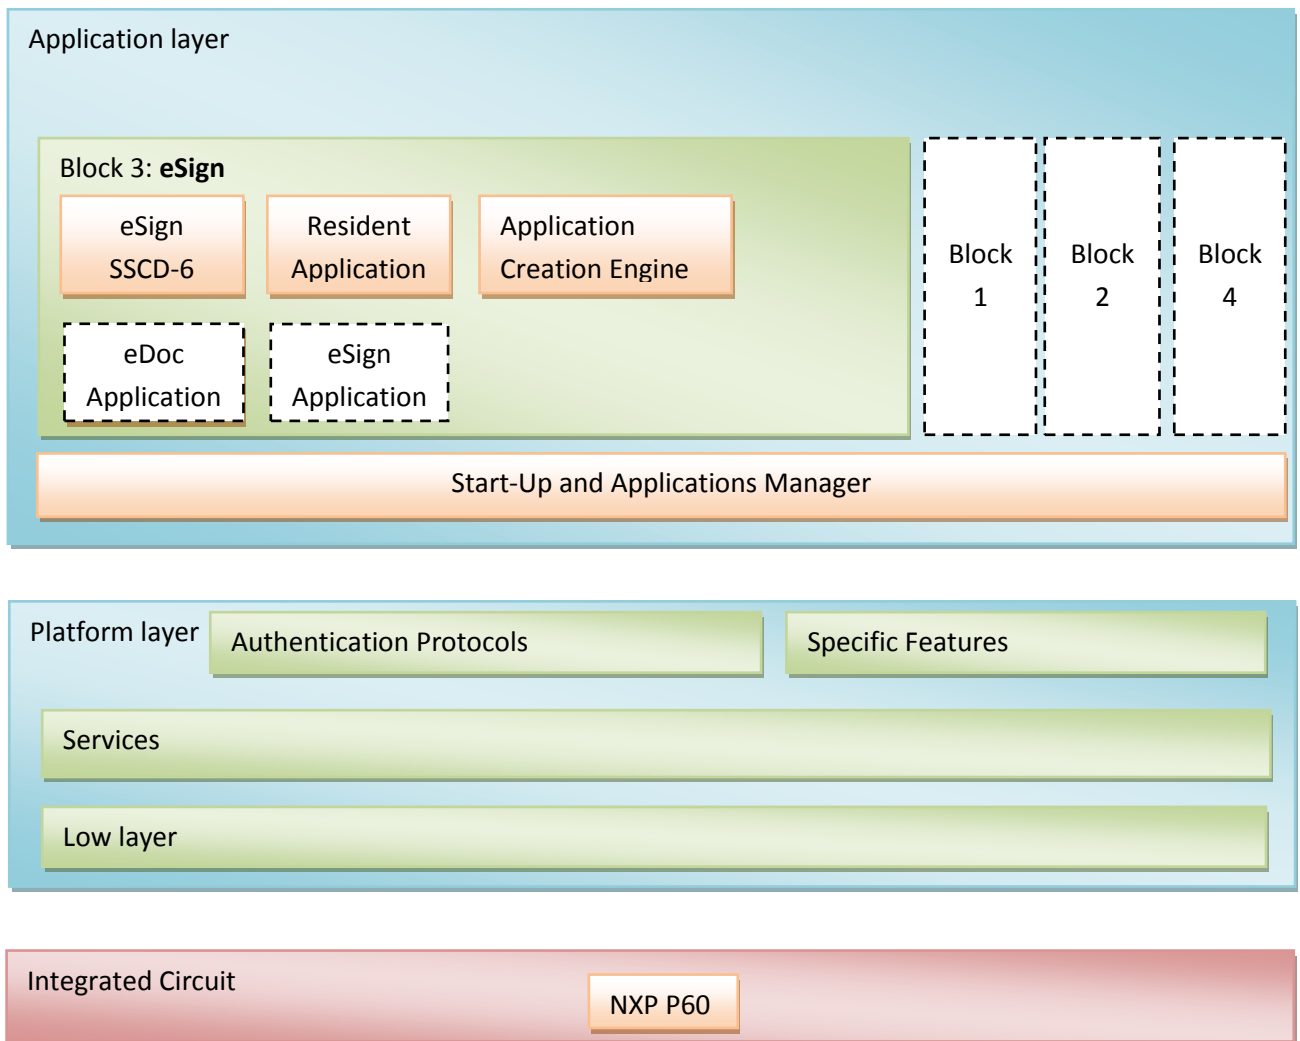


Figure 2 - Product architecture with TOE components

#### 3.2 Block description

This section provides a quick overview of the functionalities of the components of the product. Note that the Resident Application, the eDoc block, the whole Platform Layer and the IC provide functionalities to all the applicative blocks 1 to 4.



### 3.2.1 Integrated Circuit – NXP P60

The TOE is embedded on NXP chip, as presented in Table 1-3 - Chip Identification. More information on the chips is given in the related certification report [\[R35\]](#) and related Security Target.

### 3.2.2 Low layer

#### 3.2.2.1 Basic Input and Output System (BIOS)

The BIOS module provides access management (read/write) functionalities to upper-layer application. It also provides exception and communication functionalities.

#### 3.2.2.2 Cryptography (Crypto)

The Cryptography module provides secure cryptographic functionalities to upper-layer applications.

### 3.2.3 Tools modules

#### 3.2.3.1 File System Management (FSM)

The FSM module manages files and data objects according to ISO 7816-4 and 7816-9.

#### 3.2.3.2 Secure Messaging (SM)

The SM module provides functionalities to encrypt/decrypt data for secure communication in pre-personalization, personalization and operational use phase.

#### 3.2.3.3 Pin Password Management (PPM)

The PPM module provides functionalities for numeric passwords and biometric templates management. The passwords that can be used in connection with the eSign application are a global PIN, PUK, CAN (card access number written on the card where the eSign application is installed on) and the eSign PIN, called “RAD” in this Security Target. The use of the words ‘PIN’ throughout this document refers to a classical PIN as well as to a biometric password.

The RAD management is in the scope of this evaluation. The management of the other PINs and passwords not directly related to the signature application is evaluated separately.

#### 3.2.3.4 Cryptography Key Management (CKM)

The CKM module is responsible for asymmetric cryptography key management and asymmetric cryptography operations.

#### 3.2.3.5 Authentication and Key Management (AKM)

This module supplies:

- Symmetric Key management
- Access Control for ‘Change MSK’ and ‘PUT KEY’ APDU

- Authentication and secure messaging to be used by the application integrating this module in Prepersonalization and Personalization phases, based on Global Platform standard

### **3.2.3.6 Toolbox**

The Toolbox module provides different kind of services to other modules.

## **3.2.4 Applicative modules**

### **3.2.4.1 Terminal Authentication (TA)**

The TA module processes the Terminal Authentication (v1 and v2) mechanism. Terminal Authentication v2 is part of the EACv2 procedure.

### **3.2.4.2 Chip Authentication (CA)**

The CA module processes the Chip Authentication (v1 and v2) mechanism. Chip Authentication v2 is part of the EACv2 procedure.

### **3.2.4.3 Supplemental Access Control (SAC)**

The SAC module provides functionalities to process the PACE v2 mechanism.

### **3.2.4.4 Digitally Blurred Image (DBI)**

The Digital Blurred Image module allows the blurring of a JPG file stored in a transparent file during the personalization phase. This functionality is optionally loaded with additional code.

### **3.2.4.5 Access Conditions Engine (ACE)**

The ACE module is in charge of the verification of the Access Conditions of an object (file, key and PIN) when an application tries to access this object.

## **3.2.5 Operating System**

### **3.2.5.1 Application Creation Engine**

The Application Creation Engine is a complete set of commands used to personalize the card and its application(s). It includes:

- Administrative services for card configuration and life cycle management, key storage, pin storage and data storage.
- Storage of the Active Authentication Key (ECC and RSA Keys)
- Storage of multiple Chip Authentication Keys under the ADF (supporting ECC and RSA Keys)
- Storage of Trusted DL Root Keys under the ADF.
- Storage of CVCA Keys under the Master File.
- Storage of CVCA Keys under each ADF.

### 3.2.6 Application layer

#### 3.2.6.1 Resident Application

The Resident Application is a complete set of commands, which allows the management of the card in the pre-personalization phase.

It supports the execution of an Authentication Procedure. Possible implementations include PACE or PACE with EACv2 (which encompasses Terminal Authentication v2 and Chip Authentication v2).

#### 3.2.6.2 eDoc Application

The eDoc Application is a command dispatcher that is used only when the product is also hosting other applications than eSign. If only the eSign application is present on the card, this application is inactive: the eSign application directly receives all the commands if it has been selected before.

#### 3.2.6.3 eSign Application

The eSign application is a complete set of commands used for eSign application. This includes the management of the RAD and the signature keys, and the signing operation.

#### *Authentication Procedure*

In the rest of the document, especially in the section SFRs, Authentication Procedure means PACE, EAC, Terminal Authentication, Chip Authentication, Verify PIN or a combination of these.

Note that PACE, EAC, Terminal Authentication and Chip Authentication have already been certified in previous projects. Verify PIN is part of this evaluation (RAD Management).

## 4 TOE LIFE CYCLE

### 4.1 Life cycle overview

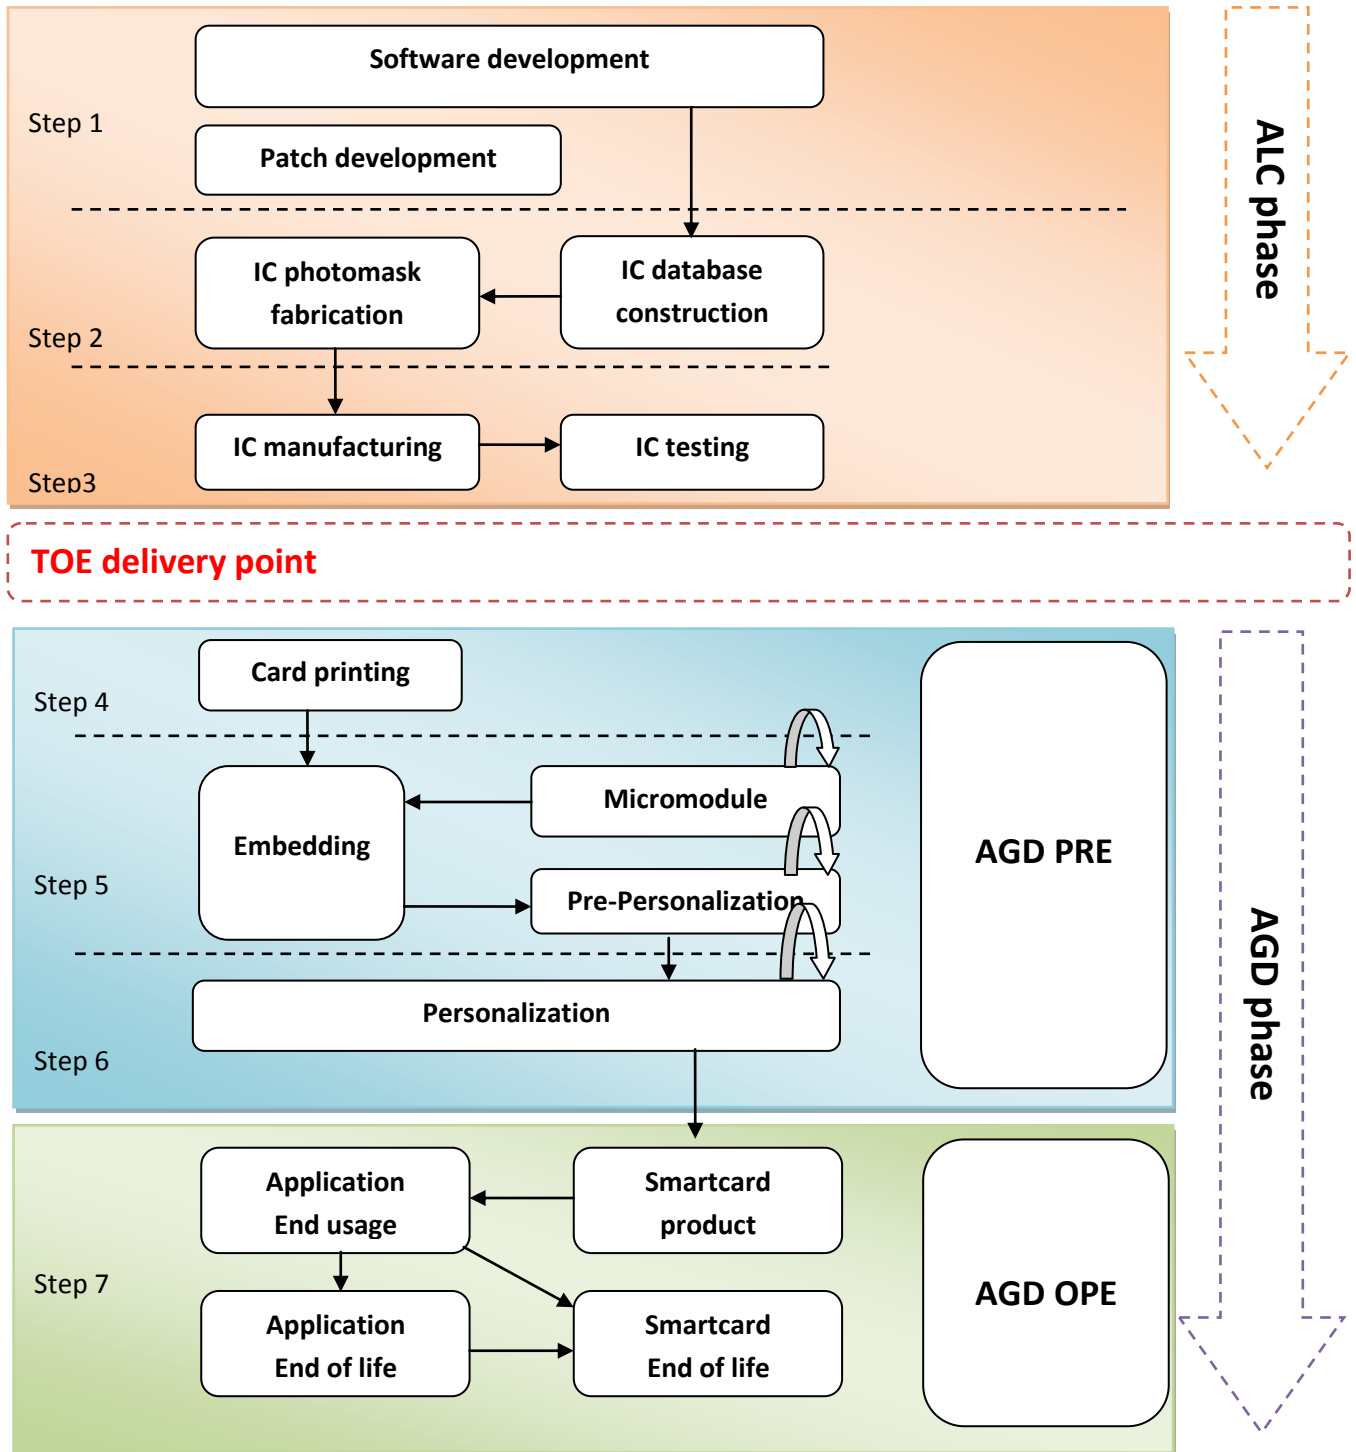


Figure 3 - TOE Lifecycle

The table below presents the roles involved in the development, manufacturing and personalization of the TOE:

| Roles                 | Subject                                                      |
|-----------------------|--------------------------------------------------------------|
| IC developer          | NXP Semiconductors                                           |
| IC Manufacturer       | NXP Semiconductors                                           |
| TOE developer         | Oberthur Technologies                                        |
| Manufacturer          | NXP Semiconductors<br>Oberthur Technologies or another agent |
| Pre-personalizer      | Oberthur Technologies or another agent                       |
| Personalization agent | Oberthur Technologies or another agent                       |

**Table 4-1 - Roles identification on the life cycle**

The table below presents the subjects following TOE life cycle steps in accordance with the standard smart card life cycle [R26] and the Protection Profile life cycle. The table is divided into the phases, the TOE delivery point and the coverage:

| Steps                     | Phase           | Subject                               | Covered by       | Sites                         |
|---------------------------|-----------------|---------------------------------------|------------------|-------------------------------|
| Step 1                    | Development     | Oberthur Technologies                 | ALC R&D Sites    | Pessac and Colombes           |
| Step 2                    | Development     | NXP Semiconductors                    | IC certification | See IC certification document |
| Step 3                    | Manufacturing   | NXP Semiconductors                    | IC certification | See IC certification document |
| <b>TOE delivery point</b> |                 |                                       |                  |                               |
| Step 4                    | Manufacturing   | eSign Manufacturer (Pre-personalizer) | AGD_PRE          |                               |
| Step 5                    | Manufacturing   | eSign Manufacturer (Pre-personalizer) | AGD_PRE          |                               |
| Step 6                    | Personalization | Personalization agent                 | AGD_PRE          |                               |
| Step 7                    | Operational Use | End user                              | AGD_OPE          |                               |

**Table 4-2 - Subjects identification following life cycle steps**

## 4.2 Phase 1 “Development” (Step1 and 2)

(Step1) The TOE is developed in phase 1. The IC developer develops the integrated circuit, the IC Dedicated Software and the guidance documentation associated with these TOE components.

(Step2) The TOE developer uses the guidance documentation for the integrated circuit and the guidance documentation for relevant parts of the IC Dedicated Software and develops the IC Embedded Software (operating system), the eSign application and the guidance documentation associated with these TOE components.

The manufacturing documentation of the IC including the IC Dedicated Software and the Embedded Software in the non-volatile non-programmable memories is securely delivered to the IC manufacturer. The IC Embedded Software in the non-volatile programmable memories, the eSign application and the guidance documentation are securely delivered to the Manufacturer.

## 4.3 Phase 2 “Manufacturing” (Steps 3 to 5)

(Step3) In a first step, the TOE integrated circuit is produced containing the secure signature creation device’s chip Dedicated Software and the parts of the secure signature creation device’s chip Embedded Software in the non-volatile non-programmable memories (ROM). The IC manufacturer writes the IC Identification Data onto the chip to control the IC as secure signature creation device material during the IC manufacturing and the delivery process to the Manufacturer. The IC is securely delivered from the IC manufacture to the Manufacturer. If necessary, the IC manufacturer adds the parts of the IC Embedded Software in the non-volatile programmable memories (for instance EEPROM). The IC manufacturer adds initialization data in EEPROM and keys (MSK, LSK).

### TOE delivery point

(Step4) The Manufacturer combines the IC with hardware for the contact based / contactless interface in the secure signature creation device unless the secure signature creation device consists of the card only.

(Step5) Pre-personalization phase

The Manufacturer

- (i) adds the IC Embedded Software or part of it and the additional source code in the non-volatile programmable memories if necessary,
- (ii) creates the eSign application, and
- (iii) equips the secure signature creation device’s chips with pre-personalization Data.

The pre-personalized secure signature creation device together with the IC Identifier is securely delivered from the Manufacturer to the Personalization Agent. The Manufacturer also provides the relevant parts of the guidance documentation to the Personalization Agent.

Additional code loading is performed in Pre-personalization phase encrypted with the LSK. It is compliant to ANSSI Note 6 [\[R61\]](#).

The additional code loading process is performed by the Pre-personalizer in the following steps, via the Command LOAD SECURE:

- Additional code generation
- MSK authentication
- LSK derivation
- Memory area definition
- Loading of the additional code
- Secure activation of the additional code

The additional code loading is performed before the creation of the MF file during Pre-personalization.

Identification of the additional code loading is given in Table 1-2 - TOE technical identification .

The additional code is generated by Oberthur Technologies: developed, compiled, ciphered and signed. After generation, it is sent to the eSign manufacturer to load to in the (initial) TOE.

#### **Loading of the additional code**

The additional code is loaded to the (initial) TOE by the Pre-personalizer, who shall authenticate itself to the TOE beforehand. Upon reception, the (initial) TOE checks it has been generated by Oberthur Technologies (by verifying the signature) before activating it.

#### **Identification of the TOE**

After successful loading and activation of the additional code, the TOE updates its identification data to reflect the presence of the additional code.

Once the additional code(s) is (are) loaded, the following operations should be processed:

- Master File Creation
- Card's Personalization Key Storage under Master File using PUT KEY command (see ISK [\[R41\]](#))
- CPLC Data Storage
- Application Creation (Create eSign ADF)
- eSign's Personalization Key Storage under eSign ADF
- Set the current life phase to Personalization Phase
- Signature key is possibly imported

Keys are loaded encrypted with DEC key and potentially additionally with Secure Messaging.

## **4.4 Phase 3 “Personalization of the TOE”**

(Step 6) Personalization of the Secure Signature Device Creation

The personalization of the SSCD includes:

- Empty PIN container
- Empty key container
- Empty file with EF Identifier 0x0119
- If signature key was not imported during the Prepersonalisation (Step 5), it is imported at this point

Some production steps, e.g. Step 5 (ii) and (iii) in Phase 2, may also take place in the Phase 3.

Keys are loaded encrypted with DEC key and potentially additionally with Secure Messaging.

#### 4.5 Phase 4 “Operational Use”

(Step 7) The TOE is used as a signing document by a user to sign transactions in the « Operational Use » phase.

Note that the personalization process and its environment may depend on specific security needs of an issuing State or Organization. All production, generation and installation procedures after TOE delivery up to the “Operational Use” (phase 4) have to be considered in the product evaluation process under AGD assurance class.



## 5 CONFORMANCE CLAIMS

### 5.1 Common Criteria conformance

This Security Target (ST) claims conformance to the Common Criteria version 3.1 revision 4 [\[R58\]](#), [\[R59\]](#) and [\[R60\]](#).

The conformance to the CC is claimed as follows:

| CC     | Conformance Claim                                                                                                                                                                                                          |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part 1 | Strict conformance                                                                                                                                                                                                         |
| Part 2 | Conformance with extensions: <ul style="list-style-type: none"> <li>- FPT_EMS.1 “TOE Emanation” (defined in <a href="#">[R26]</a>)</li> <li>- FAU_SAS.1 “Audit data storage” (defined in <a href="#">[R26]</a>)</li> </ul> |
| Part 3 | Conformance with package EAL5 augmented with <ul style="list-style-type: none"> <li>- AVA_VAN.5 “Advanced methodical vulnerability analysis”</li> <li>- ALC_DVS.2 “Sufficiency of security measures”</li> </ul>            |

**Table 5-1 - Conformance Claim**

### 5.2 Protection Profile conformance

The Security Target claims strict conformance to the following Protection Profile written in CC version 3.1 revision 3: Protection profiles for secure signature creation device – Part 6: Extension for device with key import and trusted communication with signature creation application. Version 1.0.4, 2013-04-03.

The following tables present the correspondence between the information from the SSCD-6 PP and the information in this security target and when relevant the additions (in red) of the SFRs of the Protection Profile. No iterations have been performed.

| From PP SSCD – 6                           | In this ST      |
|--------------------------------------------|-----------------|
| <b>Assets and objects</b>                  |                 |
| SCD                                        | SCD             |
| SVD                                        | SVD             |
| DTBS and DTBS/R                            | DTBS and DTBS/R |
|                                            | RAD             |
|                                            | TOE-ID          |
|                                            | CPLC Data       |
| <b>Users and subjects acting for users</b> |                 |
| S.User                                     | S.User          |

|                                         |                                                                                            |
|-----------------------------------------|--------------------------------------------------------------------------------------------|
| S.Admin                                 | S.Admin                                                                                    |
| Signatory (S.Sigy, R.Sigy)              | Signatory (S.Sigy, R.Sigy)                                                                 |
| Administrator (R.Admin)                 | Administrator (R.Admin)<br>CSP (Certificate Service Provider); Refinement of Administrator |
|                                         | Manufacturer                                                                               |
|                                         | Pre-personalizer (Refinement of Administrator)                                             |
|                                         | Personalizer (Refinement of Administrator)                                                 |
| <b>Threat agents</b>                    |                                                                                            |
| Attacker                                | Attacker                                                                                   |
| <b>Threats</b>                          |                                                                                            |
| T.SCD_Divulg                            | T.SCD_Divulg                                                                               |
| T.SCD_Derive                            | T.SCD_Derive                                                                               |
| T.Hack_Phys                             | T.Hack_Phys                                                                                |
| T.SVD_Forgery                           | T.SVD_Forgery                                                                              |
| T.SigF_Misuse                           | T.SigF_Misuse                                                                              |
| T.DTBS_Forgery                          | T.DTBS_Forgery                                                                             |
| T.Sig_Forgery                           | T.Sig_Forgery                                                                              |
|                                         | T.Unauthorized_Load                                                                        |
|                                         | T.Bad_Activation                                                                           |
|                                         | T.TOE_Identification_Forgery                                                               |
|                                         | T.Pre_Perso                                                                                |
|                                         | T.Perso                                                                                    |
| <b>Organisational Security Policies</b> |                                                                                            |
| P.CSP_QCert                             | P.CSP_QCert                                                                                |
| P.QSign                                 | P.QSign                                                                                    |
| P.Sigy_SSCD                             | P.Sigy_SSCD                                                                                |
| P.Sig_Non-Repud                         | P.Sig_Non-Repud                                                                            |
| <b>Assumptions</b>                      |                                                                                            |
| A.CGA                                   | A.CGA                                                                                      |
| A.SCA                                   | A.SCA                                                                                      |
| A.CSP                                   | A.CSP                                                                                      |
| <b>Security Objectives for the TOE</b>  |                                                                                            |
| OT.Lifecycle_Security                   | OT.Lifecycle_Security                                                                      |
| OT.SCD_Auth_Imp                         | OT.SCD_Auth_Imp                                                                            |
| OT.SCD_Secrecy                          | OT.SCD_Secrecy                                                                             |
| OT.Sig_Secure                           | OT.Sig_Secure                                                                              |
| OT.Sigy_SigF                            | OT.Sigy_SigF                                                                               |
| OT.DTBS_Integrity_TOE                   | OT.DTBS_Integrity_TOE                                                                      |

|                                                        |                         |
|--------------------------------------------------------|-------------------------|
| OT.EMSEC_Design                                        | OT.EMSEC_Design         |
| OT.Tamper_ID                                           | OT.Tamper_ID            |
| OT.Tamper_Resistance                                   | OT.Tamper_Resistance    |
| OT.TOE_TC_VAD_Imp                                      | OT.TOE_TC_VAD_Imp       |
| OT.TOE_TC_DTBS_Imp                                     | OT.TOE_TC_DTBS_Imp      |
|                                                        | OT.Secure_Load_ACode    |
|                                                        | OT.Secure_AC_Activation |
|                                                        | OT.TOE_Identification   |
|                                                        | OT.Pre_Perso            |
|                                                        | OT.Perso                |
| <b>Security Objectives for Operational Environment</b> |                         |
| OE.SCD/SVD_Auth_Gen                                    | OE.SCD/SVD_Auth_Gen     |
| OE.SCD_Secrecy                                         | OE.SCD_Secrecy          |
| OE.SCD_Unique                                          | OE.SCD_Unique           |
| OE.SCD_SVD_Corresp                                     | OE.SCD_SVD_Corresp      |
| OE.SVD_Auth                                            | OE.SVD_Auth             |
| OE.CGA_QCert                                           | OE.CGA_QCert            |
| OE.SSCD_Prov_Service                                   | OE.SSCD_Prov_Service    |
| OE.HID_TC_VAD_Exp                                      | OE.HID_TC_VAD_Exp       |
| OE.DTBS_Intend                                         | OE.DTBS_Intend          |
| OE.SCA_TC_DTBS_Exp                                     | OE.SCA_TC_DTBS_Exp      |
| OE.Signatory                                           | OE.Signatory            |

Table 5-2 - Conformance with SSCD-3 PP (SPD and Objectives)

### 5.2.1 Correspondences and additions of SFR

| SFRs from PP SSCD – 6        | SFRs from ST                 |
|------------------------------|------------------------------|
|                              | FCS_CKM.1/MP_Add_code        |
|                              | FCS_CKM.1/MP                 |
| FCS_CKM.4                    | FCS_CKM.4                    |
| FCS_COP.1                    | FCS_COP.1                    |
|                              | FCS_COP.1/MP_ENC_Add_code    |
|                              | FCS_COP.1/MP_MAC_Add_code    |
|                              | FCS_COP.1/MP_ENC_3DES        |
|                              | FCS_COP.1/MP_ENC_AES         |
|                              | FCS_COP.1/MP_MAC_3DES        |
|                              | FCS_COP.1/MP_MAC_AES         |
|                              | FCS_COP.1/MP_AUTH_3DES       |
|                              | FCS_COP.1/MP_AUTH_AES        |
|                              | FCS_COP.1/MP_SHA             |
| FDP_ACC.1/SCD_Import         | FDP_ACC.1/SCD_Import         |
|                              | FDP_ACC.2/MP                 |
| FDP_ACF.1/SCD_Import         | FDP_ACF.1/SCD_Import         |
|                              | FDP_ACF.1/MP                 |
| FDP_ACC.1/Signature_Creation | FDP_ACC.1/Signature_Creation |
| FDP_ACF.1/Signature creation | FDP_ACF.1/Signature creation |
| FDP_ITC.1/SCD                | FDP_ITC.1/SCD                |
| FDP_UTC.1/SCD                | FDP_UTC.1/SCD                |
| FDP_RIP.1                    | FDP_RIP.1                    |
| FDP_SDI.2/Persistent         | FDP_SDI.2/Persistent         |
| FDP_SDI.2/DTBS               | FDP_SDI.2/DTBS               |
|                              | FDP_UCT.1/MP                 |
|                              | FDP_UIT.1/MP                 |
|                              | FDP_UIT.1/MP_Add_code        |
| FIA_UID.1                    | FIA_UID.1                    |
|                              | FIA_UID.1/MP                 |
| FIA_UAU.1                    | FIA_UAU.1                    |
|                              | FIA_UAU.1/MP                 |
|                              | FIA_UAU.4/MP_3DES            |
|                              | FIA_UAU.4/MP_AES             |
|                              | FIA_UAU.5/MP_3DES            |
|                              | FIA_UAU.5/MP_AES             |
| FIA_AFL.1                    | FIA_AFL.1                    |
|                              | FIA_AFL.1/MP                 |

| SFRs from PP SSCD – 6 | SFRs from ST                   |
|-----------------------|--------------------------------|
| FMT_SMR.1             | FMT_SMR.1                      |
|                       | FMT_SMR.1/MP_Add_Code          |
|                       | FMT_SMR.1/MP                   |
| FMT_SMF.1             | FMT_SMF.1                      |
|                       | FMT_SMF.1/MP                   |
| FMT_MOF.1             | FMT_MOF.1                      |
| FMT_MSA.1/Admin       | FMT_MSA.1/Admin                |
| FMT_MSA.1/Signatory   | FMT_MSA.1/Signatory            |
| FMT_MSA.2             | FMT_MSA.2                      |
| FMT_MSA.3             | FMT_MSA.3                      |
| FMT_MSA.4             | FMT_MSA.4                      |
| FMT_MTD.1/Admin       | FMT_MTD.1/Admin                |
| FMT_MTD.1/Signatory   | FMT_MTD.1/Signatory            |
|                       | FMT_MTD.1/MP_Add_code          |
|                       | FMT_MTD.1/MP_KEY_READ_Add_code |
|                       | FMT_MTD.1/MP                   |
|                       | FMT_MTD.1/MP_INI_ENA           |
|                       | FMT_MTD.1/MP_INI_DIS           |
|                       | FMT_MTD.1/MP_KEY_READ          |
|                       | FMT_MTD.1/MP_KEY_WRITE         |
| FPT_EMS.1             | FPT_EMS.1                      |
|                       | FPT_EMS.1/MP_Add_code          |
|                       | FPT_EMS.1/MP                   |
| FPT_FLS.1             | FPT_FLS.1                      |
| FPT_PHP.1             | FPT_PHP.1                      |
| FPT_PHP.3             | FPT_PHP.3                      |
| FPT_TST.1             | FPT_TST.1                      |
| FTP_ITC.1/SCD         | FTP_ITC.1/SCD                  |
| FDP_UIT.1/DTBS        | FDP_UIT.1/DTBS                 |
| FTP_ITC.1/VAD         | FTP_ITC.1/VAD                  |
| FTP_ITC.1/DTBS        | FTP_ITC.1/DTBS                 |
|                       | FTP_ITC.1/MP_Add_code          |
|                       | FTP_ITC.1/MP                   |
|                       | FDP_ITC.1/MP                   |
|                       | FAU_SAS.1/MP                   |
|                       | FAU_STG.2/MP_Add_Code          |

Table 5-3 - Conformance with SSCD-6 PP (SFR)

## 6 SECURITY PROBLEM DEFINITION

### 6.1 Assets, objects, users and subjects

The assets, objects, users and subjects appearing in the rest of the Security Target are being introduced in this section.

#### 6.1.1 Assets and objects

##### 6.1.1.1 From PP SSCD-6

1. SCD: private key used to perform an electronic signature operation. The confidentiality, integrity and signatory's sole control over the use of the SCD must be maintained.  
SCD key is an asset of "operational use" phase.
2. SVD: public key linked to the SCD and used to perform electronic signature verification. The integrity of the SVD when it is exported must be maintained.  
SVD key is an asset of "operational use" phase.
3. DTBS and DTBS/R: set of data, or its representation, which the signatory intends to sign. Their integrity and the unforgeability of the link to the signatory provided by the electronic signature must be maintained.  
DTBS and DTBS/R are assets of the "Operational Use" phase.

##### 6.1.1.2 Others

4. TOE ID: Data uniquely identifying the TOE.  
TOE ID is an asset of the "pre-personalization" and "personalization" phases.
5. CPLC data: Card Personalization Life Cycle data  
CPLC is an asset of the "pre-personalization" and "personalization" phases.
6. RAD: Reference Authentication Data  
RAD is an asset of the "personalization" and "operational use" phases.
7. Pre-personalization / Personalization keys (including LSK, MSK, DEC, ENC, MAC, keys used for Secure Messaging)  
These keys are used for encrypting and charging of additional code and keys during the Pre-personalization and Personalization phases. They count as sensitive data.

## 6.1.2 Users and subjects acting for users

### 6.1.2.1 From PP SSCD - 6

1. User: End user of the TOE who can be identified as administrator or signatory. The subject S.User may act as S.Admin in the role R.Admin or as S.Sigy in the role R.Sigy.
2. Administrator: User who is in charge to perform the TOE initialisation, TOE (pre-) personalization or other TOE administrative functions. The subject S.Admin is acting in the role R.Admin for this user after successful authentication as administrator. The CSP (Certificate Service Provider) also counts as Administrator.
3. Signatory: User who holds the TOE and uses it on their own behalf or on behalf of the natural or legal person or entity they represent. The subject S.Sigy is acting in the role R.Sigy for this user after successful authentication as signatory.

### 6.1.2.2 Others

4. Manufacturer: The person that produces the TOE. He will act in the role Manufacturer.
5. Pre-personalizer: This is a refinement of the Administrator and describes the person that is specifically in charge of Pre-personalization. He is able to import the signature key.
6. Personalizer: This is a refinement of the Administrator and describes the person that is specifically in charge of Personalization. He is able to import the signature key.

## 6.2 Threats

The threats for the TOE are introduced in this section, beginning with the definition of the threat agents.

### 6.2.1 Threat agents

#### 6.2.1.1 From PP SSCD - 6

1. Attacker in operational use phase: Human or process acting on their behalf located outside the TOE. The main goal of the attacker is to access the SCD or to falsify the electronic signature. The attacker has got a high attack potential and knows no secret.

#### 6.2.1.2 Others

2. Attacker in pre-personalization or personalisation phases: human or process acting on their behalf located outside the TOE. The goal of the attacker is to read or modify the TOE pre-personalisation and personalization data that he does not have the right to read or modify (sensitive data), or to forge the additional code. The attacker has got a high attack potential.

## 6.2.2 Threats from PP SSCD - 6

### 6.2.2.1 *T.SCD\_Divulg* *Storing, copying and releasing of the signature creation data*

An attacker stores or copies the SCD outside the TOE. An attacker can obtain the SCD during generation, storage and use for signature creation in the TOE.

### 6.2.2.2 *T.SCD\_Derive* *Derive the signature creation data*

An attacker derives the SCD from publicly known data, such as SVD corresponding to the SCD or signatures created by means of the SCD or any other data exported outside the TOE, which is a threat against the secrecy of the SCD.

### 6.2.2.3 *T.Hack\_Phys* *Physical attacks through the TOE interfaces*

An attacker interacts physically with the TOE to exploit vulnerabilities, resulting in arbitrary security compromises. This threat is directed against SCD, SVD and DTBS.

### 6.2.2.4 *T.SVD\_Forgery* *Forgery of the signature verification data*

An attacker forges the SVD presented by the CSP to the CGA. This results in loss of SVD integrity in the certificate of the signatory.

### 6.2.2.5 *T.SigF\_Misuse* *Misuse of the signature creation function of the TOE*

An attacker misuses the signature creation function of the TOE to create SDO for data the signatory has not decided to sign. The TOE is subject to deliberate attacks by experts possessing a high attack potential with advanced knowledge of security principles and concepts employed by the TOE.

### 6.2.2.6 *T.DTBS\_Forgery* *Forgery of the DTBS/R*

An attacker modifies the DTBS/R sent by the SCA. Thus the DTBS/R used by the TOE for signing does not match the DTBS the signatory intended to sign.

### 6.2.2.7 *T.Sig\_Forgery* *Forgery of the electronic signature*

An attacker forges a signed data object, maybe using an electronic signature, which has been created by the TOE, and the violation of the integrity of the signed data object is not detectable by the signatory or by third parties. The signature created by the TOE is subject to deliberate attacks by experts possessing a high attack potential with advanced knowledge of security principles and concepts employed by the TOE.

## 6.2.3 Threats for Loading of Additional Code

### 6.2.3.1 *T.Unauthorized\_Load*

*Adverse action:* An attacker tries to load an additional code that is not intended to be assembled with the initial TOE, i.e. the evidence of authenticity or integrity is not correct.



*Threat agent:* having high attack potential, knowing the MSK, LSK and derivation data, being in possession of a legitimate eSign card

*Asset:* RAD

#### 6.2.3.2 T.Bad\_Activation

*Adverse action:* An attacker tries to perturbate the additional code activation such that the final TOE is different than the expected one (initial TOE or perturbed TOE).

*Threat agent:* having high attack potential, knowing the MSK, LSK and derivation data, being in possession of a legitimate eSign card, being in possession of an additional code that is authorized to be loaded

*Asset:* RAD

#### 6.2.3.3 T.TOE\_Identification\_Forgery

*Adverse action:* An attacker tries to perturb the TOE identification and in particular the additional code identification.

*Threat agent:* having high attack potential, being in possession of a legitimate eSign card.

*Asset:* TOE ID

**Application Note:** This threat is not applicable in phase 7, as the TOE identification is not possible in phase 7.

## 6.2.4 Threats for pre-personalization and personalization

### 6.2.4.1 T.Pre\_Perso

*Adverse action:* An attacker tries to read or modify TOE assets available in pre-personalization phase that he does not have the right to read or modify (sensitive data).

*Threat agent:* having high attack potential, being in possession of a legitimate eSign card.

*Assets:* CPLC data, TOE-ID.

### 6.2.4.2 T.Perso

*Adverse action:* An attacker tries to read or modify TOE assets available in personalization phase that he does not have the right to read or modify (sensitive data).

*Threat agent:* having high attack potential, being in possession of a legitimate eSign card.

*Assets:* CPLC data, TOE-ID, RAD.

## 6.3 Organizational security policies

### 6.3.1 Organizational Security Policies from the PP SSCD – 6

#### 6.3.1.1 P.CSP\_QCert

#### *Qualified certificate*

The CSP uses a trustworthy CGA to generate a qualified certificate or non-qualified certificate (cf. the directive, article 2, clause 9, and Annex I) for the SVD. The certificates contain at least the name of the signatory and the SVD matching the SCD implemented in the TOE under sole control of the signatory. The CSP ensures that the use of the TOE as SSCD is evident with signatures through the certificate or other publicly available information.

#### 6.3.1.2 P.QSign

#### *Qualified electronic signatures*

The signatory uses a signature creation system to sign data with an advanced electronic signature (cf. the directive, article 1, clause 2), which is a qualified electronic signature if it is based on a valid qualified certificate (according to the directive Annex I)<sup>1</sup>. The DTBS are presented to the signatory and sent by the SCA as DTBS/R to the SSCD. The SSCD creates the electronic signature created with a SCD implemented in the SSCD that the signatory maintain under their sole control and is linked to the DTBS/R in such a manner that any subsequent change of the data is detectable.

#### 6.3.1.3 P.Sigy\_SSCD

#### *TOE as secure signature creation device*

The TOE meets the requirements for an SSCD laid down in Annex III of the directive [1]. This implies the SCD is used for digital signature creation under sole control of the signatory and the SCD can practically occur only once.

#### 6.3.1.4 P.Sig\_Non-Repud

#### *Non-repudiation of signatures*

The life cycle of the SSCD, the SCD and the SVD shall be implemented in a way that the signatory is not able to deny having signed data if the signature is successfully verified with the SVD contained in their unrevoked certificate.

---

<sup>1</sup> It is a non-qualified advanced electronic signature if it is based on a non-qualified certificate for the SVD.

## 6.4 Assumptions

### 6.4.1 Assumptions from the PP SSCD – 6

#### 6.4.1.1 A.CGA

#### *Trustworthy certificate generation application*

The CGA protects the authenticity of the signatory's name or pseudonym and the SVD in the (qualified) certificate by an advanced electronic signature of the CSP.

#### 6.4.1.2 A.SCA

#### *Trustworthy signature creation application*

The signatory uses only a trustworthy SCA. The SCA generates and sends the DTBS/R of the data the signatory wishes to sign in a form appropriate for signing by the TOE.

#### 6.4.1.3 A.CSP

#### *Secure SCD/SVD management by CSP*

The CSP uses only a trustworthy SCD/SVD generation device and ensures that this device can be used by authorised user only. The CSP ensures that the SCD generated practically occurs only once, that generated SCD and SVD actually correspond to each other and that SCD cannot be derived from the SVD. The CSP ensures the confidentiality of the SCD during generation and export to the TOE, does not use the SCD for creation of any signature and irreversibly deletes the SCD in the operational environment after export to the TOE.

## 7 SECURITY OBJECTIVES

### 7.1 Security Objectives for the TOE

#### 7.1.1 Security Objectives from PP SSCD - 6

##### 7.1.1.1 *Relation to core PP SSCD KI*

This PP SSCD KI TCSCA includes all security objectives for the TOE as defined in the core PP SSCD KI [\[R7\]](#): OT.Lifecycle\_Security, OT.SCD\_Auth\_Imp, OT.SCD\_Secrecy, OT.Sig\_Secure, OT.Sigy\_SigF, OT.DTBS\_Integrity\_TOE, OT.EMSEC\_Design, OT.Tamper\_ID and OT.Tamper\_Resistance. It additionally defines the security objectives OT.TOE\_TC\_VAD\_Imp and OT.TOE\_TC\_DTBS\_Imp.

##### 7.1.1.2 *OT.Lifecycle\_Security*

##### **Lifecycle security**

The TOE shall detect flaws during the initialisation, personalisation and operational usage. The TOE shall securely destroy the SCD on demand of the signatory.

The TOE only contains one set of SCD at a time.

##### 7.1.1.3 *OT.SCD\_Auth\_Imp*

##### **Authorized SCD import**

The TOE shall provide security features to ensure that authorized users only may invoke the import of the SCD.

##### 7.1.1.4 *OT.SCD\_Secrecy*

##### **Secrecy of the signature creation data**

The secrecy of the SCD (used for signature creation) shall be reasonably assured against attacks with a high attack potential.

##### 7.1.1.5 *OT.Sig\_Secure*

##### **Cryptographic security of the electronic signature**

The TOE shall create digital signatures that cannot be forged without knowledge of the SCD through robust encryption techniques. The SCD shall not be reconstructable using the digital signatures or any other data exportable from the TOE. The digital signatures shall be resistant against these attacks, even when executed with a high attack potential.

##### 7.1.1.6 *OT.Sigy\_SigF* **only**

##### **Signature creation function for the legitimate signatory**

The TOE shall provide the digital signature creation function for the legitimate signatory only and protects the SCD against the use of others. The TOE shall resist attacks with high attack potential.

**7.1.1.7 OT.DTBS\_Integrity\_TOE**

**DTBS/R integrity inside the TOE**

The TOE must not alter the DTBS/R. As by definition of the DTBS/R this may consist of the DTBS themselves, this objective does not conflict with a signature creation process where the TOE hashes the provided DTBS (in part or entirely) for signature creation.

**7.1.1.8 OT.EMSEC\_Design**

**Provide physical emanations security**

The TOE shall be designed and built in such a way as to control the production of intelligible emanations within specified limits.

**7.1.1.9 OT.Tamper\_ID**

**Tamper detection**

The TOE shall provide system features that detect physical tampering of its components, and uses those features to limit security breaches.

**7.1.1.10 OT.Tamper\_Resistance**

**Tamper resistance**

The TOE shall prevent or resist physical tampering with specified system devices and components.

**OT.TOE\_TC\_DTBS\_Imp**

**Trusted channel of TOE for DTBS import**

The TOE shall provide a trusted channel to the SCA to detect alteration of the DTBS/R received from the SCA. The TOE must not generate electronic signatures with the SCD for altered DTBS.

**Application note:** This security objective for the TOE is partly covering OE.DTBS\_Protect from the core ST. While OE.DTBS\_Protect in the core ST requires only the operational environment to protect DTBS, this ST requires the SCA and the TOE to implement a trusted channel for the protection of the DTBS: the SCA exports the DTBS and establishes one end of the trusted channel according to OE.SCA\_TC\_DTBS\_Exp, the TOE imports DTBS at the other end of the trusted channel according to OT.TOE\_TC\_DTBS\_Imp. Therefore this ST re-assigns partly the DTBS protection from the operational environment as described by OE.DTBS\_Protect to the TOE as described by OT.TOE\_TC\_DTBS\_Imp and leaves only the necessary functionality by the SCA.

**OT.TOE\_TC\_VAD\_Imp**

**Trusted channel of TOE for VAD export**

The TOE shall provide a trusted channel for the protection of the confidentiality and integrity of the VAD received from the HID as needed by the authentication method employed.

**Application note:** This security objective for the TOE is partly covering OE.HID\_VAD from the core ST. While OE.HID\_VAD in the core ST requires only the operational environment to protect VAD, this ST requires the HID and the TOE to implement a trusted channel for the protection of the VAD: the HID exports the VAD and establishes one end of the trusted channel according to OE.HID\_TC\_VAD\_Exp, the TOE imports VAD at the other end of the trusted channel according to OT.TOE\_TC\_VAD\_Imp. Therefore this ST re-assigns partly

the VAD protection from the operational environment as described by OE.HID\_VAD to the TOE as described by OT.TOE\_TC\_VAD\_Imp and leaves only the necessary functionality by the HID.

## 7.1.2 Security Objectives for the Loading of Additional Code

### 7.1.2.1 OT.Secure\_Load\_ACode

The Loader of the Initial TOE shall check an evidence of authenticity and integrity of the loaded Additional Code. The Loader enforces that only the allowed version of the Additional Code can be loaded on the Initial TOE. The Loader shall forbid the loading of an Additional Code not intended to be assembled with the Initial TOE.

During the Load Phase of an Additional Code, the TOE shall remain secure.

### 7.1.2.2 OT.Secure\_AC\_Activation

Activation of the Additional Code and update of the Identification Data shall be performed at the same time in an Atomic way. All the operations needed for the code to be able to operate as in the Final TOE shall be completed before activation. If the Atomic Activation is successful, then the resulting product is the Final TOE, otherwise (in case of interruption or incident which prevents the forming of the Final TOE), the Initial TOE shall remain in its initial state or fail secure.

### 7.1.2.3 OT.TOE\_Identification

The Identification Data identifies the Initial TOE and Additional Code. The TOE provides means to store Identification Data in its non-volatile memory and guarantees the integrity of these data. After Atomic Activation of the Additional Code, the Identification Data of the Final TOE allows identifications of Initial TOE and Additional Code. The user must be able to uniquely identify Initial TOE and Additional Code(s) which are embedded in the Final TOE. TOE must support the terminal to verify the authenticity.

## 7.1.3 Security Objectives for pre-personalization and personalization

### 7.1.3.1 OT.Pre\_Perso

The TOE must protect the stored data from unauthorized disclosure or modification. Sensitive data cannot be read nor modified by anyone else than the pre-personalizer. The TOE shall protect sensitive data against unauthorized disclosure or modification by logical or physical means. To perform any operation on sensitive data, the pre-personalizer shall be authenticated. He may use secure messaging to exchange data with the TOE. The loading of the keys is always executed encrypted with the DEC key, and optionally with additional SM.

The code is always loaded during the pre-personalization phase encrypted with the LSK key.

### 7.1.3.2 OT.Perso

The TOE must protect the stored data from unauthorized disclosure or modification. Sensitive data cannot be read or modified by anyone else than the personalizer. The TOE shall protect sensitive data against unauthorized disclosure or modification by logical or physical means. To perform any operation on sensitive data, the personalizer shall be authenticated. He may use secure messaging to exchange data with the TOE. The loading of the keys is always executed encrypted with the DEC key, and optionally with additional SM.

## 7.2 Security objectives for the operational environment

### 7.2.1 Security objectives from PP SSCD-6

#### 7.2.1.1 Relation to core ST SSCD KI

This ST SSCD KI TCSCA includes the security objectives for the operational environment as defined in the core ST SSCD KI [R7]: OE.SCD/SVD\_Auth\_Gen, OE.SCD\_Secrecy, OE.SCD\_Unique, OE.SCD\_SVD\_Corresp, OE.SVD\_Auth, OE.CGA\_Qcert, OE.SSCD\_Prov\_Service, OE.DTBS\_Intend and OE.Signatory.

This PP substitutes OE.HI\_VAD from the core PP by OE.HID\_TC\_VAD\_Exp and OE.DTBS\_Protect from the core ST by OE.SCA\_TC\_DTBS\_Exp.

#### 7.2.1.2 OE.SCD/SVD\_Auth\_Gen *Authorized SCD/SVD generation*

The CSP shall provide security features to ensure that authorized users only may invoke the generation of the SCD and the SVD.

#### 7.2.1.3 OE.SCD\_Secrecy *SCD secrecy*

The CSP shall protect the confidentiality of the SCD during generation and export to the TOE. The CSP shall not use the SCD for creation of any signature and shall irreversibly delete the SCD in the operational environment after export to the TOE.

#### 7.2.1.4 OE.SCD\_Unique *Uniqueness of the signature creation data*

The CSP shall ensure the cryptographic quality of the SCD/SVD pair, which is generated in the environment, for the qualified or advanced electronic signature. The SCD used for signature creation shall practically occur only once, i.e. the probability of equal SCDs shall be negligible, and the SCD shall not be reconstructable from the SVD.

#### 7.2.1.5 OE.SCD\_SVD\_Corresp *Correspondence between SCD and SVD*

The CSP shall ensure the correspondence between the SVD and the SCD generated by the CSP. This includes the correspondence between the SVD send to the CGA and the SCD exported to the TOE of the signatory identified in the SVD certificate.



#### **7.2.1.6 OE.SVD\_Auth**

#### ***Authenticity of the SVD***

The operational environment shall ensure the authenticity of the SVD sent to the CGA of the CSP. The CGA verifies the correspondence between the SCD in the SSCD of the signatory and the SVD in the qualified certificate.

#### **7.2.1.7 OE.CGA\_QCert**

#### ***Generation of qualified certificates***

The CGA shall generate a qualified certificate that includes (amongst others)

- (a) the name of the signatory controlling the TOE,
- (b) the SVD matching the SCD stored in the TOE and being under sole control of the signatory,
- (c) the advanced signature of the CSP.

The CGA shall confirm with the generated qualified certificate that the SCD corresponding to the SVD is stored in a SSCD.

#### **7.2.1.8 OE.SSCD\_Prov\_Service**

#### ***Authentic SSCD provided by SSCD-provisioning service***

The SSCD-provisioning service shall initialize and personalize for the signatory an authentic copy of the TOE and deliver this copy as SSCD to the signatory.

#### **OE.HID\_TC\_VAD\_Exp**

#### ***Trusted channel of HID for VAD export***

The HID provides the human interface for user authentication. The HID will ensure confidentiality and integrity of the VAD as needed by the authentication method employed including export to the TOE by means of a trusted channel.

**Application note:** This security objective for the TOE is partly covering OE.HID\_VAD from the core ST. While OE.HID\_VAD in the core ST requires only the operational environment to protect VAD, this ST requires the HID and the TOE to implement a trusted channel for the protection of the VAD: the HID exports the VAD and establishes one end of the trusted channel according to OE.HID\_TC\_VAD\_Exp, the TOE imports VAD at the other end of the trusted channel according to OT.TOE\_TC\_VAD\_Imp. Therefore this ST re-assigns partly the VAD protection from the operational environment as described by OE.HID\_VAD to the TOE as described by OT.TOE\_TC\_VAD\_Imp and leaves only the necessary functionality by the HID.

#### **7.2.1.9 OE.DTBS\_Intend**

#### ***SCA sends data intended to be signed***

The signatory shall use a trustworthy SCA that

- generates the DTBS/R of the data that has been presented as DTBS and which the signatory intends to sign in a form which is appropriate for signing by the TOE,
- sends the DTBS/R to the TOE and enables verification of the integrity of the DTBS/R by the TOE,
- attaches the signature produced by the TOE to the data or provides it separately.

#### **OE.SCA\_TC\_DTBS\_Exp**

#### ***Trusted channel of SCA for DTBS export***

The SCA provides a trusted channel to the TOE for the protection of the integrity of the DTBS to ensure that the DTBS/R cannot be altered undetected in transit between the SCA and the TOE.



**Application note:** This security objective for the TOE is partly covering OE.DTBS\_Protect from the core ST. While OE.DTBS\_Protect in the core ST requires only the operational environment to protect DTBS, this ST requires the SCA and the TOE to implement a trusted channel for the protection of the DTBS: the SCA exports the DTBS and establishes one end of the trusted channel according to OE.SCA\_TC\_DTBS\_Exp, the TOE imports DTBS at the other end of the trusted channel according to OT.TOE\_TC\_DTBS\_Imp. Therefore this ST re-assigns partly the DTBS protection from the operational environment as described by OE.DTBS\_Protect to the TOE as described by OT.TOE\_TC\_DTBS\_Imp and leaves only the necessary functionality by the SCA.

#### ***7.2.1.10 OE.Signatory***

#### ***Security obligation of the signatory***

The signatory shall check that the SCD stored in the SSCD received from SSCD-provisioning service is in non-operational state. The signatory shall keep their VAD confidential.

## 8 EXTENDED COMPONENTS DEFINITION


### 8.1 Definition of the Family FPT\_EMS

The additional family FPT\_EMS (TOE Emanation) of the Class FPT (Protection of the TSF) is defined here to describe the IT security functional requirements of the TOE. The TOE shall prevent attacks against the SCD and other secret data where the attack is based on external observable physical phenomena of the TOE. Examples of such attacks are evaluation of TOE's electromagnetic radiation, simple power analysis (SPA), differential power analysis (DPA), timing attacks, radio emanation etc. This family describes the functional requirements for the limitation of intelligible emanations. The family FPT\_EMS belongs to the Class FPT because it is the class for TSF protection. Other families within the Class FPT do not cover the TOE emanation. The definition of the family FPT\_EMS is taken from the *Protection Profile Secure Signature Creation Device* [5].

#### FPT\_EMS TOE Emanation

Family behavior: This family defines requirements to mitigate intelligible emanations.

Component leveling:



FPT\_EMS.1 TOE Emanation has two constituents:

- FPT\_EMS.1.1 Limit of Emissions requires to not emitting intelligible emissions enabling access to TSF data or user data.
- FPT\_EMS.1.2 Interface Emanation requires to not emitting interface emanation enabling access to TSF data or user data.

Management: FPT\_EMS.1

There are no management activities foreseen.

Audit: FPT\_EMS.1

There are no actions identified that shall be auditable if **FAU\_GEN** (*Security audit data generation*) is included in a PP or ST using FPT\_EMS.1.

#### FPT\_EMS.1 TOE Emanation

Hierarchical to: No other components.

Dependencies: No dependencies.

FPT\_EMS.1.1

The TOE shall not emit [*assignment: types of emissions*] in excess of [*assignment: specified limits*] enabling access to [*assignment: list of types of TSF data*] and [*assignment: list of types of user data*].

FPT\_EMS.1.2

The TSF shall ensure [*assignment: type of users*] are unable to use the following interface [*assignment: type of connection*] to gain access to [*assignment: list of types of TSF data*] and [*assignment: list of types of user data*].

## 8.2 Definition of the Family FAU\_SAS


To define the security functional requirements of the TOE an additional family (FAU\_SAS) of the Class FAU (Security Audit) is defined here. This family describes the functional requirements for the storage of audit data. It has a more general approach than FAU\_GEN, because it does not necessarily require the data to be generated by the TOE itself and because it does not give specific details of the content of the audit records.

The family “Audit data storage (FAU\_SAS)” is specified as follows.

### FAU\_SAS Audit data storage

Family behavior: This family defines functional requirements for the storage of the audit data

Component leveling:



FAU\_SAS.1 Requires the TOE to provide the possibility to store audit data

Management: FAU\_SAS.1 There are no management activities foreseen

Audit: FAU\_SAS.1 There are no actions defined to be auditable

### FAU\_SAS.1 Audit storage

Hierarchical to: No other components

Dependencies: No Dependencies

FAU\_SAS.1.1

The TSF shall provide [assignment: *list of subjects*] with the capability to store [assignment: *list of audit information*] in the [assignment: *type of persistent memory*]

## 9 SECURITY REQUIREMENTS

### 9.1 Security functional requirements from PP SSCD – 6

Underlined parts correspond to instantiations, where the ones referenced by a footnote are the instantiations of this Security Target and the ones without instantiations of the Protection Profile. Bold parts correspond to editorial refinements.

#### 9.1.1 Cryptographic support (FCS)

##### 9.1.1.1 **FCS\_CKM.4** Cryptographic key destruction

Hierarchical to: No other components.

Dependencies: [FDP\_ITC.1 Import of user data without security attributes, or  
FDP\_ITC.2 Import of user data with security attributes, or  
FCS\_CKM.1 Cryptographic key generation]

FCS\_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method zeroisation<sup>2</sup> that meets the following: none<sup>3</sup>.

##### 9.1.1.2 **FCS\_COP.1** Cryptographic operation

Hierarchical to: No other components.

Dependencies: [FDP\_ITC.1 Import of user data without security attributes, or  
FDP\_ITC.2 Import of user data with security attributes, or  
FCS\_CKM.1 Cryptographic key generation]  
FCS\_CKM.4 Cryptographic key destruction

FCS\_COP.1.1 The TSF shall perform digital signature creation<sup>4</sup> in accordance with a specified cryptographic algorithm

- Hash: SHA1, SHA224, SHA256, SHA384, SHA512
- Signature based on RSA and elliptic curve signature scheme:

---

<sup>2</sup> [assignment: cryptographic key destruction method]

<sup>3</sup> [assignment: list of standards].

<sup>4</sup> [assignment : list of cryptographic operations]

- RSA PKCS#v1.5
- RSA PSS
- Without the following combinations:
  - ESIGN RSA PKCS#v1.5 1024 SHA384
  - ESIGN RSA PKCS#v1.5 1024 SHA512
  - ESIGN RSA PKCS#v1.5 1280 SHA512
  - ESIGN RSA PKCS#v1.5 1536 SHA512
- Signature based on Elliptic curves signature schemes:
  - ECDSA plain
  - ECDSA BER-TLV

and cryptographic key sizes RSA 1024 to 4096 bits in steps of 256 bits and EC 192 up to 521 bits that meet the following:

- RSA Digital Signature Schemes with Appendix (RSA labs)
  - PKCS version 1.5 RSASSA-PKCSv1\_5
  - PKCS version 2.1 Probabilistic Signature Scheme RSASSA-PSS
- ECDSA – Elliptic Curve Digital Signature Scheme (TR 3111)
  - Plain format
  - X9.62 format<sup>5</sup>

### 9.1.2 User data protection (FDP)

The security attributes and related status for the subjects and objects are:

| Subject or object the security attribute is associated with | Security attribute type | Value of the security attribute |
|-------------------------------------------------------------|-------------------------|---------------------------------|
| S.User                                                      | Role                    | R.Admin<br>R.Sigy               |
|                                                             | SCD/SVD Management      | Authorized<br>Not authorized    |
| SCD                                                         | SCD Operational         | No<br>Yes                       |

#### 9.1.2.1 FDP\_ACC.1/SCD\_Import

#### Subset access control

Hierarchical to: No other components.

Dependencies: FDP\_ACF.1 Security attribute based access control

<sup>5</sup> [assignment: list of standards]

FDP\_ACC.1.1/SCD\_Import The TSF shall enforce the SCD Import SFP<sup>6</sup> on

(1) subjects: S.User,

(2) objects: SCD,

(3) operations: import of SCD<sup>7</sup>.

### 9.1.2.2 FDP\_ACF.1/SCD\_Import

### Security attribute based access control

Hierarchical to: No other components.

Dependencies: FDP\_ACC.1 Subset access control

FMT\_MSA.3 Static attribute initialization

FDP\_ACF.1.1/SCD\_Import The TSF shall enforce the SCD Import SFP<sup>8</sup> to objects based on the following: the user S.User is associated with the security attribute “SCD/SVD Management”<sup>9</sup>.

FDP\_ACF.1.2/ SCD\_Import The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:  
  
S.User with the security attribute “SCD/SVD Management” set to “authorised” is allowed to import SCD<sup>10</sup>.

FDP\_ACF.1.3/ SCD\_Import The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: none<sup>11</sup>.

FDP\_ACF.1.4/ SCD\_Import The TSF shall explicitly deny access of subjects to objects based on the following additional rules:

---

<sup>6</sup> [assignment : access control SFP]

<sup>7</sup> [assignment : list of subjects, objects and operations among subjects and objects covered by the SFP]

<sup>8</sup> [assignment : access control SFP]

<sup>9</sup> [assignment: list of subjects and objects controlled under the indicated SFP, and for each, the SFP- relevant security attributes, or named groups of SFP-relevant security attributes]

<sup>10</sup> [assignment: rules governing access among controlled subjects and controlled objects using controlled operations on controlled objects]

<sup>11</sup> [assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

S.User with the security attribute “SCD/SVD management” set to “not authorised” is not allowed to import SCD<sup>12</sup>.

**9.1.2.3 FDP\_ACC.1/Signature\_Creation Subset access control**

Hierarchical to: No other components

Dependencies: FDP\_ACF.1 Security attribute based access control

FDP\_ACC.1.1/Signature\_Creation The TSF shall enforce the Signature Creation SFP on

- (1) subjects: S.User,
- (2) objects: DTBS/R, SCD,
- (3) operations: signature creation.

**9.1.2.4 FDP\_ACF.1/Signature creation Security attribute based access control**

Hierarchical to: No other components.

Dependencies: FDP\_ACC.1 Subset access control  
FMT\_MSA.3 Static attribute initialisation

FDP\_ACF.1.1/ Signature\_Creation The TSF shall enforce the Signature Creation SFP to objects based on the following:

- (1) the user S.User is associated with the security attribute “Role” and
- (2) the SCD with the security attribute “SCD Operational”.

FDP\_ACF.1.2/ Signature\_Creation The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:

R.Sigy is allowed to create electronic signatures for DTBS/R with SCD which security attribute “SCD operational” is set to “yes”.

---

<sup>12</sup> [assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]



FDP\_ACF.1.3/ Signature\_Creation

The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: none.

FDP\_ACF.1.4/ Signature\_Creation

The TSF shall explicitly deny access of subjects to objects based on the following additional rules:

S.User is not allowed to create electronic signatures for DTBS/R with SCD which security attribute "SCD operational" is set to "no".

#### 9.1.2.5 FDP\_ITC.1/SCD

#### Import of user data without security attributes

Hierarchical to:

No other components

Dependencies:

[FDP\_ACC.1 Subset access control, or

FDP\_IFC.1 Subset information flow control]

FMT\_MSA.3 Static attribute initialisation

FDP\_ITC.1.1/SCD

The TSF shall enforce the SCD Import SFP when importing user data, controlled under the SFP, from outside of the TOE.

FDP\_ITC.1.2/SCD

The TSF shall ignore any security attributes associated with the ~~user data~~ **SCD** when imported from outside the TOE.

FDP\_ITC.1.3/SCD

The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TOE: The SCD shall be sent by an authorized trusted IT environment.

#### 9.1.2.6 FDP\_UCT.1/SCD

#### Basic data exchange confidentiality

Hierarchical to:

No other components

Dependencies:

[FTP\_ITC.1 Inter-TSF trusted channel, or

FTP\_TRP.1 Trusted path]

[FDP\_ACC.1 Subset access control, or

FDP\_IFC.1 Subset information flow control]

FDP\_UCT.1.1/SCD

The TSF shall enforce the SCD Import SFP to receive user data **SCD** in a manner protected from unauthorised disclosure.

**Application note:** The component FDP\_UCT.1/SCD requires the TSF to ensure the confidentiality of the SCD during import. The refinement substituting “user data” by “SCD” highlights that confidentiality of other imported user data like DTBS is not required.

#### 9.1.2.7 FDP\_RIP.1

#### Subset residual information protection

Hierarchical to: No other components

Dependencies: No dependencies

FDP\_RIP.1.1

The TSF shall ensure that any previous information content of a resource is made unavailable upon the de-allocation of the resource from the following objects: SCD.

#### 9.1.2.8 FDP\_SDI.2/Persistent

#### Stored data integrity monitoring and action

Hierarchical to: FDP\_SDI.1 Stored data integrity monitoring.

Dependencies: No dependencies.

FDP\_SDI.2.1/ Persistent

The TSF shall monitor user data stored in containers controlled by the TSF for integrity error on all objects, based on the following attributes: integrity checked stored data.

FDP\_SDI.2.2/ Persistent

Upon detection of a data integrity error, the TSF shall

- (1) prohibit the use of the altered data
- (2) inform the S.Sigy about integrity error.

**Application note:** The following data persistently stored by the TOE has the user data attribute "integrity checked persistent stored data":

1. SCD
2. SVD

#### 9.1.2.9 FDP\_SDI.2/DTBS

#### Stored data integrity monitoring and action

Hierarchical to: FDP\_SDI.1 Stored data integrity monitoring.

Dependencies: No dependencies.

FDP\_SDI.2.1/DTBS

The TSF shall monitor user data stored in containers controlled by the TSF for integrity error on all objects, based on the following attributes: integrity checked stored DTBS.

FDP\_SDI.2.2/DTBS

Upon detection of a data integrity error, the TSF shall

- (1) prohibit the use of the altered data
- (2) inform the S.Sigy about integrity error.

**Application note:** The integrity of TSF data like RAD shall be protected to ensure the effectiveness of the user authentication. This protection is a specific aspect of the security architecture (cf. ADV\_ARC.1).

### 9.1.3 Identification and authentication (FIA)

#### 9.1.3.1 FIA\_UID.1

#### Timing of identification

Hierarchical to: No other components.

Dependencies: No dependencies.

FIA\_UID.1.1

The TSF shall allow

- 1) Self-test according to FPT\_TST.1
- 2) Read EF.CardAccess
- 3) Execute Authentication Procedure (see 0)
- 4) Select File
- 5) Verification of the RAD<sup>13</sup>

on behalf of the user to be performed before the user is identified

FIA\_UID.1.2

The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

#### 9.1.3.2 FIA\_UAU.1

#### Timing of authentication

Hierarchical to: No other components.

Dependencies: FIA\_UID.1 Timing of identification.

---

<sup>13</sup> [assignment: list of additional TSF-mediated actions]

FIA\_UAU.1.1

The TSF shall allow

- 1) Self-test according to FPT\_TST.1,
- 2) Identification of the user by means of TSF required by FIA\_UID.1
- 3) Establishing a trusted channel between the HID and the TOE by means of TSF required by FTP\_ITC.1/VAD

on behalf of the user to be performed before the user is authenticated.

FIA\_UAU.1.2

The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

### 9.1.3.3 FIA\_AFL.1

#### Authentication failure handling

Hierarchical to: No other components.

Dependencies: FIA\_UAU.1 Timing of authentication

FIA\_AFL.1.1

The TSF shall detect when the allowed number fixed by the Personalizer for<sup>14</sup> unsuccessful authentication attempts occur related to consecutive failed authentication attempts.

FIA\_AFL .1.2

When the defined number of unsuccessful authentication attempts has been met, the TSF shall block the RAD.

## 9.1.4 Security Management (FMT)

### 9.1.4.1 FMT\_SMR.1

#### Security roles

Hierarchical to: No other components.

Dependencies: FIA\_UID.1 Timing of identification.

FMT\_SMR.1.1

The TSF shall maintain the roles R.Admin and R.Sigy.

---

<sup>14</sup> [selection: [assignment: positive integer number], an administrator configurable positive integer within [assignment: range of acceptable values]]

FMT\_SMR.1.2

The TSF shall be able to associate users with roles.

#### 9.1.4.2 FMT\_SMF.1

#### Security management functions

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FMT\_SMF.1.1

The TSF shall be capable of performing the following management functions:

- Creation and modification of RAD,
- Management of data related to the Authentication Procedure (see 0)
- Enabling the signature creation function,
- Modification of the security attribute SCD/SVD management, SCD operational,
- Change the default value of the security attribute SCD Identifier.

#### 9.1.4.3 FMT\_MOF.1

#### Management of security functions behavior

Hierarchical to:

No other components.

Dependencies:

FMT\_SMR.1 Security roles

FMT\_SMF.1 Specification of Management Functions.

FMT\_MOF.1.1

The TSF shall restrict the ability to enable the functions signature creation function to R.Sigy.

#### 9.1.4.4 FMT\_MSA.1/Admin

#### Management of security attributes

Hierarchical to:

No other components.

Dependencies:

[FDP\_ACC.1 Subset access control, or

FDP\_IFC.1 Subset information flow control]

FMT\_SMR.1 Security roles

FMT\_SMF.1 Specification of Management Functions

FMT\_MSA.1.1/ Admin

The TSF shall enforce the SCD Import SFP to restrict the ability to modify<sup>15</sup> the security attributes SCD/SVD management to R.Admin.

#### 9.1.4.5 FMT\_MSA.1/Signatory

#### Management of security attributes

Hierarchical to:

No other components.

Dependencies:

[FDP\_ACC.1 Subset access control, or

FDP\_IFC.1 Subset information flow control]

FMT\_SMR.1 Security roles

FMT\_SMF.1 Specification of Management Functions

FMT\_MSA.1.1/Signatory

The TSF shall enforce the Signature Creation SFP to restrict the ability to modify the security attributes SCD operational to R.Sigy.

#### 9.1.4.6 FMT\_MSA.2

#### Secure security attributes

Hierarchical to:

No other components

Dependencies:

[FDP\_ACC.1 Subset access control, or

FDP\_IFC.1 Subset information flow control]

FMT\_MSA.1 Management of security attributes

FMT\_SMR.1 Security roles

FMT\_MSA.2.1

The TSF shall ensure that only secure values are accepted for SCD/SVD Management and SCD operational.

#### 9.1.4.7 FMT\_MSA.3

#### Static attribute initialisation

Hierarchical to:

No other components

Dependencies:

FMT\_MSA.1 Management of security attributes

FMT\_SMR.1 Security roles

---

<sup>15</sup> [assignment: other operations]

FMT\_MSA.3.1

The TSF shall enforce the SCD Import SFP and Signature Creation SFP to provide restrictive default values for security attributes that are used to enforce the SFP.

FMT\_MSA.3.2

The TSF shall allow the R.Admin to specify alternative initial values to override the default values when an object or information is created.

#### 9.1.4.8 FMT\_MSA.4

#### Security attribute value inheritance

Hierarchical to: No other components.  
Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]

FMT\_MSA.4.1

The TSF shall use the following rules to set the value of security attributes:

- If S.Admin imports SCD while S.Sigy is not currently authenticated, the security attribute “SCD operational” of the SCD shall be set to “no” after import of the SCD as a single operation.
- If S.Admin imports SCD while S.Sigy is currently authenticated, the security attribute “SCD operational” of the SCD shall be set to “yes” after import of the SCD as a single operation.

#### 9.1.4.9 FMT\_MTD.1/Admin

#### Management of TSF data

Hierarchical to: No other components.  
Dependencies: FMT\_SMR.1 Security roles  
FMT\_SMF.1 Specification of Management Functions

FMT\_MTD.1.1/Admin

The TSF shall restrict the ability to create the RAD to R.Admin.

#### 9.1.4.10 FMT\_MTD.1/Signatory

#### Management of TSF data

Hierarchical to: No other components.  
Dependencies: FMT\_SMR.1 Security roles

FMT\_SMF.1 Specification of Management Functions

FMT\_MTD.1.1/Signatory                      The TSF shall restrict the ability to modify<sup>16</sup> the RAD to R.Sigy.

### 9.1.5 Protection of the TSF (FPT)

#### 9.1.5.1 FPT\_EMS.1

#### TOE Emanation

Hierarchical to:                      No other components.

Dependencies:                      No dependencies.

FPT\_EMS.1.1

The TOE shall not emit power variations, timing variations during command execution in excess of unuseful information<sup>17</sup> enabling access to RAD and SCD.

FPT.EMS.1.2

The TSF shall ensure unauthorized users<sup>18</sup> are unable to use the following interface IC contacts<sup>19</sup> to gain access to RAD and SCD.

#### 9.1.5.2 FPT\_FLS.1

#### Failure with preservation of secure state

Hierarchical to:                      No other components.

Dependencies:                      No dependencies.

FPT\_FLS.1.1

The TSF shall preserve a secure state when the following types of failures occur:

- self-test according to FPT\_TST fails
- Exposure to out-of-range operating conditions that could lead to malfunction<sup>20</sup>.

---

<sup>16</sup> [assignment: other operations]

<sup>17</sup> [assignment: specified limits]

<sup>18</sup> [assignment: type of users]

<sup>19</sup> [assignment: type of connection]

<sup>20</sup> [assignment: list of other types of failures in the TSF]



### 9.1.5.3 FPT\_PHP.1

#### Passive detection of physical attack

Hierarchical to: No other components.

Dependencies: No dependencies.

FPT\_PHP.1.1

The TSF shall provide unambiguous detection of physical tampering that might compromise the TSF.

FPT\_PHP.1.2

The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.

### 9.1.5.4 FPT\_PHP.3

#### Resistance to physical attack

Hierarchical to: No other components.

Dependencies: No dependencies.

FPT\_PHP.3.1

The TSF shall resist physical manipulation and physical probing<sup>21</sup> to the TSF<sup>22</sup> by responding automatically such that the SFRs are always enforced.

### 9.1.5.5 FPT\_TST.1

#### TSF testing

Hierarchical to: No other components.

Dependencies: No dependencies.

FPT\_TST.1.1

The TSF shall run a suite of self-tests

- At reset
- Before any cryptographic operation
- When accessing a Data Group or any EF
- Prior to any use of TSF data
- Before execution of any command<sup>23</sup>

---

<sup>21</sup> [assignment: physical tampering scenarios]

<sup>22</sup> [assignment: list of TSF devices/elements]

to demonstrate the correct operation of the TSF.

FPT\_TST.1.2

The TSF shall provide authorized users with the capability to verify the integrity of TSF data.

FPT\_TST.1.3

The TSF shall provide authorized users with the capability to verify the integrity of TSF.

#### 9.1.5.6 FTP\_ITC.1/SCD

#### Inter-TSF trusted channel

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FTP\_ITC.1.1/SCD

The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP\_ITC.1.2/SCD

The TSF shall permit another trusted IT product to initiate communication via the trusted channel.

FTP\_ITC.1.3/SCD

The TSF shall initiate communication via the trusted channel for  
(1) Data exchange integrity according to FDP\_UCT.1/SCD,  
(2) Receiving SCD by means of TSF required by FDP\_ITC.1/SCD<sup>24</sup>.

#### FDP\_UIT.1/DTBS

#### Data exchange integrity

Hierarchical to:

No other components.

Dependencies:

[FDP\_ACC.1 Subset access control , or

<sup>23</sup> [selection: during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions [assignment: conditions under which self-test should occur]]

<sup>24</sup> [assignment: list of other functions for which a trusted channel is required]

FDP\_IFC.1 Subset information flow control]

[FTP\_ITC Inter-TSF trusted channel, or

FTP\_TRP.1 Trusted path]

FDP\_UIT.1.1/DTBS

The TSF shall enforce the Signature Creation SFP to receive user data in a manner protected from modification and insertion errors.

FDP\_UIT.1.2/DTBS

The TSF shall be able to determine on receipt of user data, whether modification and insertion has occurred.

**FTP\_ITC.1/VAD**

**Inter-TSF trusted channel – TC Human Interface Device**

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FTP\_ITC.1.1/VAD

The TSF shall provide a communication channel between itself and another trusted IT product **HID** that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP\_ITC.1.2/VAD

The TSF shall permit the remote trusted IT product to initiate communication via the trusted channel.

FTP\_ITC.1.3/VAD

The TSF **or the HID** shall initiate communication via the trusted channel for

(1) User authentication according to FIA UAU.1<sup>25</sup>.

**FTP\_ITC.1/DTBS**

**Inter-TSF trusted channel – Signature Creation Application**

Hierarchical to:

No other components.

Dependencies:

No dependencies.

<sup>25</sup> [assignment: list of other functions for which a trusted channel is required]

FTP\_ITC.1.1/DTBS

The TSF shall provide a communication channel between itself and another trusted IT product **SCA** that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP\_ITC.1.2/DTBS

The TSF shall permit the remote trusted IT product to initiate communication via the trusted channel.

FTP\_ITC.1.3/DTBS

The TSF **or the SCA** shall initiate communication via the trusted channel for

(1) Signature creation<sup>26</sup>.

## 9.2 Security Functional Requirements for Manufacturing, Personalization and Loading of Additional Code

This chapter covers the Manufacturing and Personalisation SFR. It also includes additional SFRs for the compliance with the Loading of Additional Code.

### 9.2.1 SFRs for additional code

#### 9.2.1.1 FAU\_STG.2/MP\_Add\_code

#### Guarantees of audit data availability

FAU\_STG.2.1/MP\_Add\_Code

The TSF shall protect the stored audit records in the audit trail from unauthorized deletion.

FAU\_STG.2.2/MP\_Add\_code

The TSF shall be able to prevent unauthorized modifications to the stored audit records in the audit trail.

FAU\_STG.2.3/MP\_Add\_code

The TSF shall ensure that Additional code identification stored audit records will be maintained when the following conditions occur: failure and attack.

---

<sup>26</sup> [assignment: *list of other functions for which a trusted channel is required*]

**Application Note:** Additional code is loaded with its integrity information. This integrity information is verified by the TOE after the loading and before the writing of the identification information by calculating the signature and comparing it to the expected value. The signature is protected in integrity through the TOE lifecycle: At each power on, the card verifies the integrity of this signature.

#### 9.2.1.2 FCS\_CKM.1/MP\_Add\_code

#### Cryptographic key generation

FCS\_CKM.1.1/MP\_Add\_code

The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm Calculation of LSK\_LOAD, from initial LSK and derivation data entered - AES 128 ECB<sup>27</sup> and specified cryptographic key sizes 128 bits<sup>28</sup> that meet the following: none<sup>29</sup>:

#### 9.2.1.3 FCS\_COP.1/MP\_ENC\_Add\_code

#### Cryptographic operation

FCS\_COP.1.1/MP\_ENC\_Add\_code

The TSF shall perform Decryption of the additional code (ciphered with LSK\_LOAD) and signature verification<sup>30</sup> in accordance with a specified cryptographic algorithm AES<sup>31</sup> and cryptographic key sizes 128 bits<sup>32</sup> that meet the following: [R51]<sup>33</sup>.

#### 9.2.1.4 FCS\_COP.1/MP\_MAC\_Add\_code

#### Cryptographic operation

FCS\_COP.1.1/MP\_MAC\_Add\_code

The TSF shall perform Secure Messaging with AES<sup>34</sup> in accordance with a specified cryptographic algorithm AES CMAC<sup>35</sup> and cryptographic key sizes 128 bits<sup>36</sup> that meet the following: [R51]<sup>37</sup>.

---

<sup>27</sup> [cryptographic key generation algorithm]

<sup>28</sup> [key length]

<sup>29</sup> [standard]

<sup>30</sup> [cryptographic operation]

<sup>31</sup> [cryptographic algorithm]

<sup>32</sup> [cryptographic key sizes]

<sup>33</sup> [standard]

<sup>34</sup> [cryptographic operation]

<sup>35</sup> [cryptographic algorithm]

<sup>36</sup> [cryptographic key sizes]

<sup>37</sup> [standard]

**9.2.1.5 FDP\_UIT.1/MP\_Add\_code**

**Data exchange integrity**

FDP\_UIT.1.1/MP\_Add\_code

The TSF shall enforce the Pre-personalization access control SFP to receive user data in a manner protected from modification errors.

FDP\_UIT.1.2/MP\_Add\_code

**[Editorially Refined]** The TSF shall be able to determine on receipt of user data, whether modification of some of the pieces of the application sent by the TOE developer has occurred.

**Application Note:** Modification errors should be understood as modification, substitution, unrecoverable ordering change of data and any other integrity error that may cause the additional code to be installed on the card to be different from the one sent by the TOE Developer. This SFR controls integrity of data import in phase 5, including the additional code but not only.

**9.2.1.6 FMT\_MTD.1/MP\_Add\_code**

**Management of TSF data**

FMT\_MTD.1.1/MP\_Add\_code

The TSF shall restrict the ability to activate<sup>38</sup> the additional code<sup>39</sup> to TOE developer<sup>40</sup>.

**Application note:** The Activation of the additional code modifies the TOE. This additional code is ciphered with the LSK\_LOAD (LSK and Derivation Data) and activated after the authentication of the TOE developer.

**9.2.1.7 FMT\_MTD.1/MP\_KEY\_READ\_Add\_code**

**Management of TSF data**

FMT\_MTD.1.1/MP\_KEY\_READ\_Add\_code

The TSF shall restrict the ability to read the LSK<sup>41</sup> to none<sup>42</sup>.

**9.2.1.8 FMT\_SMR.1/MP\_Add\_Code**

**Security roles**

FMT\_SMR.1.1/MP\_Add\_code

The TSF shall maintain the roles TOE developer.

FMT\_SMR.1.2/MP\_Add\_code

The TSF shall be able to associate users with roles.

<sup>38</sup> [selection]

<sup>39</sup> [list of TSF data]

<sup>40</sup> [authorized identified roles]

<sup>41</sup> [data]

<sup>42</sup> [authorized identified roles]

#### 9.2.1.9 *FPT\_EMS.1/MP\_Add\_code*

#### TOE Emanation

FPT\_EMS.1.1/MP\_Add\_code

The TOE shall not emit power variations, timing variations during command execution in excess of non-useful information enabling access to LSK.

FPT\_EMS.1.2/MP\_Add\_code

The TSF shall ensure any unauthorized users are unable to use the following interface smart card circuit contacts to gain access to LSK.

#### 9.2.1.10 *FTP\_ITC.1/MP\_Add\_code*

#### Inter-TSF trusted channel

FTP\_ITC.1.1/MP\_Add\_code

The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP\_ITC.1.2/MP\_Add\_code

**[Editorially Refined]** The TSF shall permit the TOE Developer and Pre-personalizer to initiate communication via the trusted channel.

FTP\_ITC.1.3/MP\_Add\_code

The TSF shall initiate communication via the trusted channel for Additional code loading.

## 9.2.2 Manufacturing and Personalization

#### 9.2.2.1 *FCS\_CKM.1/MP*

#### Cryptographic key generation

FCS\_CKM.1.1/MP

The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm MSK derivation from initial MSK loaded in phase 1 using SHA 256<sup>43</sup> and specified cryptographic key sizes 256 bits<sup>44</sup> that meet the following: none<sup>45</sup>.

---

<sup>43</sup> [cryptographic key generation algorithm]

<sup>44</sup> [key length]

<sup>45</sup> [standard]

#### 9.2.2.2 FCS\_COP.1/MP\_ENC\_3DES

FCS\_COP.1.1/MP\_ENC\_3DES

#### Cryptographic operation

The TSF shall perform Secure Messaging – encryption and decryption<sup>46</sup> in accordance with a specified cryptographic algorithm 3DES in CBC mode<sup>47</sup> and cryptographic key sizes 112 bits<sup>48</sup> that meet the following: [\[R48\]](#)<sup>49</sup>

#### 9.2.2.3 FCS\_COP.1/MP\_ENC\_AES

FCS\_COP.1.1/MP\_ENC\_AES

#### Cryptographic operation

The TSF shall perform Secure Messaging – encryption and decryption<sup>50</sup> in accordance with a specified cryptographic algorithm AES in CBC mode<sup>51</sup> and cryptographic key sizes 128, 192 abd 256 bits<sup>52</sup> that meet the following: [\[R51\]](#)<sup>53</sup>

#### 9.2.2.4 FCS\_COP.1/MP\_MAC\_3DES

FCS\_COP.1.1/MP\_MAC\_3DES

#### Cryptographic operation

The TSF shall perform Secure Messaging MAC<sup>54</sup> in accordance with a specified cryptographic algorithm 3DES MAC<sup>55</sup> and cryptographic key sizes 112 bits<sup>56</sup> that meet the following: [\[R15\]](#)<sup>57</sup>

#### 9.2.2.5 FCS\_COP.1/MP\_MAC\_AES

FCS\_COP.1.1/MP\_MAC\_AES

#### Cryptographic operation

The TSF shall perform Secure Messaging MAC<sup>58</sup> in accordance with a specified cryptographic algorithm AES<sup>59</sup> and cryptographic key sizes 128, 192 abd 256 bits<sup>60</sup> that meet the following: [\[R51\]](#)<sup>61</sup>

---

<sup>46</sup> [cryptographic operation]

<sup>47</sup> [cryptographic operation]

<sup>48</sup> [cryptographic key sizes]

<sup>49</sup> [standard]

<sup>50</sup> [cryptographic operation]

<sup>51</sup> [cryptographic operation]

<sup>52</sup> [cryptographic key sizes]

<sup>53</sup> [standard]

<sup>54</sup> [cryptographic operation]

<sup>55</sup> [cryptographic operation]

<sup>56</sup> [cryptographic key sizes]

<sup>57</sup> [standard]

<sup>58</sup> [cryptographic operation]

<sup>59</sup> [cryptographic operation]

<sup>60</sup> [cryptographic key sizes]

<sup>61</sup> [standard]



**9.2.2.6 FCS\_COP.1/MP\_AUTH\_3DES**

**Cryptographic operation**

FCS\_COP.1.1/MP\_AUTH\_3DES

The TSF shall perform Card Manufacturer Authentication<sup>62</sup> in accordance with a specified cryptographic algorithm 3DES<sup>63</sup> and cryptographic key sizes 112 bits<sup>64</sup> that meet the following: [\[R48\]](#)<sup>65</sup>

**9.2.2.7 FCS\_COP.1/MP\_AUTH\_AES**

**Cryptographic operation**

FCS\_COP.1.1/MP\_AUTH\_AES

The TSF shall perform Card Manufacturer Authentication<sup>66</sup> in accordance with a specified cryptographic algorithm AES<sup>67</sup> and cryptographic key sizes 128, 192 and 256 bits<sup>68</sup> that meet the following: [\[R51\]](#)<sup>69</sup>

**9.2.2.8 FCS\_COP.1/MP\_SHA**

**Cryptographic operation**

FCS\_COP.1.1/MP\_SHA

The TSF shall perform Hashing<sup>70</sup> in accordance with a specified cryptographic algorithm SHA256<sup>71</sup> and cryptographic key sizes none<sup>72</sup> that meet the following: [\[R43\]](#)<sup>73</sup>

**9.2.2.9 FDP\_ACC.2/MP**

**Complete access control**

FDP\_ACC.2.1/MP

The TSF shall enforce the Pre-personalization Access Control on all subjects and all objects and all operations among subjects and objects covered by the SFP.

FDP\_ACC.2.2/MP

The TSF shall ensure that all operations between any subject controlled by the TSF and any object controlled by the TSF are covered by an access control SFP.

---

<sup>62</sup> [cryptographic operation]

<sup>63</sup> [cryptographic operation]

<sup>64</sup> [cryptographic key sizes]

<sup>65</sup> [standard]

<sup>66</sup> [cryptographic operation]

<sup>67</sup> [cryptographic operation]

<sup>68</sup> [cryptographic key sizes]

<sup>69</sup> [standard]

<sup>70</sup> [cryptographic operation]

<sup>71</sup> [cryptographic operation]

<sup>72</sup> [cryptographic key sizes]

<sup>73</sup> [standard]

**Application Note:** This SFR enforces access control over all the operation performed in phase 5, including additional code loading but not only.

#### 9.2.2.10 FDP\_ACF.1/MP

##### Security attribute based access control

FDP\_ACF.1.1/MP

The TSF shall enforce the Pre-personalization Access Control to objects based on the following Pre-personalizer Authentication (AS\_AUTH\_MSK\_STATUS).

FDP\_ACF.1.2/MP

The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: AS\_AUTH\_MSK\_STATUS=TRUE (EXTERNAL AUTHENTICATE).

FDP\_ACF.1.3/MP

The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: none.

FDP\_ACF.1.4/MP

The TSF shall explicitly deny access of subjects to objects based on the following additional rules: none.

**Application Note:** This SFR enforces access control over all the operation in phase 5, including additional code loading but not only.

#### 9.2.2.11 FDP\_ITC.1/MP

##### Import of user data without security attributes

FDP\_ITC.1.1/MP

The TSF shall enforce the Pre-personalization access control when importing user data, controlled under the SFP, from outside of the TOE.

FDP\_ITC.1.2/MP

The TSF shall ignore any security attributes associated with the user data when imported from outside the TOE.

FDP\_ITC.1.3/MP

The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TOE: none.

**Application Note:** This SFR controls import of data in phase 5, including the additional code but not only. This SFR ensures also the MSK diversification, which is performed once, at first command, without any security requirements preliminary to this action.

#### 9.2.2.12 FDP\_UCT.1/MP

#### Basic data exchange confidentiality

FDP\_UCT.1.1/MP

The TSF shall enforce the Pre-personalization access control to receive user data in a manner protected from unauthorized disclosure.

**Application note:** For the Additional code loading access control, the LSK\_LOAD is used to cipher the data transmitted. This SFR controls confidentiality of data import in phase 5, including the additional code but not only.

#### 9.2.2.13 FDP\_UIT.1/MP

#### Data exchange integrity

FDP\_UIT.1.1/MP

The TSF shall enforce the Pre-personalization Access Control SFP to receive user data in a manner protected from modification errors

FDP\_UIT.1.2/MP

**[Editorially refined]** The TSF shall be able to determine on receipt of user data, whether modification of some pieces of the application sent by the Pre-personalizer has occurred

#### 9.2.2.14 FIA\_AFL.1/MP

#### Authentication failure handling

FIA\_AFL.1.1/MP

The TSF shall detect when 3 unsuccessful authentication attempts occur related to authentication of Pre-personalizer and Personalizer

FIA\_AFL.1.2/MP

When the defined number of unsuccessful authentication attempts has been met, the TSF shall slow-down authentication operation of, the Pre-Personalizer and the Personalizer.

**9.2.2.15 FIA\_UAU.1/MP**

FIA\_UAU.1.1/MP

**Timing of authentication**

The TSF shall allow GET DATA, SELECT FILE on behalf of the user to be performed before the user is authenticated.

FIA\_UAU.1.2/MP

The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

**9.2.2.16 FIA\_UID.1/MP**

FIA\_UID.1.1/MP

**Timing of identification**

The TSF shall allow GET DATA, SELECT FILE on behalf of the user to be performed before the user is identified.

FIA\_UID.1.2/MP

The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

**9.2.2.17 FIA\_UAU.4/MP\_3DES**

FIA\_UAU.4.1/MP\_3DES

**Single-use authentication mechanisms**

The TSF shall prevent reuse of authentication data related to Authentication Mechanisms based on 3DES.

**9.2.2.18 FIA\_UAU.4/MP\_AES**

FIA\_UAU.4.1/MP\_AES

**Single-use authentication mechanisms**

The TSF shall prevent reuse of authentication data related to Authentication Mechanisms based on AES.

**9.2.2.19 FIA\_UAU.5/MP\_3DES**

FIA\_UAU.5.1/MP\_3DES

**Multiple authentication mechanisms**

The TSF shall provide Symmetric Authentication Mechanism based on 3DES to support user authentication.

FIA\_UAU.5.2/MP\_3DES

The TSF shall authenticate any user's claimed identity according to the: The TOE accepts the authentication attempt as Personalization Agent by the Symmetric Authentication Mechanism with the Personalization Agent Key.

**9.2.2.20 FIA\_UAU.5/MP\_AES**

FIA\_UAU.5.1/MP\_AES

**Multiple authentication mechanisms**

The TSF shall provide Symmetric Authentication Mechanism based on AES to support user authentication.

FIA\_UAU.5.2/MP\_AES

The TSF shall authenticate any user's claimed identity according to the: The TOE accepts the authentication attempt as Personalization Agent by the Symmetric Authentication Mechanism with the Personalization Agent Key.

**9.2.2.21 FMT\_MTD.1/MP**

FMT\_MTD.1.1/MP

**Management of TSF data**

The TSF shall restrict the ability to switch the TOE lifecycle from phase 5 to phase 6 to the Pre-personalizer.

**9.2.2.22 FTP\_ITC.1/MP**

FTP\_ITC.1.1/MP

**Inter-TSF trusted channel**

The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP\_ITC.1.2/MP

**[Editorially Refined]** The TSF shall permit the Pre-personalizer to initiate communication via the trusted channel.

FTP\_ITC.1.3/MP

The TSF shall initiate communication via the trusted channel for:

- Personalization Agent key storage
- Lifecycle transition from Pre-personalization to Personalization phase

**9.2.2.23 FMT\_MTD.1/MP\_INI\_ENA**

FMT\_MTD.1.1/MP\_INI\_ENA

**Management of TSF data**

The TSF shall restrict the ability to write the Initialization Data and Pre-personalization Data to the Pre-personalizer.

**9.2.2.24 FMT\_MTD.1/MP\_INI\_DIS**

FMT\_MTD.1.1/MP\_INI\_DIS

**Management of TSF data**

The TSF shall restrict the ability to disable read access for users to the Initialization Data to the Pre-personalizer.

**9.2.2.25 FMT\_MTD.1/MP\_KEY\_READ**

FMT\_MTD.1.1/MP\_KEY\_READ

**Management of TSF data**

The TSF shall restrict the ability to read the MSK and Personalization Agent keys to none.

**9.2.2.26 FMT\_MTD.1/MP\_KEY\_WRITE**

FMT\_MTD.1.1/MP\_KEY\_WRITE

**Management of TSF data**

The TSF shall restrict the ability to write the MSK to IC manufacturer (created by the developer) and Personalization Agent keys to none.

**9.2.2.27 FAU\_SAS.1/MP**

FAU\_SAS.1.1/MP

**Audit storage**

The TSF shall provide the Manufacturer with the capability to store the IC Identification Data in the audit records.

**9.2.2.28 FMT\_SMF.1/MP**

FMT\_SMF.1.1/MP

**Specification of Management Functions**

The TSF shall be capable of performing the following management functions:

- Initialization
- Pre-personalization
- Personalization

**9.2.2.29 FMT\_SMR.1/MP**

FMT\_SMR.1.1/MP

**Security Roles**

The TSF shall maintain the roles Manufacturer.

FMT\_SMR.1.2/MP

The TSF shall be able to associate users with roles.

**9.2.2.30 FPT\_EMS.1/MP**

FPT\_EMS.1.1/MP

**TOE Emanation**

The TOE shall not emit power variations, timing variations during command execution in excess of non-useful information enabling access to

1. Pre-personalizer Key
2. Personalization Agent Key
3. MSK

FPT\_EMS.1.2/MP

The TSF shall ensure any unauthorized users are unable to use the following interface smart card circuit contacts to gain access to

1. Pre-personalizer Key
2. Personalization Agent Key
3. MSK

## 10 TOE SUMMARY SPECIFICATION

### 10.1 TOE Summary Specification

#### Pre-personalization

This security functionality ensures that the TOE, when delivered to the Pre-personalization Agent, provides an authentication mechanism for data exchange. This authentication is based on Triple DES or AES symmetric authentication mechanism. The pre-personalization function allows to

- Pre-initialize the product with CPLC data, additional code identification,
- Load and activate additional code if needed,
- Load data in clear text or with secure messaging,
- Load encrypted keys directly or through secure messaging,
- Create the eSign application,
- Load personalization authentication keys.

This functionality is conformant with [\[R61\]](#). The prepersonalizer can use Secure Messaging described in the functionality Secure Messaging to protect integrity and/or confidentiality of the communication.

#### Personalization

This security functionality ensures that the TOE, when delivered to the Personalization Agent, provides authentication for data exchange. This authentication is based on a Triple DES or AES authentication mechanism.

This personalization function allows to

- Load data in clear text or with secure messaging,
- Load encrypted keys directly or through secure messaging,
- Create the eSign application (if not performed during pre-personalization).

The personalizer can use Secure Messaging described in the functionality Secure Messaging to protect integrity and/or confidentiality of the communication.

#### Secure Messaging

This security functionality ensures the confidentiality, authenticity and integrity of the communication between the TOE and the interface device. In the operational phase, after a successful Authentication Procedure (see 0), a secure channel is established.

This security functionality also provides a Secure Messaging (SCP02 and SCP03) for the pre-personalization and personalization phases. The protocols can be configured to protect the exchanges integrity and/or confidentiality.

If an error occurs in the secure messaging layer, the session keys are destroyed.

#### Access Control in reading

This function controls access to read functions and enforces the security policy for data retrieval. Prior to any data retrieval, it authenticates the actor attempting to access the data, and checks that the access



conditions as well as the life cycle state are fulfilled. It ensures that at any time, the following keys are never readable:

- Personalization Agent keys
- MSK and LSK
- Chip Authentication keys,
- The signature keys

It controls access to the CPLC data as well:

- It ensures the CPLC data can be read during the personalization phase
- It ensures it cannot be readable without authentication at the end of the personalization

step

If the SCD is deleted, no data related to it can be accessed anymore.

In operational use phase, the three functionalities of the eSign application can only be accessed with the corresponding authorization. These functionalities are RAD management, Signature Key management and Signature creation. The access control to these three functions is assured by executing the Authentication Procedure (see 0) proving the possession of the necessary rights.

### **Access Control in writing**

This function controls access to write functions (in EEPROM) and enforces the security policy for data writing. Prior to any data update, it authenticates the actor, and checks that the access conditions as well as the life cycle state are fulfilled. It also ensures that the CPLC data (data uniquely identifying the chip) can not be written anymore once the TOE is personalized and that it is not possible to load or modify an additional code. It ensures that the DTBS cannot be altered.

If the RAD is blocked, the function insures that no writing of any data is possible anymore in operational use phase.

In operational phase, the three functionalities of the eSign application can only be accessed with the corresponding authorization. These functionalities are RAD management, Signature Key management and Signature creation. The access control to these three functions is assured by executing the Authentication Procedure (see 0) proving the possession of the necessary rights.

### **Signature Creation**

This functionality provides the following functions:

- Sign Data (PERFORM SECURITY OPERATION Command) with RSA or Elliptic Curve keys such that the SCD cannot be reverse-engineered from a known signature and the integrity of the DTBS is assured.

For a signature to be created, the Signature Creation functionality assures that

- the user has successfully authenticated with the rights required for R.Sigy,
- the SCD is operational,
- the integrity of the card data and the DTBS has been confirmed.

This security functionality manages the signature computation respecting the rights corresponding with

[\[R5\]](#).

### Signature Key Management

This functionality provides the following functions:

- Import Key only by an authorized user (PUT DATA SECURITY DATA OBJECT Command)
- Terminate Key (TERMINATE Command)

It ensures the correspondence and uniqueness of SVD and SCD.

It controls access to the Signature keys SVD/SCD, depending on the roles (User, Admin).

### RAD Management

The modification and creation rights of the RAD depending on the roles (Sigy, Admin) are enforced by this function.

This functionality provides the following functions:

- Set PIN (CHANGE REFERENCE DATA Command)
- Verify PIN (VERIFY PIN Command)
- Change PIN (CHANGE REFERENCE DATA Command)
- Unblock PIN (RESET RETRY COUNTER Command)
- Terminate PIN (TERMINATE Command)
- Activate PIN (ACTIVATE PIN Command)
- Deactivate PIN (DEACTIVATE PIN Command)

It is used to verify the will of the Signatory to sign data.

### Physical protection

This security functionality protects the TOE against physical attacks so that the integrity and confidentiality of TOE data is ensured, including the SCD, the DTBS, the RAD, the CPLC and the TOE ID. It detects physical tampering, responds automatically, and also controls the emanations sent out by the TOE.

### Secure state management

This security functionality ensures that the TOE gets back to a secure state when

- an integrity error is detected during self-testing (including detection of corrupted data or physical tampering),
- a tearing occurs (during a copy of data in EEPROM).

This security functionality ensures that if such a case occurs, the TOE is either switched to the state "kill card" or becomes mute. This includes assuring the atomic activation of additional code.

### Self-tests

The TOE performs self-tests to verify the integrity of the TSF data:

- Before the TSF data usage
- The additional code integrity is checked at each POWER ON of the card
- The integrity of keys and sensitive data is ensured (including the DTBS and the TOE ID)

## 11 RATIONALES

### 11.1 Security objectives and Security Problem Definition

### 11.2 Security objectives rationale

#### 11.2.1 Security objectives backtracking

The columns and lines with green background are the elements added to the PP SSCD-2.

|                | OT.Lifecycle_Security | OT.SCD_Auth_Imp | OT.SCD_Secrecy | OT.Sig_Secure | OT.Sig_SigF | OT.DTBS_Integrity_TOE | OT.EMSEC_Design | OT.Tamper_ID | OT.Tamper_Resistance | OT.TOE_TC_VAD_Imp | OT.TOE_TC_DTBS_Imp | OT.Secure_Load_ACode | OT.Secure_AC_Activation | OT.TOE_Identification | OT.Pre_Perso | OT.Perso | OE.SCD/SVD_Auth_Gen | OE.SCD_Secrecy | OE.SCD_Unique | OE.SCD_SVD_Corresp | OE.CGA_QCert | OE.SVD_Auth | OE.SSCD_Prov_Service | OE.HID_TC_VAD_Exp | OE.DTBS_Intend | OE.SCA_TC_DTBS_Exp | OE.Signatory |
|----------------|-----------------------|-----------------|----------------|---------------|-------------|-----------------------|-----------------|--------------|----------------------|-------------------|--------------------|----------------------|-------------------------|-----------------------|--------------|----------|---------------------|----------------|---------------|--------------------|--------------|-------------|----------------------|-------------------|----------------|--------------------|--------------|
| T.SCD_Divulg   |                       | X               | X              |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          | X                   | X              |               |                    |              |             |                      |                   |                |                    |              |
| T.SCD_Derive   |                       |                 |                | X             |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                | X             |                    |              |             |                      |                   |                |                    |              |
| T.Hack_Phys    |                       |                 | X              |               |             |                       | X               | X            | X                    |                   |                    |                      |                         |                       |              |          |                     |                |               |                    |              |             |                      |                   |                |                    |              |
| T.SVD_Forgery  |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                |               | X                  |              | X           |                      |                   |                |                    |              |
| T.SigF_Misuse  | X                     |                 |                |               | X           | X                     |                 |              |                      | X                 | X                  |                      |                         |                       |              |          |                     |                |               |                    |              |             |                      | X                 | X              | X                  | X            |
| T.DTBS_Forgery |                       |                 |                |               |             | X                     |                 |              |                      |                   | X                  |                      |                         |                       |              |          |                     |                |               |                    |              |             |                      | X                 | X              |                    |              |
| T.Sig_Forgery  |                       |                 |                | X             |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                | X             | X                  |              |             |                      |                   |                |                    |              |
| T.Unau         |                       |                 |                |               |             |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |                     |                |               |                    |              |             |                      |                   |                |                    |              |

|                                          | OT.Lifecycle_Security | OT.SCD_Auth_Imp | OT.SCD_Secrecy | OT.Sig_Secure | OT.Sig_SigF | OT.DTBS_Integrity_TOE | OT.EMSEC_Design | OT.Tamper_ID | OT.Tamper_Resistance | OT.TOE_TC_VAD_Imp | OT.TOE_TC_DTBS_Imp | OT.Secure_Load_ACode | OT.Secure_AC_Activation | OT.TOE_Identification | OT.Pre_Perso | OT.Perso | OE.SCD/SVD_Auth_Gen | OE.SCD_Secrecy | OE.SCD_Unique | OE.SCD_SVD_Corresp | OE.CGA_QCert | OE.SVD_Auth | OE.SSCD_Prov_Service | OE.HID_TC_VAD_Exp | OE.DTBS_Intend | OE.SCA_TC_DTBS_Exp | OE.Siggnatory |
|------------------------------------------|-----------------------|-----------------|----------------|---------------|-------------|-----------------------|-----------------|--------------|----------------------|-------------------|--------------------|----------------------|-------------------------|-----------------------|--------------|----------|---------------------|----------------|---------------|--------------------|--------------|-------------|----------------------|-------------------|----------------|--------------------|---------------|
| thorize<br>d_Load                        |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                |               |                    |              |             |                      |                   |                |                    |               |
| T.Bad_<br>Activati<br>on                 |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      | X                       |                       |              |          |                     |                |               |                    |              |             |                      |                   |                |                    |               |
| T.TOE<br>_Identif<br>ication_<br>Forgery |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         | X                     |              |          |                     |                |               |                    |              |             |                      |                   |                |                    |               |
| T.Pre_<br>Perso                          |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       | X            |          |                     |                |               |                    |              |             |                      |                   |                |                    |               |
| T.Perso                                  |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              | X        |                     |                |               |                    |              |             |                      |                   |                |                    |               |
| P.CSP_<br>QCert                          | X                     | X               |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          | X                   |                |               | X                  | X            |             |                      |                   |                |                    |               |
| P.QSig<br>n                              |                       |                 |                | X             | X           |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                |               |                    | X            |             |                      |                   | X              |                    |               |
| P.Sigy_<br>SSCD                          | X                     | X               | X              | X             | X           | X                     | X               |              | X                    |                   |                    |                      |                         |                       |              |          | X                   | X              | X             |                    |              |             | X                    |                   |                |                    |               |
| P.Sig_<br>Non-<br>Repud                  | X                     |                 | X              | X             | X           | X                     | X               | X            | X                    | X                 | X                  |                      |                         |                       |              |          | X                   | X              | X             | X                  | X            | X           | X                    | X                 | X              | X                  | X             |
| A.CGA                                    |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                |               |                    | X            | X           |                      |                   |                |                    |               |
| A.SCA                                    |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |                     |                |               |                    |              |             |                      |                   | X              |                    |               |
| A.CSP                                    |                       |                 |                |               |             |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          | X                   | X              | X             | X                  |              |             |                      |                   |                |                    |               |

**Table 11-1 - Mapping of security problem definition to security objectives**

### 11.2.2 Security objectives sufficiency

The rationales are available in the complete ST.

## 11.3 Security requirements and security objectives

### 11.3.1 Rationale tables of Security Objectives and SFRs

|                              | OT.Lifecycle_Security | OT.SCD_Auth_Imp | OT.SCD_Secrecy | OT.Sig_Secure | OT.Sigy_SigF | OT.DTBS_Integrity_TOE | OT.EMSEC_Design | OT.Tamper_ID | OT.Tamper_Resistance | OT.TOE_TC_VAD_Imp | OT.TOE_TC_DTBS_Imp | OT.Secure_Load_ACode | OT.Secure_AC_Activation | OT.TOE_Identification | OT.Pre_Perso | OT.Perso |
|------------------------------|-----------------------|-----------------|----------------|---------------|--------------|-----------------------|-----------------|--------------|----------------------|-------------------|--------------------|----------------------|-------------------------|-----------------------|--------------|----------|
| FCS_CKM.4                    | X                     |                 | X              |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FCS_COP.1                    | X                     |                 |                | X             |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_ACC.1/SCD_Import         | X                     | X               |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_ACC.1/Signature_Creation | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_ACF.1/SCD_Import         | X                     | X               |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_ACF.1/Signature_Creation | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_ITC.1/SCD                | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_UCT.1/SCD                | X                     |                 | X              |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_RIP.1                    |                       |                 | X              |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_SDI.2/Persistent         |                       |                 | X              | X             |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FDP_SDI.2/DTBS               |                       |                 |                |               | X            | X                     |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FDP_UIT.1/DTBS               |                       |                 |                |               |              |                       |                 |              |                      |                   | X                  |                      |                         |                       |              |          |
| FIA_AFL.1                    |                       |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FIA_UAU.1                    |                       | X               |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FIA_UID.1                    |                       | X               |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FMT_MOF.1                    | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |

|                           | OT.Lifecycle_Security | OT.SCD_Auth_Imp | OT.SCD_Secrecy | OT.Sig_Secure | OT.Sigy_SigF | OT.DTBS_Integrity_TOE | OT.EMSEC_Design | OT.Tamper_ID | OT.Tamper_Resistance | OT.TOE_TC_VAD_Imp | OT.TOE_TC_DTBS_Imp | OT.Secure_Load_ACode | OT.Secure_AC_Activation | OT.TOE_Identification | OT.Pre_Perso | OT.Perso |
|---------------------------|-----------------------|-----------------|----------------|---------------|--------------|-----------------------|-----------------|--------------|----------------------|-------------------|--------------------|----------------------|-------------------------|-----------------------|--------------|----------|
| FMT_MSA.1/Admin           | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_MSA.1/Signatory       | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_MSA.2                 | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_MSA.3                 | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_MSA.4                 | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_MTD.1/Admin           | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_MTD.1/Signatory       | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FMT_SMR.1                 | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FMT_SMF.1                 | X                     |                 |                |               | X            |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FPT_EMS.1                 |                       |                 | X              |               |              |                       | X               |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FPT_FLS.1                 |                       |                 | X              |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FPT_PHP.1                 |                       |                 |                |               |              |                       |                 | X            |                      |                   |                    |                      |                         |                       | X            | X        |
| FPT_PHP.3                 |                       |                 | X              |               |              |                       |                 |              | X                    |                   |                    |                      |                         |                       | X            | X        |
| FPT_TST.1                 | X                     |                 | X              | X             |              |                       |                 |              |                      |                   |                    |                      |                         | X                     |              |          |
| FTP_ITC.1/SCD             | X                     |                 | X              |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              |          |
| FTP_ITC.1/VAD             |                       |                 |                |               |              |                       |                 |              |                      | X                 |                    |                      |                         |                       |              |          |
| FTP_ITC.1/DTBS            |                       |                 |                |               |              |                       |                 |              |                      |                   | X                  |                      |                         |                       |              |          |
| FAU_STG.2/MP_Add_code     |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    | X                       | X                     |              |          |
| FCS_CKM.1/MP_Add_code     |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FCS_COP.1/MP_ENC_Add_code |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FCS_COP.1/MP_MAC_Add_code |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FDP_UIT.1/MP_Add_code     |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |

|                                | OT.Lifecycle_Security | OT.SCD_Auth_Imp | OT.SCD_Secrecy | OT.Sig_Secure | OT.Sigy_SigF | OT.DTBS_Integrity_TOE | OT.EMSEC_Design | OT.Tamper_ID | OT.Tamper_Resistance | OT.TOE_TC_VAD_Imp | OT.TOE_TC_DTBS_Imp | OT.Secure_Load_ACode | OT.Secure_AC_Activation | OT.TOE_Identification | OT.Pre_Perso | OT.Perso |
|--------------------------------|-----------------------|-----------------|----------------|---------------|--------------|-----------------------|-----------------|--------------|----------------------|-------------------|--------------------|----------------------|-------------------------|-----------------------|--------------|----------|
| FMT_MTD.1/MP_Add_code          |                       |                 |                |               |              |                       |                 |              |                      |                   |                    |                      | X                       |                       |              |          |
| FMT_MTD.1/MP_KEY_READ_Add_code |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FMT_SMR.1/MP_Add_code          |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FPT_EMS.1/MP_Add_code          |                       |                 |                |               |              |                       | X               |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FTP_ITC.1/MP_Add_code          |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FCS_CKM.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FCS_COP.1/MP_ENC_3DES          |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FCS_COP.1/MP_ENC_AES           |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FCS_COP.1/MP_MAC_3DES          |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FCS_COP.1/MP_MAC_AES           |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FCS_COP.1/MP_AUTH_3DES         |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FCS_COP.1/MP_AUTH_AES          |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FCS_COP.1/MP_SHA               |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FDP_ACC.2/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FDP_ACF.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FDP_ITC.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FDP_UCT.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FDP_UIT.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            |          |
| FIA_AFL.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FIA_UAU.1/MP                   |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |

|                        | OT.Lifecycle_Security | OT.SCD_Auth_Imp | OT.SCD_Secrecy | OT.Sig_Secure | OT.Sigy_SigF | OT.DTBS_Integrity_TOE | OT.EMSEC_Design | OT.Tamper_ID | OT.Tamper_Resistance | OT.TOE_TC_VAD_Imp | OT.TOE_TC_DTBS_Imp | OT.Secure_Load_ACode | OT.Secure_AC_Activation | OT.TOE_Identification | OT.Pre_Perso | OT.Perso |
|------------------------|-----------------------|-----------------|----------------|---------------|--------------|-----------------------|-----------------|--------------|----------------------|-------------------|--------------------|----------------------|-------------------------|-----------------------|--------------|----------|
| FIA_UID.1/MP           |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       |              |          |
| FIA_UAU.4/MP_3DES      |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FIA_UAU.4/MP_AES       |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            | X        |
| FIA_UAU.5/MP_3DES      | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              | X        |
| FIA_UAU.5/MP_AES       | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              | X        |
| FMT_MTD.1/MP           |                       |                 |                |               |              |                       |                 |              |                      |                   |                    | X                    |                         |                       | X            |          |
| FTP_ITC.1/MP           |                       |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FMT_MTD.1/MP_INI_ENA   | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            |          |
| FMT_MTD.1/MP_INI_DIS   | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            |          |
| FMT_MTD.1/MP_KEY_READ  | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              | X        |
| FMT_MTD.1/MP_KEY_WRITE | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       |              | X        |
| FAU_SAS.1/MP           |                       |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         | X                     |              |          |
| FMT_SMF.1/MP           | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FMT_SMR.1/MP           | X                     |                 |                |               |              |                       |                 |              |                      |                   |                    |                      |                         |                       | X            | X        |
| FPT_EMS.1/MP           | X                     |                 |                |               |              |                       | X               |              |                      |                   |                    |                      |                         |                       | X            | X        |

Table 11-2 - SFR vs Objectives

### 11.3.2 Rationale of Security Objectives and SFRs

The rationales are available in the complete ST.



## 12 REFERENCES

### Specifications

[R1] DIRECTIVE 1999/93/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 13 December 1999 on a Community framework for electronic signatures

[R2] ICAO Doc 9303, Machine Readable Travel Documents, part 1 – Machine Readable Passports, Sixth Edition, 2006, International Civil Aviation Organization

[R3] BSI TR-03110 V2.10 Part 1 eMRTDs with BAC/PACE

[R4] BSI TR-03110 V2.10 Part 2 Extended Access Control Version 2 (EACv2), Password Authenticated Connection Establishment (PACE), and Restricted Identification (RI)

[R22] BSI TR-03110 V2.10 Part 3 Common Specifications

[R23] BSI TR-03117 V1.0 eCard with contactless interface as a secure signature creation device

### Oberthur Specifications

[R15] SRS Auth and Key Management – 079711 00 – Oberthur Technologies

### Protection Profiles

[R7] Protection Profile written in CC version 3.1 revision 3: Protection profiles for secure signature creation device – Part 3: Device with key import. Version 1.0.2, 2012-07-24.

[R9] Information Technology - Personal Identification — ISO Compliant Driving Licence — Part 3: Access control, authentication and integrity validation, ISO/IEC 18013-3:2009

[R26] Smartcard IC Platform Protection Profile v 1.0 - BSI-PP-0035 15/06/2007

[R27] Machine readable travel documents with “ICAO Application”, Basic Access control – BSI- PP-0055 v1.10 25th march 2009

[R28] Machine readable travel documents with “ICAO Application”, Extended Access control – BSI-PP-0056 v1.10 25th march 2009

[R29] Machine readable travel documents with “ICAO Application”, Extended Access Control with PACE (EAC PP) – BSI-PP-0056 V2 – 2012

[R33] Technical Report, Supplemental Access Control for Machine Readable Travel Documents – version v1.01

## Chips References

[R35] Certification report - BSI-DSZ-CC-0837-v2-2014 - NXP Secure Smart Card Controller Controller P60x080/052/040PVC(Y/Z/A)/PVG with IC Dedicated Software

## Standards

[R36] ISO/IEC 7816-4:2013 – Organization, security and commands for interchange

[R37] ISO/IEC 7816-8:2004 – Commands for security operations

[R41] ISO/IEC 9796-2:2002 - Information technology - Security techniques - Digital signature schemes giving message recovery - Part 2: Mechanisms using a hash-function

[R43] Federal Information Processing Standards Publication 180-2 Secure Hash Standard (+ Change Notice to include SHA-224), U.S. DEPARTMENT OF COMMERCE/National Institute of Standards and Technology, 2002 August 1

[R48] FIPS 46-3 Data Encryption Standard (DES)

[R51] FIPS 197 – Advance Encryption Standard (AES)

## CC

[R58] Common Criteria for Information Technology security Evaluation Part 1: Introduction and general model, CCMB-2012-09-001, version 3.1 Revision 4 Final, September 2012

[R59] Common Criteria for Information Technology security Evaluation Part 2: Security Functional Components, CCMB-2012-09-002, version 3.1 Revision 4 Final, September 2012

[R60] Common Criteria for Information Technology security Evaluation Part 3: Security Assurance Components, CCMB-2012-09-003, version 3.1 Revision 4 Final, September 2012

[R61] ANSSI-CC note 6 – v0.91

## 13 ACRONYMS

|        |                                                                          |
|--------|--------------------------------------------------------------------------|
| CA     | Chip Authentication                                                      |
| CC     | Common Criteria                                                          |
| CPLC   | Card Personalization Life Cycle                                          |
| DGA    | Certificate Generation Application                                       |
| DES    | Digital Encryption Standard                                              |
| DTBS/R | Data to be signed or its unique representation                           |
| EAC    | Extended Access Control                                                  |
| EAL    | Evaluation Assurance Level                                               |
| EF     | Elementary File                                                          |
| IC     | Integrated Circuit                                                       |
| HID    | Human Interface Device                                                   |
| LSK    | Load Secret Key (Key for Loading of Additional Code)                     |
| MRTD   | Machine Readable Travel Document                                         |
| MSK    | Manufacturer Secret Key                                                  |
| PP     | Protection Profile                                                       |
| RAD    | Reference Authentication Data. Could be a PIN or a Biometric password    |
| SCA    | Signature Creation Application                                           |
| SCD    | Signature Creation Data                                                  |
| SDO    | Signed Data Object                                                       |
| SHA    | Secure Hashing Algorithm                                                 |
| SFP    | Security Function Policy                                                 |
| SSCD   | Secure Signature Creation Device                                         |
| ST     | Security Target                                                          |
| SVD    | Signature verification data                                              |
| TA     | Terminal Authentication                                                  |
| TOE    | Target Of Evaluation                                                     |
| TSF    | TOE Security Functionality                                               |
| VAD    | Verification Authentication Data. Could be a PIN or a Biometric password |

## 14 LIST OF TABLES AND FIGURES

### Figures

|                                                          |    |
|----------------------------------------------------------|----|
| Figure 1 - Product architecture .....                    | 13 |
| Figure 2 - Product architecture with TOE components..... | 16 |
| Figure 3 - TOE Lifecycle.....                            | 20 |

### Tables

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| Table 1-1 - General Identification.....                                          | 11 |
| Table 1-2 - TOE technical identification .....                                   | 11 |
| Table 1-3 - Chip Identification .....                                            | 12 |
| Table 2-1 - eSign Configurations .....                                           | 14 |
| Table 4-1 - Roles identification on the life cycle .....                         | 21 |
| Table 4-2 - Subjects identification following life cycle steps.....              | 21 |
| Table 5-1 - Conformance Claim .....                                              | 25 |
| Table 5-2 - Conformance with SSCD-3 PP (SPD and Objectives) .....                | 27 |
| Table 5-3 - Conformance with SSCD-6 PP (SFR) .....                               | 29 |
| Table 11-1 - Mapping of security problem definition to security objectives ..... | 76 |
| Table 11-2 - SFR vs Objectives .....                                             | 80 |